



CHENMKO ENTERPRISE CO.,LTD

**FR601PT
THRU
FR607PT**

FAST RECOVERY RECTIFIER



VOLTAGE RANGE 50 - 1000 Volts CURRENT 6.0 Amperes

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High reliability
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * High surge capability
- * Fast switching

MECHANICAL DATA

Case: JEDEC P-6 molded plastic
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 2.08 grams

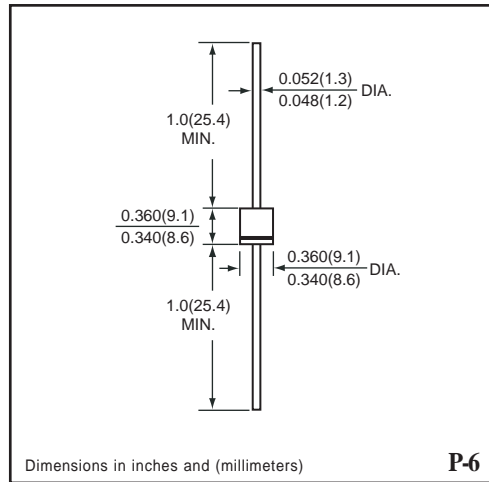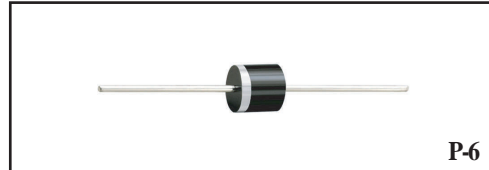

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	FR601PT	FR602PT	FR603PT	FR604PT	FR605PT	FR606PT	FR607PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	Vdc	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current at TA = 75°C	Io	6.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	300							Amps
Typical Junction Capacitance (Note 1)	CJ	150							pF
Operating and Storage Temperature Range	TJ,STG	-65 to +150							°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	FR601PT	FR602PT	FR603PT	FR604PT	FR605PT	FR606PT	FR607PT	UNITS
Maximum Instantaneous Forward Voltage at 6.0 A DC	VF	1.3							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at TA = 25°C	IR	10							uAmps
Maximum Full Load Reverse Current Average, Full Cycle 0.375" (9.5mm) lead length at TL = 55°C		150							uAmps
Maximum Reverse Recovery Time (Note 2)	trr	150				250	500		nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
 2. Test Conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A

Lead free devices

RATING CHARACTERISTIC CURVES (FR601PT THRU FR607PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

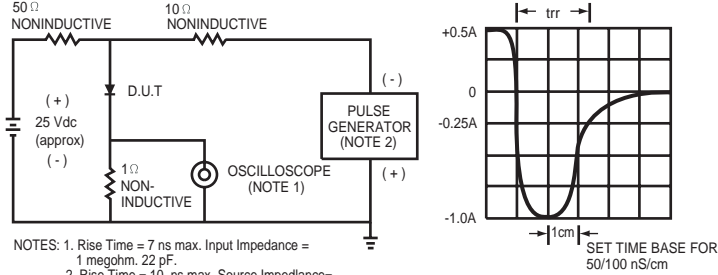

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm, 22 pF.
2. Rise Time = 10 ns max. Source Impedance = 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

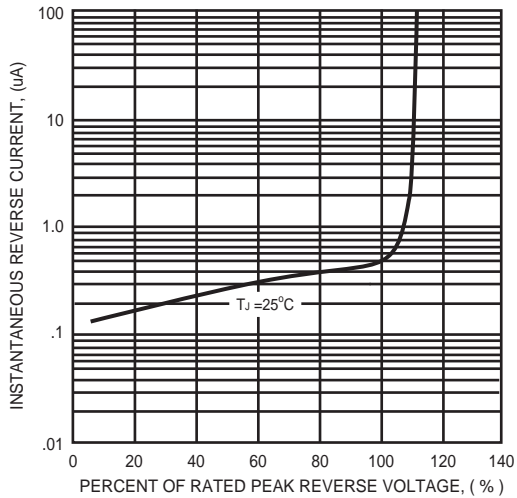


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

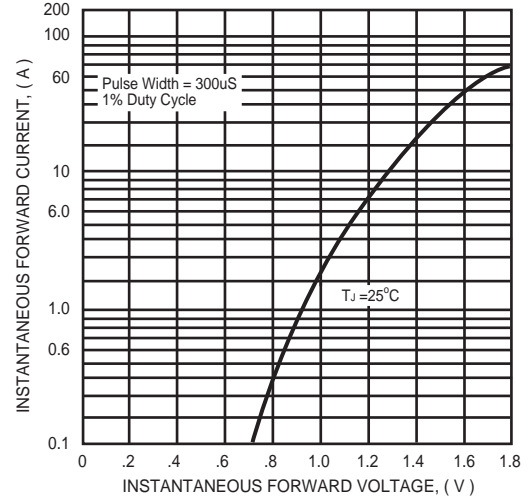


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

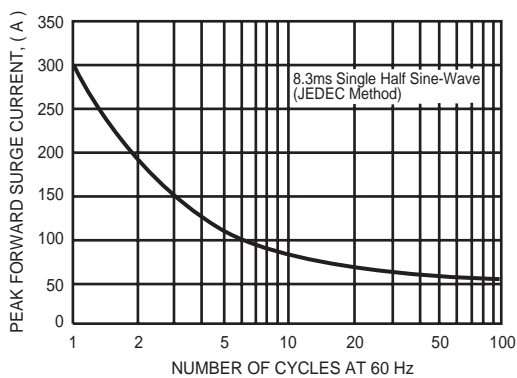


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

