


3 POSITION SELECTOR SWITCH CONTACT BLOCK OPERATION GUIDE

\odot	(A)	(2)	CONTACT BLOCK GUIDE
\sim	<u> </u>	\simeq	CONTACT BECOM COIDE
×	0	0	1 NO (left)
0	×	0	2 NC in series (side × side)
0	0	×	1 NO (right)
×	×	0	1 NC (right)
0	×	×	1 NC (left)
×	0	×	2 NO in parallel (side × side)

(Left or right as seen from front of operator)

REVISION FOR DWG #		DWG #	1PB-2ASLxLB-y-zzz			
	REV	CH.NO.		DESCRIPTION	DATE	REVISED BY
	-	-		ORIGINAL DESIGN	11/01/07	PHILIPP E.

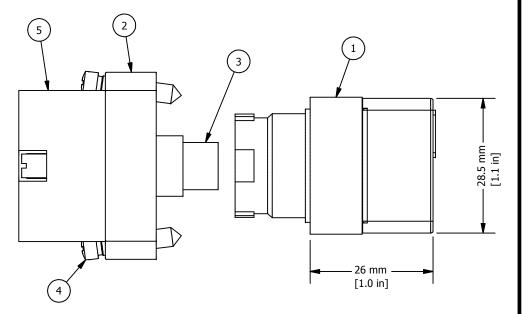

7	5	6
	37 mm —	max. 6mm [.25 in]
	[1.5 in] —— 61 mm ——— [2.4 in] 5 mm ———— 3.4 in]	<u> </u>

zzz = Voltage

012 = 12V AC/DC 024 = 24V AC/DC 048 = 48V AC/DC 110 = 110V AC/DC 230 = 230V AC 230D = 230V DC

y = Voltage

1 = 2 Position Maintained
2 = 2 Position Spring Return
3 = 3 Position Spring Return from left and right
4 = 3 Position Spring Return from right
5 = 3 Position Spring Return from right
6 = 3 Position Spring Return from

Ī	ITEM	DESCRIPTION	CAT. NO.	COLOR	MIN. QTY.	MAX. QTY.
_			2ASL1LB-y-zzz	White	1	1
		LED Illuminated Metal Selector Switch	2ASL3LB-y-zzz	Green	1	1
			2ASL4LB-y-zzz	Red	1	1
	1*		2ASL5LB-y-zzz	Amber	1	1
			2ASL6LB-y-zzz	Blue	1	1
			2ASL7LB-y-zzz	Clear	1	1
			2ASL8LB-y-zzz	Yellow	1	1
_	2*	Mounting Bracket	2BRK	-	1	1
_	3*	LED Bulb	MCB9xzzz	-	1	1
	4*	Mounting Bracket Screws	incl. in 2BRK	-	2	2
_	5*	Blub Holder	2LHB	-	1	1
	6	Panel	-	-	-	-
			S1	Green	1	4
	7**	Switch Contacts	S2	Red	1	4
		Switch Contacts	S3	Green/Gray	1	4
			S4	Red/Gray	1	4

UNLESS OTHERWISE SPECIFIED:

• ALL DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION

and LED (ITEM 1,2,3,4 and 5)

Switch Contacts must be order separatly

This Drawing is the property of Corp.

35 Royal Road Flemington, NJ 08822-6000 (908) 806-9400 Fax (908) 806-9490

Selector Switch is supplied with mounting bracket, bulb holder

AND IS A CONFIDENTIAL DISCLOSURELENT WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.

22 mm LED Illuminated Metal Selector Switch Operator 2ASLxLB-y-zzz (x=color, y=type, zzz=voltage)

DRAWN BY: Philipp Ernstberger	11/01/07	DRAWING NO.:				REV.:	
 CHECKED BY: Laszlo Gyorgypal	11/01/07	1PB-2ASLxLB-y-zzz					
RELEASED BY: Laszlo Gyorgypal	11/01/07	SCALE:	-	SHEET: 1	OF: 1	1	