


**FEMALE HEADERS**

**FEMALE HEADER STRAIGHT - 6.6mm PROFILE**

- Industry compatible
- Competitively priced
- Single or dual row
- No. of contacts 02-80
- Selective Gold plated contacts
- 2.54mm pitch

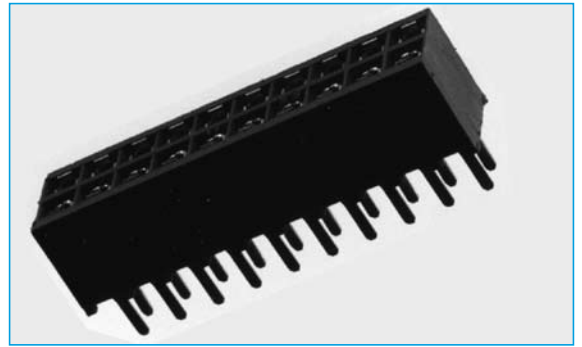

SECTION 8

**SPECIFICATION**



**Material & Finish**

<b>Contact Material:</b>	Phosphor Bronze
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL-94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max
<b>Insulator Resistance:</b>	3000M $\Omega$ Min

**Dielectric Withstanding**

<b>Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

**OUTLINE DRAWING**

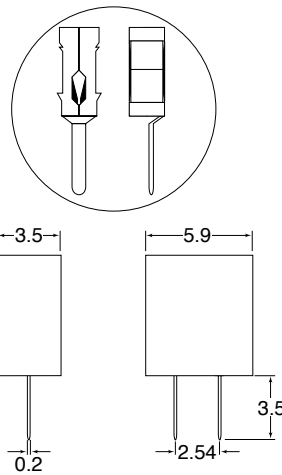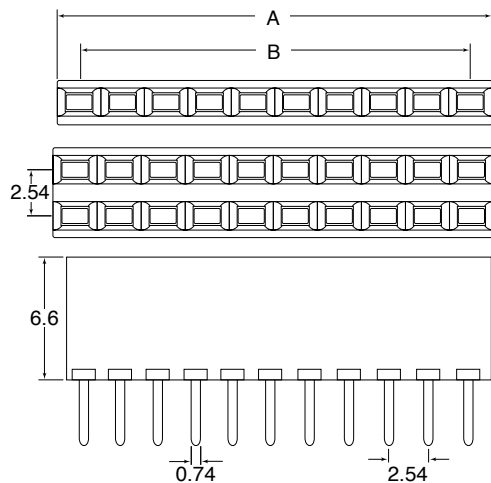

A = 2.54mm x N° of Contacts  
 B = (2.54mm x N° of Contacts) -1

**ORDERING INFORMATION**

<b>DBC</b>	<b>IDC</b>	<b>B5</b>	<b>S</b>	<b>04</b>	<b>B</b>	<b>S</b>	<b>1</b>
Dubilier Connectors	IDC Connector	Series	N° of Rows	N° of Contacts/per row	Contact Material	Contact Plating	Colour
			S = Single Row D = Dual Row	02=2way Thro to 45=45way	B=Bronze	S=Selective Plating	1=Black