




**1206TC**

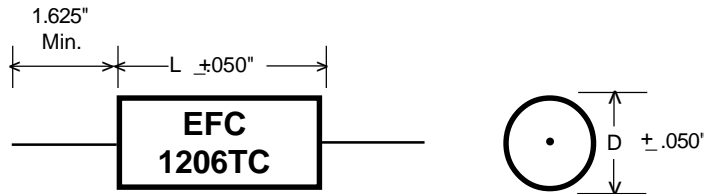

**Tubular  
Wrap and Fill**

Lead Specs.  
Tinned Copperweld  
Under .250D = 24 AWG  
.250 - .440D = 22 AWG  
Above .440D = 20 AWG

**Polypropylene  
and Foil  
Capacitors**

(All dimensions in inches)

**DIMENSIONS and RATINGS**

Cap. μF	1206TC-1 50 VDC		1206TC-2 100 VDC		1206TC-3 150 VDC		1206TC-3 200 VDC		1206TC-3 400 VDC		1206TC-3 600 VDC		
	D	L	D	L	D	L	D	L	D	L	D	L	
.001	.180	.406	.180	.406	.180	.406	.180	.406	.160	.406	.150	.531	
.0012	.180	.406	.180	.406	.180	.406	.180	.406	.170	.406	.160	.531	
.0015	.180	.406	.180	.406	.180	.406	.180	.406	.190	.406	.170	.531	
.0022	.180	.406	.180	.406	.180	.406	.180	.406	.230	.406	.200	.531	
.0027	.180	.406	.180	.406	.180	.406	.180	.406	.250	.406	.220	.531	
.0039	.180	.406	.180	.406	.180	.406	.180	.406	.180	.531	.270	.531	
.0047	.180	.406	.180	.406	.180	.406	.200	.406	.190	.531	.290	.531	
.0056	.180	.406	.180	.406	.180	.406	.210	.406	.210	.531	.230	.656	
.0068	.180	.406	.190	.406	.190	.406	.230	.406	.230	.531	.250	.656	
.0082	.190	.406	.210	.406	.210	.406	.170	.531	.250	.531	.270	.656	
.01	.200	.406	.230	.406	.230	.406	.190	.531	.270	.531	.300	.656	
.012	.220	.406	.250	.406	.250	.406	.200	.531	.290	.531	.330	.656	
.015	.240	.406	.180	.531	.180	.531	.220	.531	.260	.656	.360	.656	
.018	.180	.531	.200	.531	.200	.531	.240	.531	.280	.656	.330	.781	
.022	.190	.531	.210	.531	.210	.531	.270	.531	.310	.656	.360	.781	
.027	.210	.531	.240	.531	.240	.531	.240	.656	.340	.656	.400	.781	
.033	.230	.531	.260	.531	.260	.531	.260	.656	.370	.656	.380	.906	
.039	.250	.531	.280	.531	.280	.531	.280	.656	.350	.781	.420	.906	
.047	.270	.531	.250	.656	.250	.656	.310	.656	.380	.781	.460	.906	
.056	.290	.531	.270	.656	.270	.656	.340	.656	.420	.781	.500	.906	
.068	.260	.656	.290	.656	.290	.656	.370	.656	.400	.906	.450	1.190	
.082	.290	.656	.320	.656	.320	.656	.350	.781	.440	.906	.500	1.190	
.1	.310	.656	.350	.656	.350	.656	.390	.781	.490	.906	.550	1.190	
.12	.340	.656	.340	.781	.340	.781	.420	.781	.450	1.190	.590	1.190	
.15	.380	.656	.370	.781	.370	.781	.420	.906	.500	1.190	.660	1.190	
.18	.360	.781	.410	.781	.410	.781	.460	.906	.550	1.190	.630	1.440	
.22	.390	.781	.400	.906	.400	.906	.500	.906	.600	1.190	.690	1.440	
.27	.390	.906	.440	.906	.440	.906	.480	1.190	.670	1.190	.690	1.690	
.33	.430	.906	.490	.906	.490	.906	.520	1.190	.640	1.440	.760	1.690	
.39	.470	.906	.450	1.190	.450	1.190	.570	1.190	.700	1.440	.830	1.690	
.47	.430	1.190	.490	1.190	.490	1.190	.620	1.190	.690	1.690	.830	1.940	
.56	.470	1.190	.540	1.190	.540	1.190	.590	1.440	.750	1.690	.900	1.940	
.68	.510	1.190	.590	1.190	.590	1.190	.650	1.440	.830	1.690	.990	1.940	
.82	.560	1.190	.650	1.190	.650	1.190	.710	1.440	.830	1.940	1.090	1.940	
1.0	.620	1.190	.630	1.440	.630	1.440	.720	1.190	.920	1.940	1.110	2.250	
1.25	.610	1.440	.700	1.440	.700	1.440	.800	1.190	1.030	1.440	1.240	2.250	
1.5	.670	1.440	.690	1.690	.690	1.690	.800	1.190	1.040	2.250	1.360	2.250	
2.0	.630	1.440	.800	1.690	.800	1.690	.920	1.940	1.200	2.250			
3.0	.700	1.690	.890	1.940	.890	1.940	1.130	1.940					
4.0	.810	1.690	1.030	1.940	1.030	1.940							
5.0			1.150	1.940	1.150	1.940							

**ELECTRONIC FILM CAPACITORS, INC.**

Reidville Industrial Park \* 41 Interstate Lane \* WATERBURY, CONNECTICUT 06705  
Phone (203) 755-5629 FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.