

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	


Table 1. Electrical specifications**Passband: 824 ~ 849 MHz**

Item	Condition (MHz)	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	824~849	-	1.6	2.6	dB	
Ripple	824~849	-	0.4	1.4	dB	
Absolute attenuation	DC~779	40	74	-	dB	
	779~804	25	40	-	dB	
	869~894	36	42	-	dB	
	894~6000	25	50	-	dB	
VSWR (Input)	824~849	-	1.7	2.1	-	
VSWR (Output)	824~849	-	1.7	2.1	-	
Amplitude balance (S ₂₁ /S ₃₁)	824~849	-1.0	-0.1/+0.1	+1.0	dB	
Phase balance (∠S ₂₁ -∠S ₃₁ +180)	824~849	-10	-1/+2	+10	deg.	
Input Impedance	Balanced	200			Ohm	
Output Impedance	Unbalance	50			Ohm	
Input Power	824~849	-	-	+13	dBm	
Operating Temperature		-30 ~ +85			°C	
Device size		1.4typ. x 1.0typ. x 0.5Max.			mm	

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	

Dimensions

Device size: 1.4typ. x 1.0typ. x 0.5max

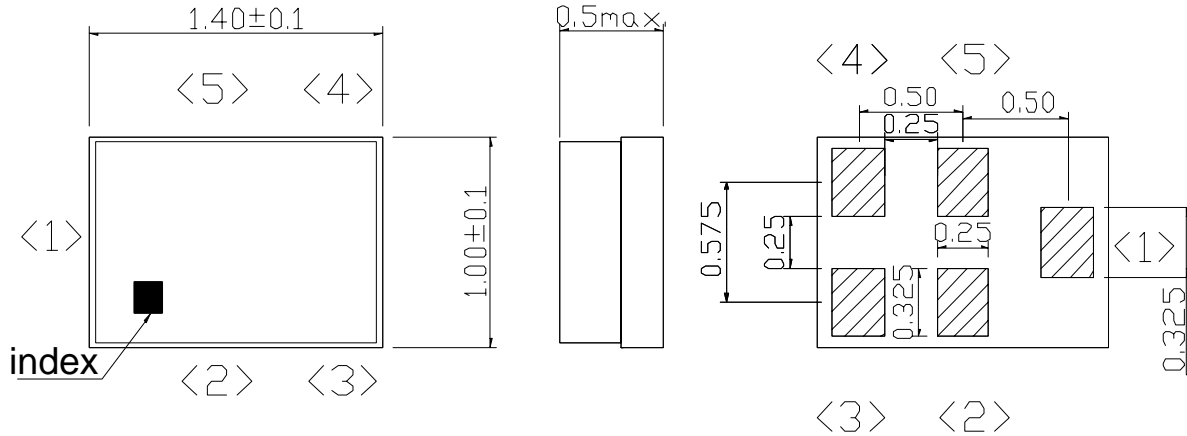


Unit : mm

Pin Configuration

Pin No.	Symbol	Function
1	OUT	Unbalanced pin
2	GND	Ground
3	IN	Balanced pin
4	IN	Balanced pin
5	GND	Ground

Test Condition

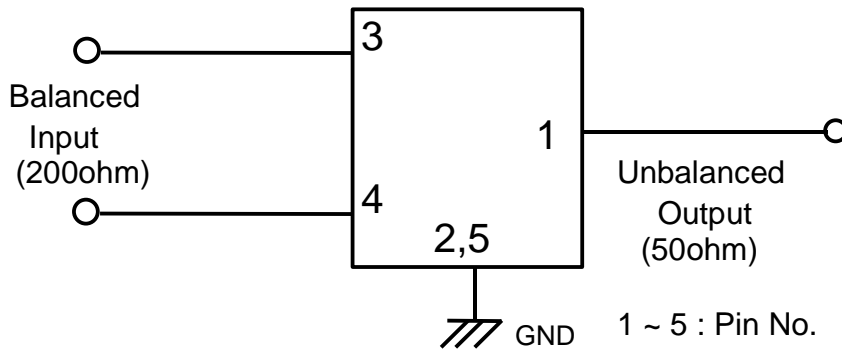

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	

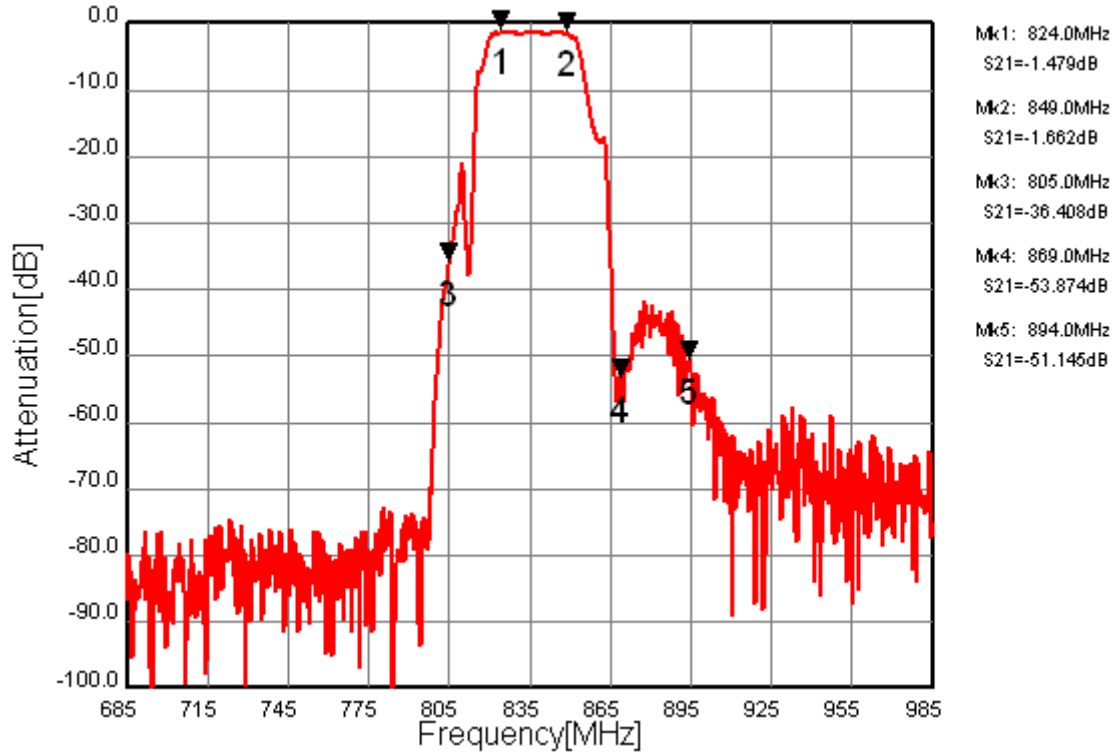


Fig.1 Pass-band Characteristics

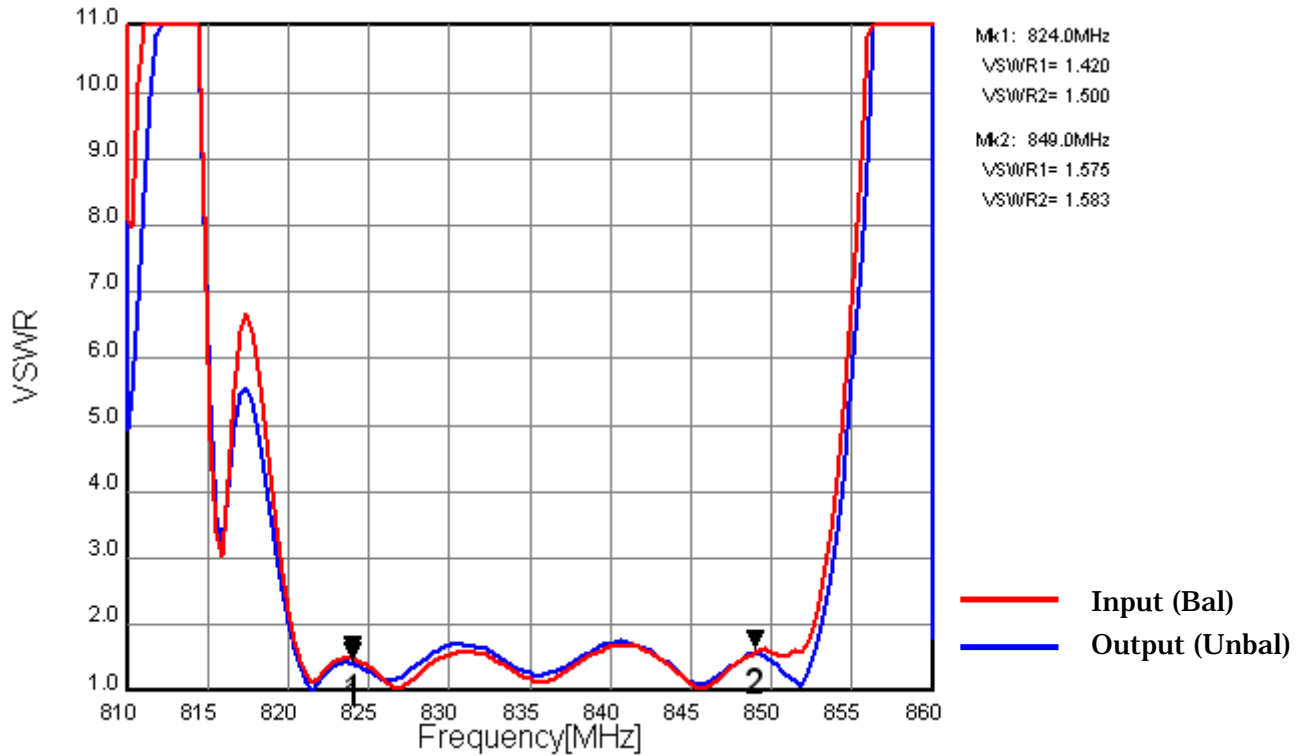


Fig.2 VSWR

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	

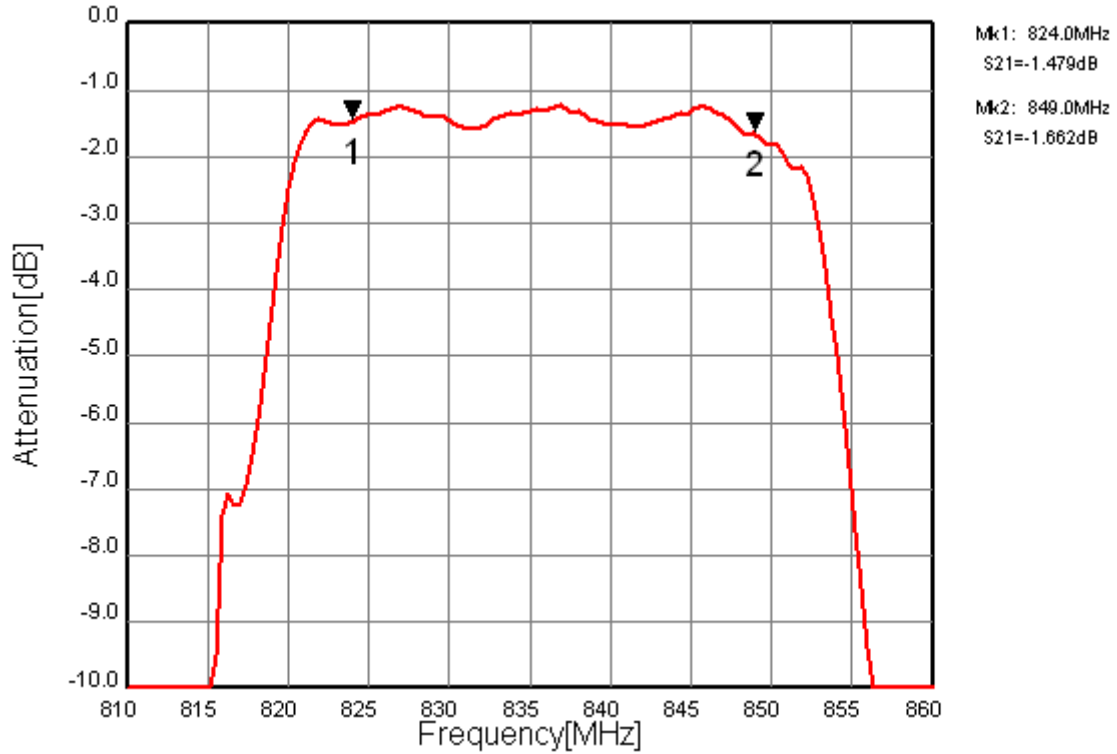


Fig.3 In-band Characteristics

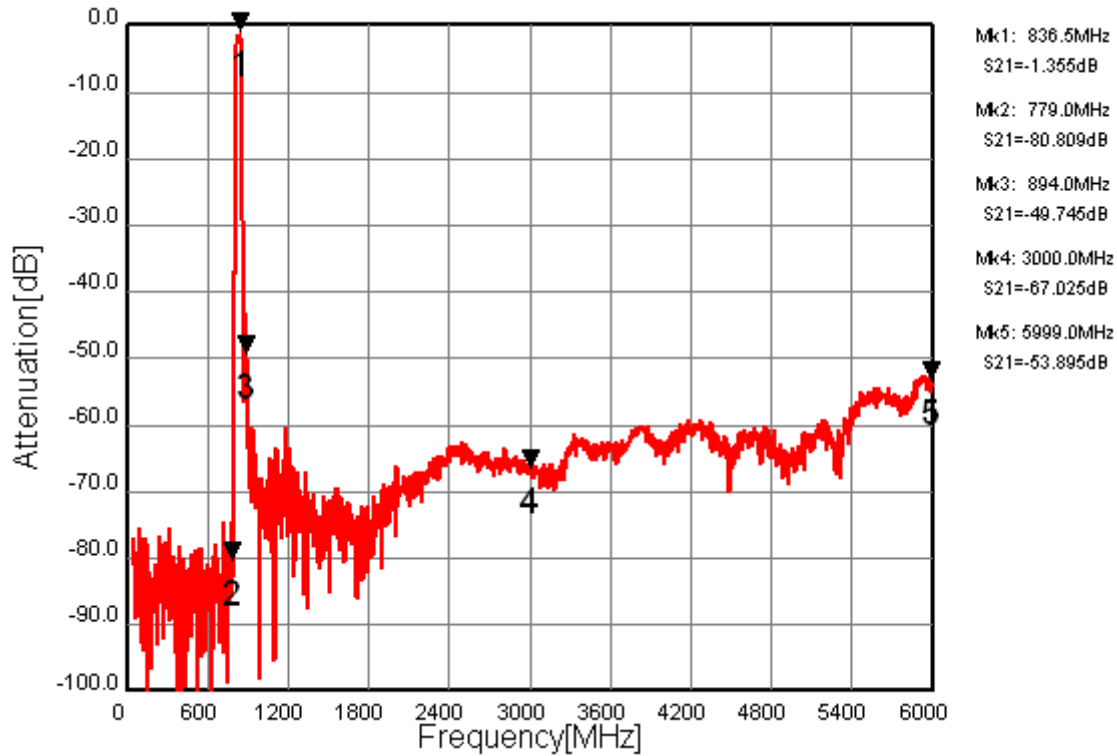


Fig.4 Wide-band Characteristics

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	

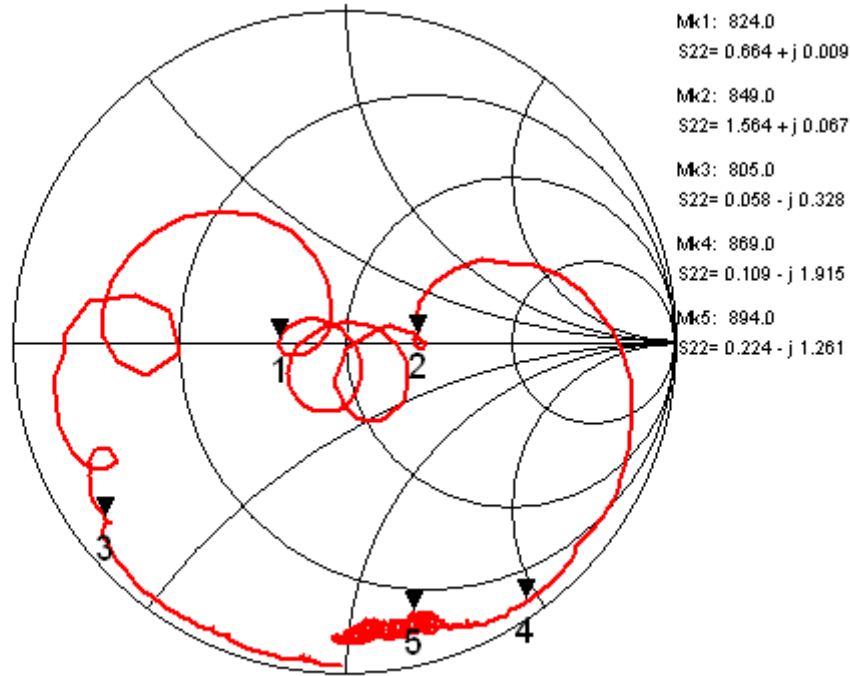


Fig.5 Input Impedance (Balance)

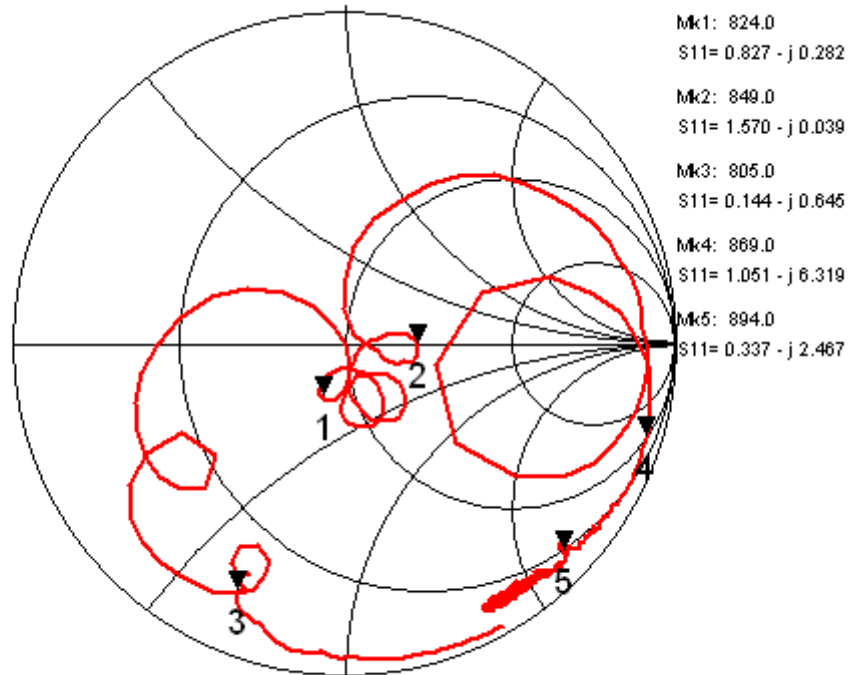


Fig.6 Output Impedance (Unbalance)

Customer Name	Standard Specification	FUJITSU MEDIA DEVICES LIMITED	
System	CDMA Tx (200/50ohm)	DATE	May. 23, 2006
FMD Part Number	FAR-F5KB-836M50-B4EG	Version 3.1c	

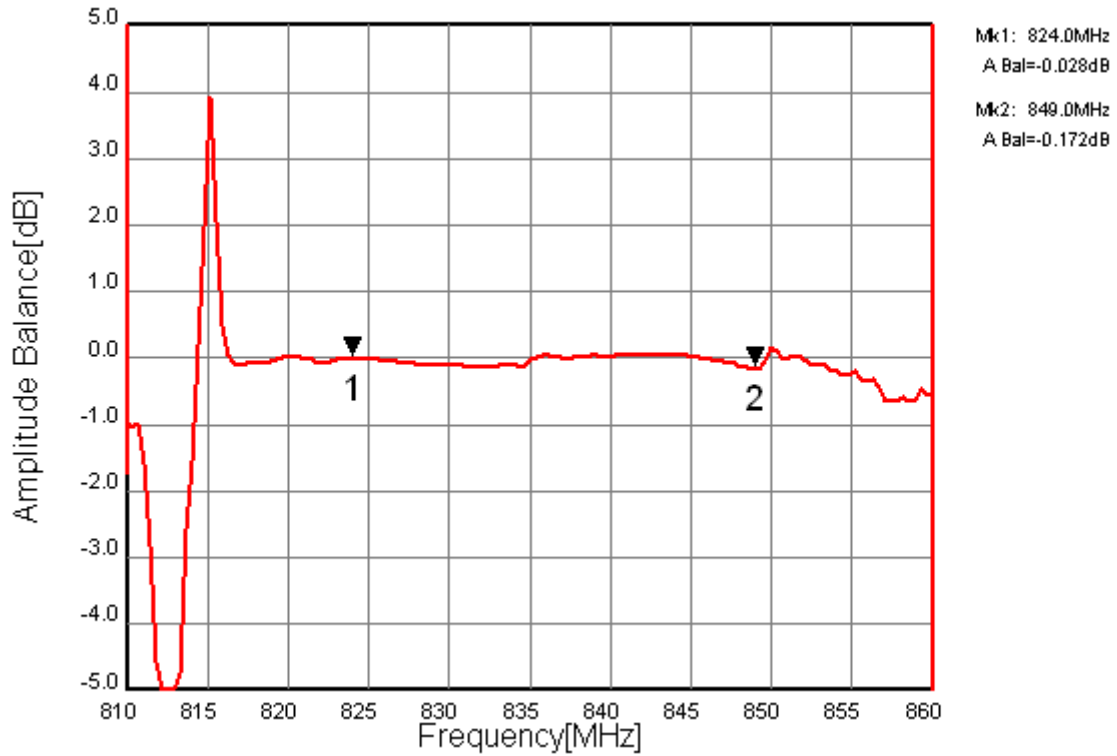


Fig.7 Amplitude Balance

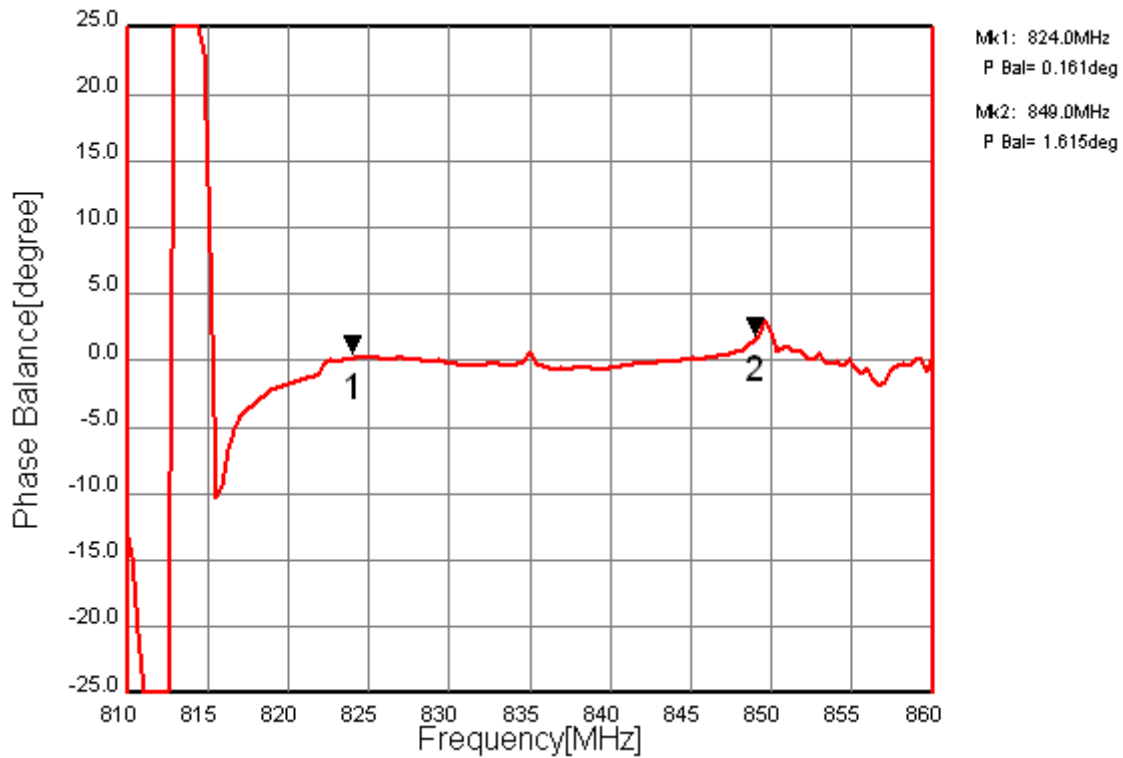


Fig.8 Phase Balance