


### 1. CONFIGURATION & DIMENSIONS :



UNIT : mm (inch)

SIZE (VA)	L	W	H	A-6 6 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
10	48.50 (1.909)	36.51 (1.438)	41.28 (1.625)	10.16 (0.400)	33.02 (1.300)	356.15	10-BR	41.67 (1.641)	28.58 (1.125)

### 2. SCHEMATIC :

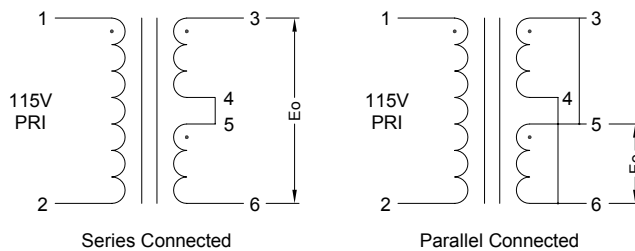

### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

a. Primary Voltage	AC 115 V 60 Hz .
b. No Load Primary Current	Less Than 35mA .
c. Secondary Voltage (±5%)	Series AC 19.90 V . Parallel AC 9.95 V .
d. Secondary Load Current	Series 640mA . Parallel 1280mA .
e. Full Load Primary Current	Less Than 135 mA .
f. Full Load Secondary Voltage (±5%)	Series 16.00V . Parallel 8.00V .
g. DC Resistance	
Pin 1-2	Primary = 71.80 Ohm .
Pin 3-4	Secondary = 1.23 Ohm .
Pin 5-6	= 1.39 Ohm .
h. Insulation Resistance	DC 500V 100Meg Ohm Of More .
i. Withstand Voltage (Hi-Pot)	AC 1500V 60Hz 1 Minutes .
j. Temperature Rise	Less Than 60 Deg C .
k. Core Size	EI-48 x 16.50 m/m .
l. Turns & Wire Gauge	
Primary     Pin 1-2	1325 Turns Diameter 0.18 mm
Secondary-1     Pin 3-4	115 Turns Diameter 0.45 mm
Secondary-2     Pin 5-6	115 Turns Diameter 0.45 mm



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**