


SPECIFICATION FOR APPROVAL

REF :


PAGE: 1

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :


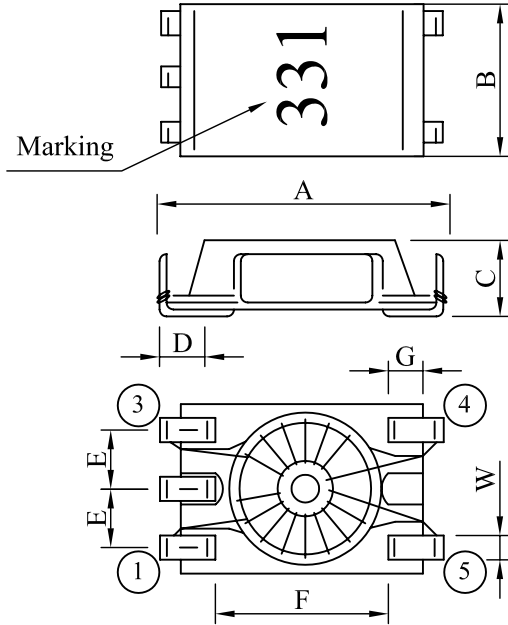


A :	6.50 max.	m / m
B :	3.60±0.15	m / m
C :	1.65±0.15	m / m
D :	0.90 min.	m / m
E :	1.25±0.1	m / m
F :	3.40±0.2	m / m
G :	0.8 max.	m / m
W :	0.55±0.1	m / m

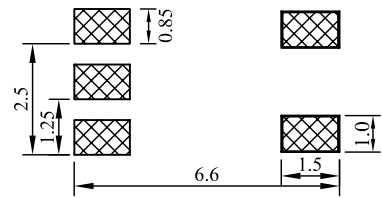

(PCB Pattern)

II . SCHEMATIC DIAGRAM :

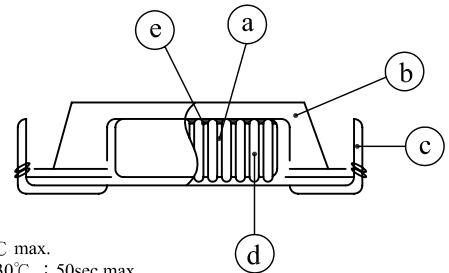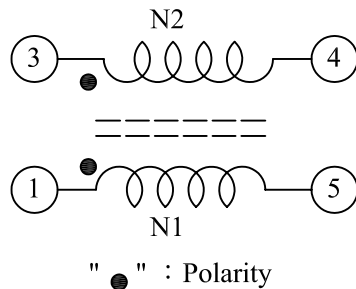


Peak Temp : 260°C max.
 Max time above 230°C : 50sec max.
 Max time above 200°C : 70sec max.

III . MATERIALS :

- a . Core : Ferrite toroidal core
- b . Base : LCP
- c . Terminal : Cu/Ni/Sn
- d . Wire : Enamelled copper wire (class F)
- e . Adhesive : Epoxy resin
- f . Remark : Products comply with RoHS' requirements

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 20°C max. at rated current
- b . Storage temp. : -40°C ----+85°C
- c . Operating temp. : -40°C ----+85°C
- d . Resistance to solder heat : 260°C .10 secs.

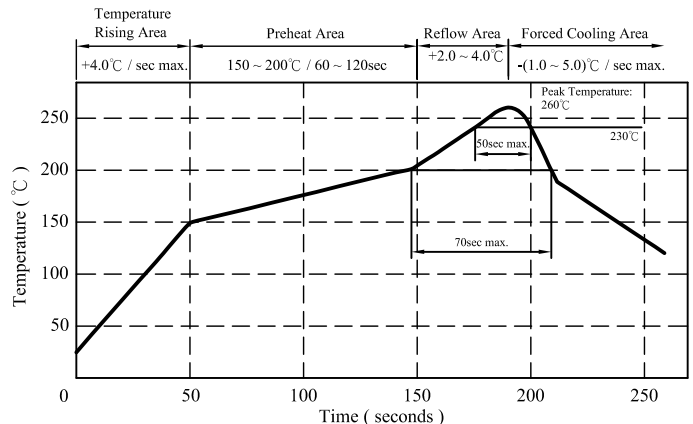

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2


PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :


DWG No.	L (uH)	L-L (uH) max.	RDC (Ω) max. N1=N2	Rated current (mA)	HI-POT Test	Impedance (Z)	
						Freq. range MHz	min (Ω)
SF0602100YL□-□□□	10±50%	1.0	0.24	300	250 Vac 60 Hz 3 mA 1 minute	35 ~ 570	600
SF0602470YL□-□□□	47±50%	4.0	0.16	300		4 ~ 1600	140
SF0602820YL□-□□□	82±50%	4.0	0.20	300		3 ~ 850	220
SF0602101YL□-□□□	100±50%	8.0	0.22	300		3 ~ 660	260
SF0602181YL□-□□□	180±50%	8.0	0.25	300		3 ~ 250	500
SF0602221YL□-□□□	220±50%	10.0	0.28	300		3 ~ 210	600
SF0602331YL□-□□□	330±50%	10.0	0.30	300		3 ~ 120	900

- 1). Packing information : [A]: Bulk [B]: Taping Reel
- 2). "-□□□": Reference code
- 3). Test equipment : Inductance (HP-4274A , 2mV/10KHz)
RDC (CH-502AC)
Impedance (HP-4291A)
- 4). Nominal voltage : 60Vdc
- 5). Rated current : Base on series both winding.

VI . IMPEDANCE VS . FREQUENCY :

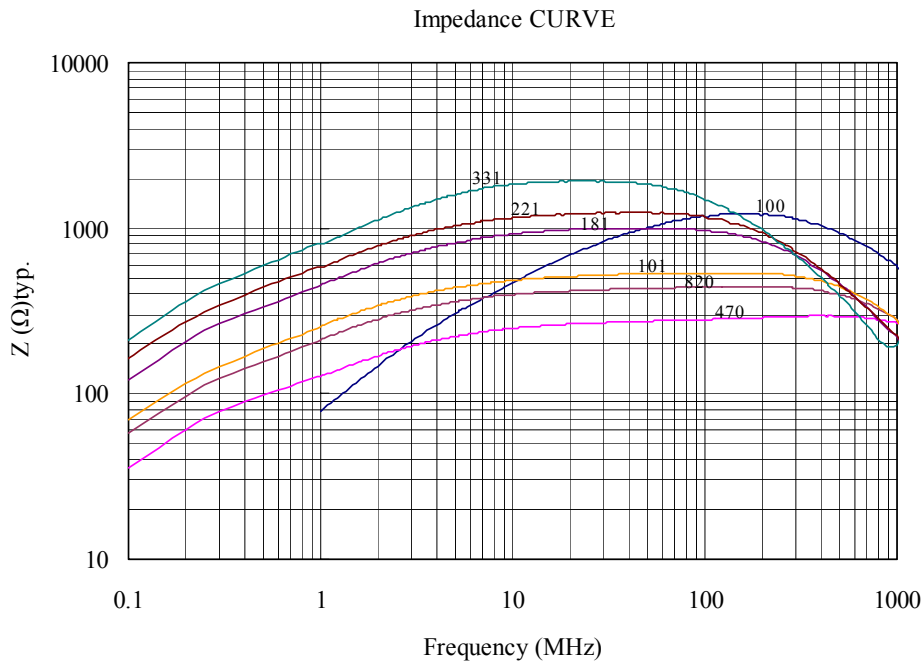

Measuring Circuit :



RF Impedance Analyzer

SPECIFICATION FOR APPROVAL


REF :

PAGE: 3


PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

VII . PACKAGING INFORMATION

(1) Configuration

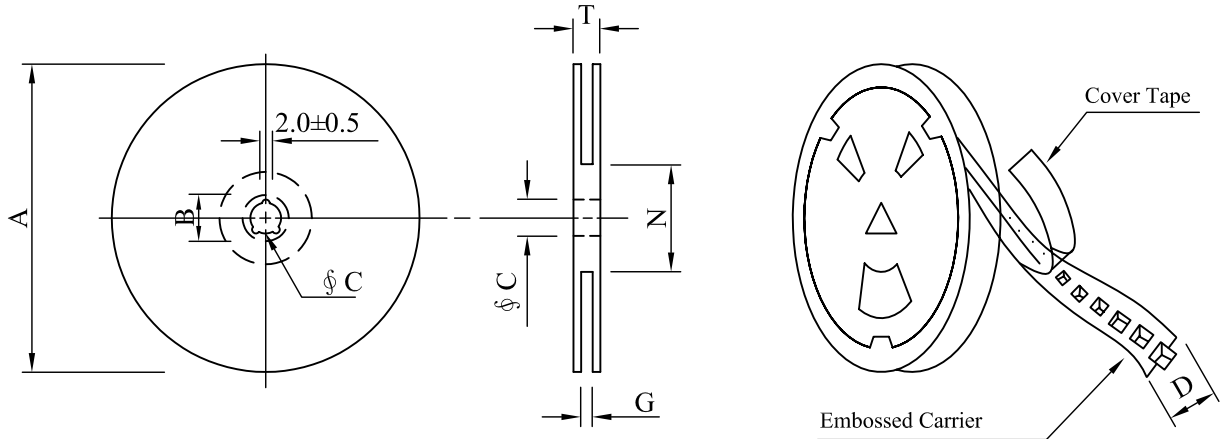

※Carrier tape width : D

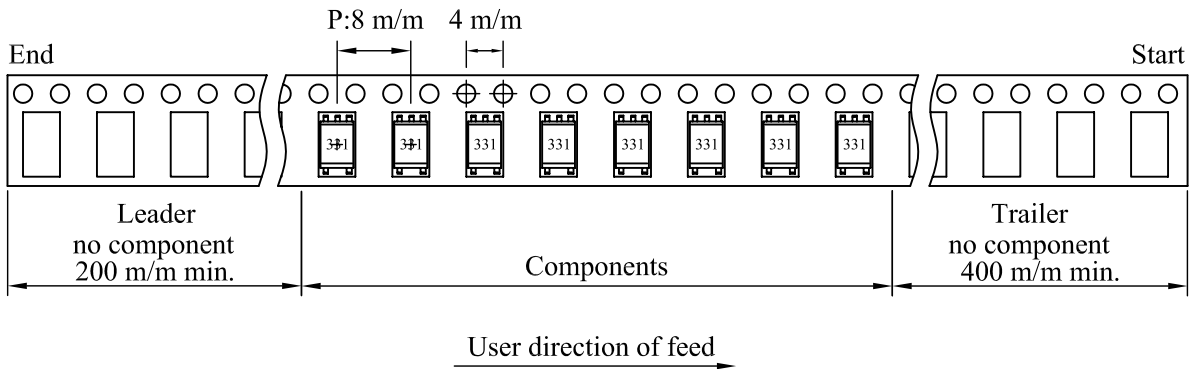

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SF0602	1,000	200	07 - 12	40,000	7.5	42x 41 x 24


SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :



- Reference code
- Appendix code 2 : Package
- Appendix code 1 : Classification
- Tolerance code
- Electrical code
- Dimension code
- Type code

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	1000 pcs	

SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

IX . RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25°C for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-25±2 °C 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">85±2 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-25±2 °C 30 minutes	Room temp. 15 minutes	→	85±2 °C 30 minutes
Room temp. 15 minutes		→	-25±2 °C 30 minutes					
Room temp. 15 minutes		→	85±2 °C 30 minutes					
Humidity Resistance test		Temperature : 40±2°C Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test	Temperature : 80±2°C Applied current : Per spec. Time : 500 hours							

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0602□□□□L□-□□□
		ABC'S ITEM NO.	

X . UL CARD :

OBMW2
September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD
E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	---	Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide	---	Polyamide	---	180
EILOCKW	---	Polyesterimide	---	Modified Epoxy	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL_EILOCKY	---	Modified Polyester	---	Polyamide	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	---	Nylon	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	---	Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide	---	Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide	---	Modified Polyamide	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002
Page 1 of 2
A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	---	Polyamide	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	---	Nylon	MW28-C	130
UEY-2	---	Polyurethane	---	Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
LZ - Signifies magned wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks or 榮星電線 , material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002
Page 2 of 2
OBMW2E174837
September 8 , 2000