

RL201 THRU RL207

GENERAL PURPOSE PLASTIC RECTIFIER

VOLTAGE:50 TO 1000V CURRENT; 2.0A




FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
High surge capability
High temperature soldering guaranteed
250°C/10sec/0.375"lead length at 5 lbs tension

MECHANICAL DATA

Terminal:Plated axial leads solderable per
MIL-STD 202E, method 208C
Case:Molded with UL-94 Class V-0 recognized Flame
Retardant Epoxy
Polarity:color band denotes cathode
Mounting position:any

DO-15\DO-201AC

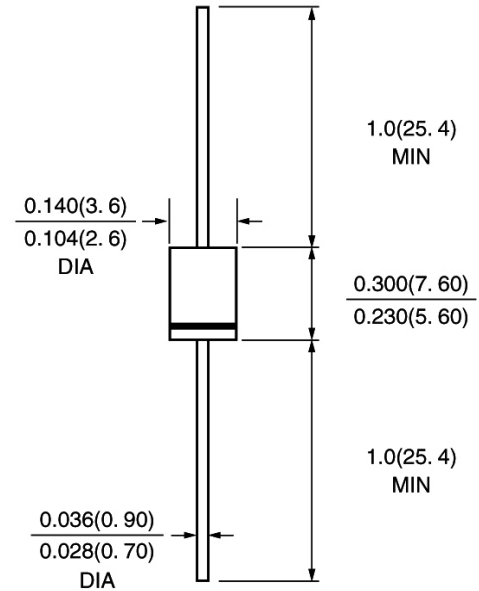

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	SYMBOL	RL 201	RL 202	RL 203	RL 204	RL 205	RL 206	RL 207	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8"lead length at T _a =75°C	I _{f(av)}	2.0							A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I _{fsm}	70.0							A
Maximum Instantaneous Forward Voltage at rated forward current	V _f	1.1							V
Maximum full load reverse current full cycle at T _L =75°C	I _{r(av)}	30.0							μA
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	I _r	5.0 100.0							μA μA
Typical Junction Capacitance (Note 1)	C _j	20.0							pF
Typical Thermal Resistance (Note 2)	R(ja)	40.0							°C/W
Storage and Operation Junction Temperature	T _{stg}	-50 to +150							°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.375"lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES RL201 THRU RL207

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

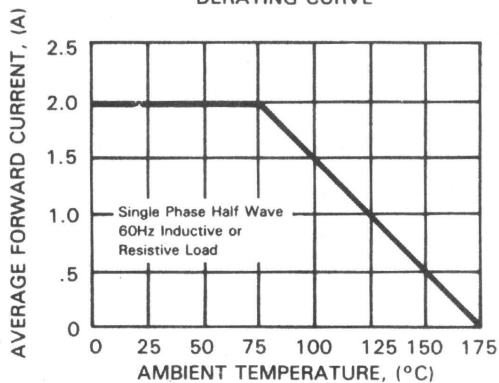


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

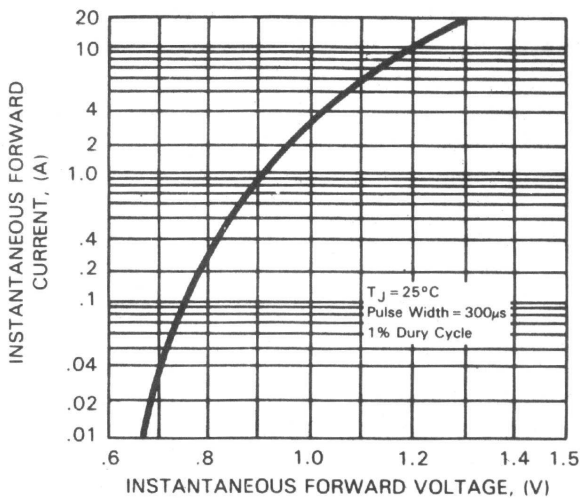


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

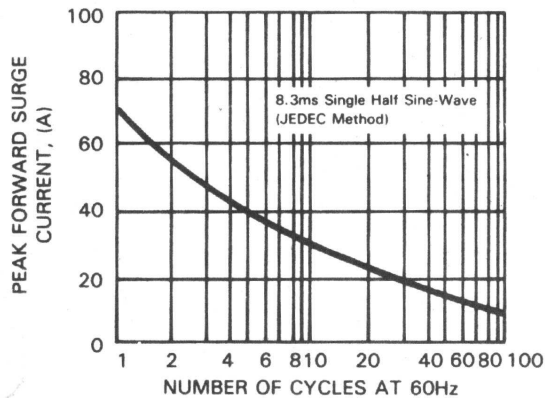


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

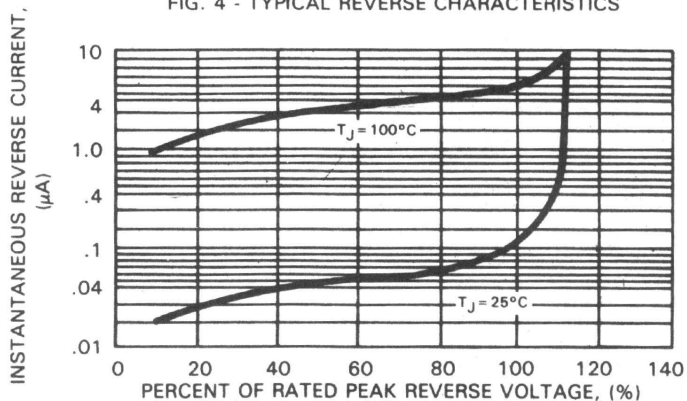


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

