

KBJ401 THRU KBJ407



SINGLE PHASE 4.0 AMP BRIDGE RECTIFIERS



FEATURES

- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Mounting position: Any


VOLTAGE RANGE

50 to 1000 Volts

CURRENT

4.0 Amperes

KBJ

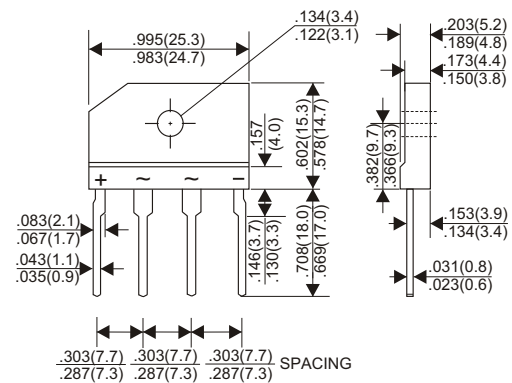

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	KBJ401	KBJ402	KBJ403	KBJ404	KBJ405	KBJ406	KBJ407	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward (with heatsink Note 1)								4.0	
Rectified Current at T _c =110°C (Without heatsink)								2.4	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								150	A
Maximum Forward Voltage Drop per Bridge Element at 2.0A D.C.								1.0	V
Maximum DC Reverse Current T _a =25°C								5.0	A
at Rated DC Blocking Voltage T _a =100°C								500	A
Typical Thermal Resistance R _{jc} (Note 2)								5.5	°C/W
Typical Thermal Resistance R _{jl} (Note 3)								6.0	°C/W
Operating Temperature Range, T _J								-55 — +150	°C
Storage Temperature Range, T _{stg}								-55 — +150	°C

NOTES

1. Device mounted on 50mm x 50mm x 1.6mm Cu Plate Heatsink.
2. Thermal Resistance from Junction to Case with device mounted on 50mm x 50mm x 1.6mm Cu Plate Heatsink.
3. Thermal Resistance from Junction to Lead without Heatsink.

RATING AND CHARACTERISTIC CURVES (KBJ401 THRU KBJ407)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

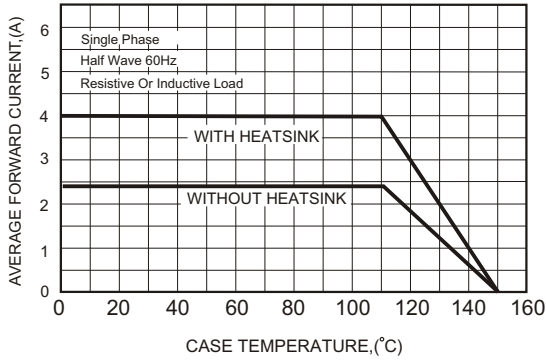


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

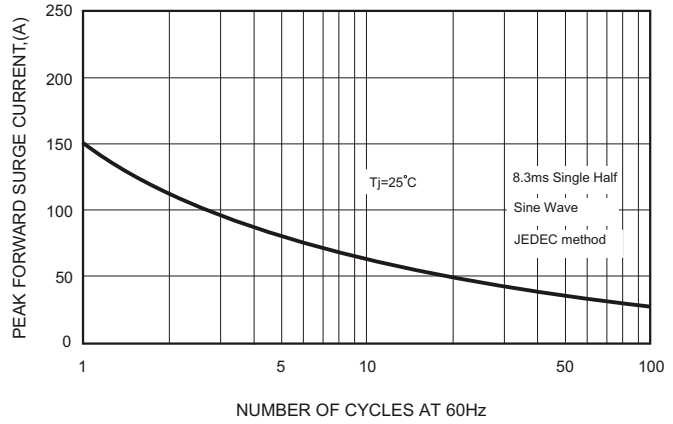


FIG.3-TYPICAL FORWARD CHARACTERISTICS

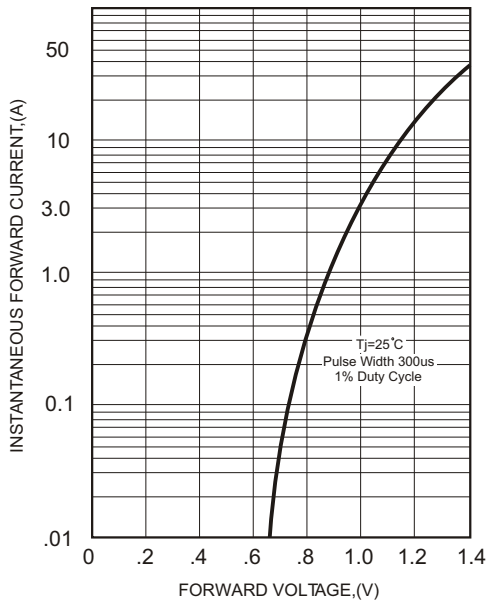


FIG.4-TYPICAL REVERSE CHARACTERISTICS

