

**BOARD TO BOARD/WIRE**

- Compatible with other leading manufacturers
- Competitively priced
- Tin plated contacts
- 04-26 contacts

**MINIATURE RIBBON CABLE SYSTEM - CABLE SOCKET**



SECTION 8

**SPECIFICATION**

**Material & Finish**


**Insulator:** PTB, glass reinforced , rated UL 9V-0  
**Contact:** Phosphor Bronze

**Electrical Characteristics**




**Rating Current:** 1 Amp DC  
**Contact Resistance:** 30 mΩ max.  
**Insulation Resistance:** 3000 MΩ min.  
**Dielectric Voltage:** 500v AC for 1 minute  
**Operating Temperature:** -40°C to +105°C

\*Terminated with 1.27mm pitch flat ribbon cable.  
 \*Mating suggestion: A33b, A33c series

**OUTLINE DRAWING**

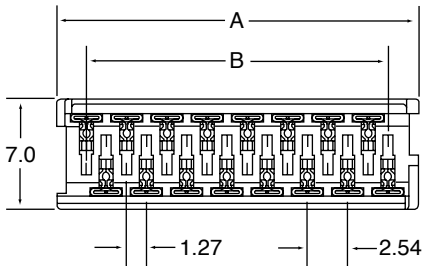

Position	A	B
4	7.59	3.81
6	10.13	6.35
8	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.39	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
26	35.53	31.75



**ORDERING INFORMATION**

DBC	A33	10	B	T	5
Dubilier Connectors	Series	No. of Contacts	Contact Material	Contact Plating	Colour
		04 = 04 way 06 = 06 way 08 = 08 way 10 = 10 way 12 = 12 way 14 = 14 way 16 = 16 way 18 = 18 way 20 = 20 way 26 = 26 way	B = Phosphor Bronze	T = Tin Plating	5 = White