
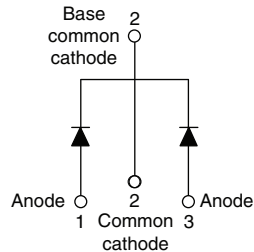


High Performance Schottky Generation 5.0, 2 x 30 A


TO-247AC

FEATURES

- 175 °C high performance Schottky diode
- Very low forward voltage drop
- Extremely low reverse leakage
- Optimized V_F vs. I_F trade off for high efficiency
- Increased ruggedness for reverse avalanche capability
- RBSOA available
- Negligible switching losses
- Submicron trench technology
- Full lead (Pb)-free and RoHS compliant devices
- Designed and qualified for industrial level


**RoHS
COMPLIANT**
PRODUCT SUMMARY

| | |
|-------------------------|----------|
| $I_{F(AV)}$ | 2 x 30 A |
| V_R | 100 V |
| V_F at 30 A at 125 °C | 0.64 V |

APPLICATIONS

- High efficiency SMPS
- Automotive
- High frequency switching
- Output rectification
- Reverse battery protection
- Freewheeling
- Dc-to-dc systems
- Increased power density systems

MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL | CHARACTERISTICS | VALUES | UNITS |
|-------------|---|-------------|-------|
| $I_{F(AV)}$ | Rectangular waveform | 60 | A |
| V_{RRM} | | 100 | V |
| V_F | 30 Apk, $T_J = 125$ °C (typical, per leg) | 0.61 | |
| T_J | Range | - 55 to 175 | °C |

VOLTAGE RATINGS

| PARAMETER | SYMBOL | TEST CONDITIONS | 63CPT100 | UNITS |
|----------------------------|--------|-----------------|----------|-------|
| Maximum DC reverse voltage | V_R | $T_J = 25$ °C | 100 | V |

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | TEST CONDITIONS | VALUES | UNITS |
|--|-------------|---|------------------------|-------|
| Maximum average forward current <small>per leg</small> <small>per device</small> | $I_{F(AV)}$ | 50 % duty cycle at $T_C = 156$ °C, rectangular waveform | 30 | A |
| | | | 60 | |
| Maximum peak one cycle non-repetitive surge current | I_{FSM} | 5 μ s sine or 3 μ s rect. pulse | 2200 | A |
| | | 10 ms sine or 6 ms rect. pulse | 450 | |
| Non-repetitive avalanche energy | E_{AS} | $T_J = 25$ °C, $I_{AS} = 3$ A, $L = 30$ mH | 135 | mJ |
| Repetitive avalanche current | I_{AR} | Limited by frequency of operation and time pulse duration so that $T_J < T_J$ max. I_{AS} at T_J max. as a function of time pulse See fig. 8 | I_{AS} at T_J max. | A |

| ELECTRICAL SPECIFICATIONS | | | | | | |
|---------------------------------|----------------|---|-----------------------------------|------|--------|------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | TYP. | MAX. | UNITS |
| Forward voltage drop per leg | $V_{FM}^{(1)}$ | 30 A | $T_J = 25\text{ }^\circ\text{C}$ | - | 0.77 | V |
| | | 60 A | | - | 0.9 | |
| | | 30A | $T_J = 125\text{ }^\circ\text{C}$ | - | 0.64 | |
| | | 60 A | | - | 076 | |
| Reverse leakage current per leg | $I_{RM}^{(1)}$ | $T_J = 25\text{ }^\circ\text{C}$ | $V_R = \text{Rated } V_R$ | - | 200 | μA |
| | | $T_J = 125\text{ }^\circ\text{C}$ | | - | 15 | mA |
| Junction capacitance per leg | C_T | $V_R = 5\text{ }V_{DC}$ (test signal range 100 kHz to 1 MHz) $25\text{ }^\circ\text{C}$ | | 1650 | - | pF |
| Series inductance per leg | L_S | Measured lead to lead 5 mm from package body | | 7.5 | - | nH |
| Maximum voltage rate of change | dV/dt | Rated V_R | | - | 10 000 | V/ μs |

Note(1) Pulse width < 300 μs , duty cycle < 2 %

| THERMAL - MECHANICAL SPECIFICATIONS | | | | |
|---|----------------|--------------------------------------|-------------|------------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | VALUES | UNITS |
| Maximum junction and storage temperature range | T_J, T_{Stg} | | - 55 to 175 | $^\circ\text{C}$ |
| Maximum thermal resistance, junction to case per leg | R_{thJC} | DC operation | 0.8 | $^\circ\text{C/W}$ |
| Maximum thermal resistance, junction to case per device | | | 0.4 | |
| Typical thermal resistance, case to heatsink | R_{thCS} | Mounting surface, smooth and greased | 0.25 | |
| Approximate weight | | | 6 | g |
| | | | 0.21 | oz. |
| Mounting torque | minimum | | 6 (5) | kgf · cm (lbf · in) |
| | maximum | | 12 (10) | |
| Marking device | | Case style TO-247AC | 63CPT100 | |

High Performance
Schottky Generation 5.0,
2 x 30 A

Vishay High Power Products

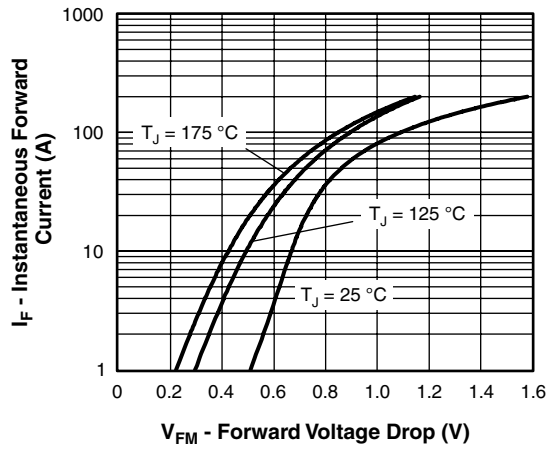


Fig. 1 - Maximum Forward Voltage Drop Characteristics

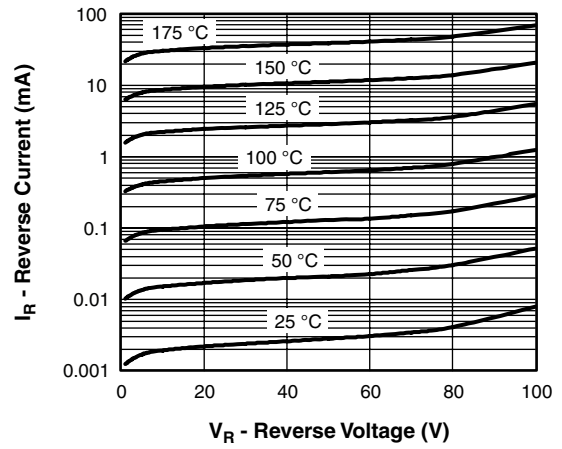


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

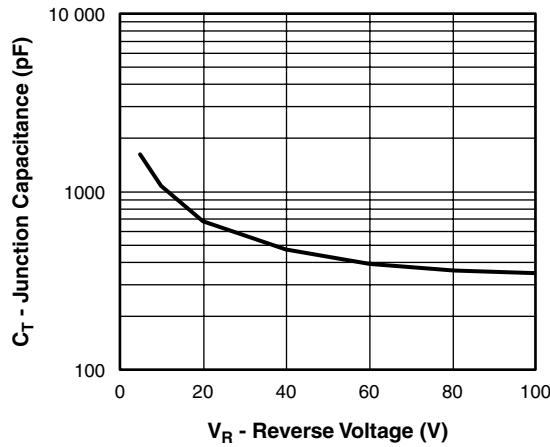


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

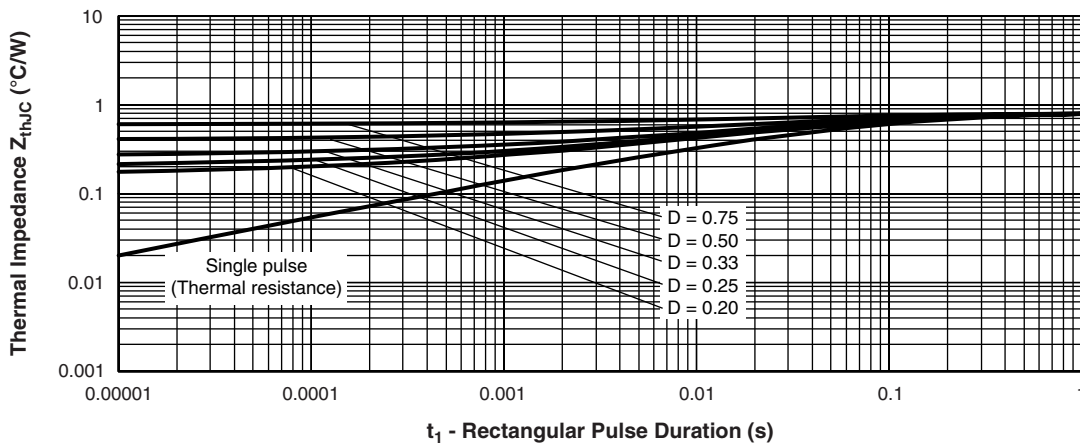


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

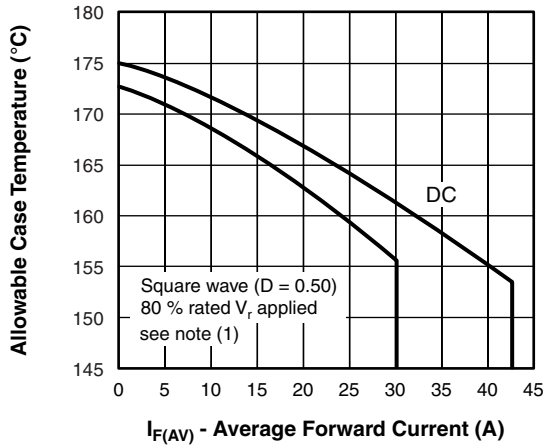


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

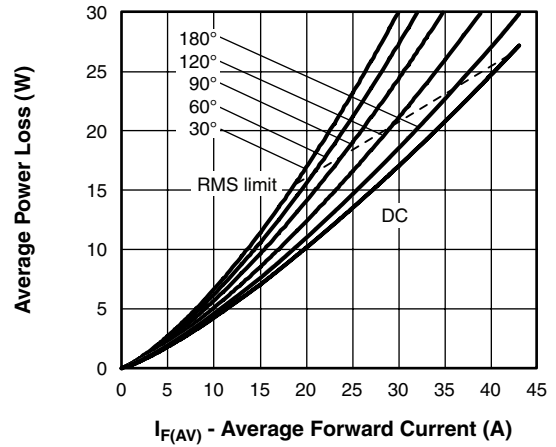


Fig. 6 - Forward Power Loss Characteristics

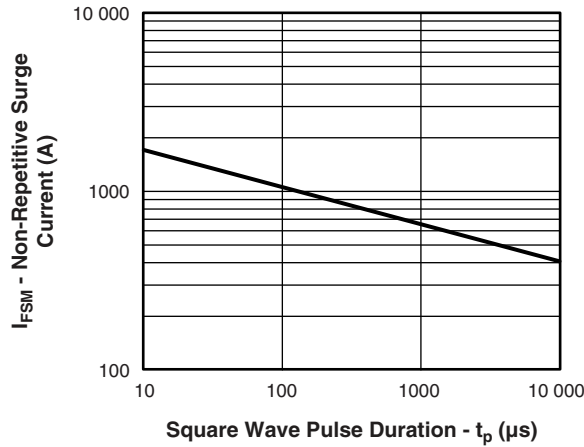


Fig. 7 - Maximum Non-Repetitive Surge Current

Note

- (1) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 P_d = Forward power loss = $I_{F(AV)} \times V_{FM}$ at $(I_{F(AV)}/D)$ (see fig. 6);
 $P_{d_{REV}}$ = Inverse power loss = $V_{R1} \times I_R (1 - D)$; I_R at $V_{R1} = 80\%$ rated V_R



High Performance Schottky Generation 5.0, 2 x 30 A Vishay High Power Products

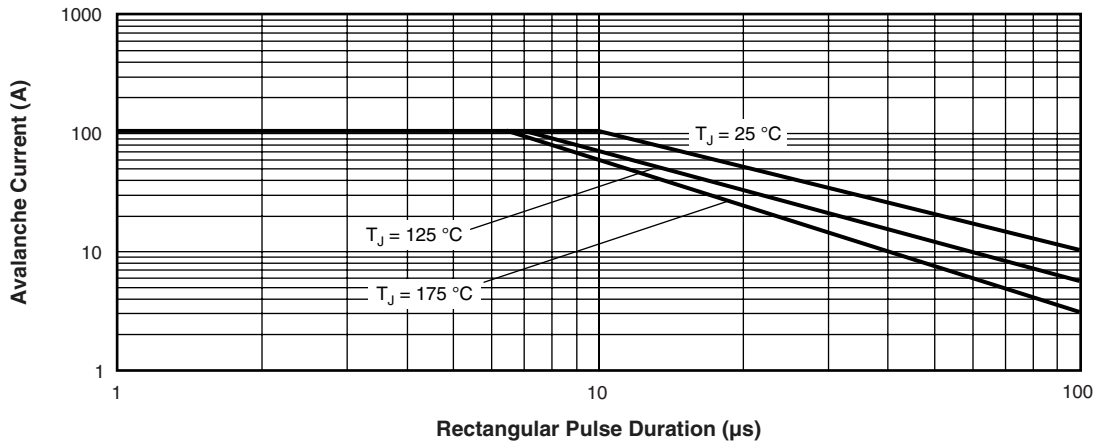


Fig. 8 - Reverse Bias Safe Operating Area (Avalanche Current vs. Rectangular Pulse Duration)


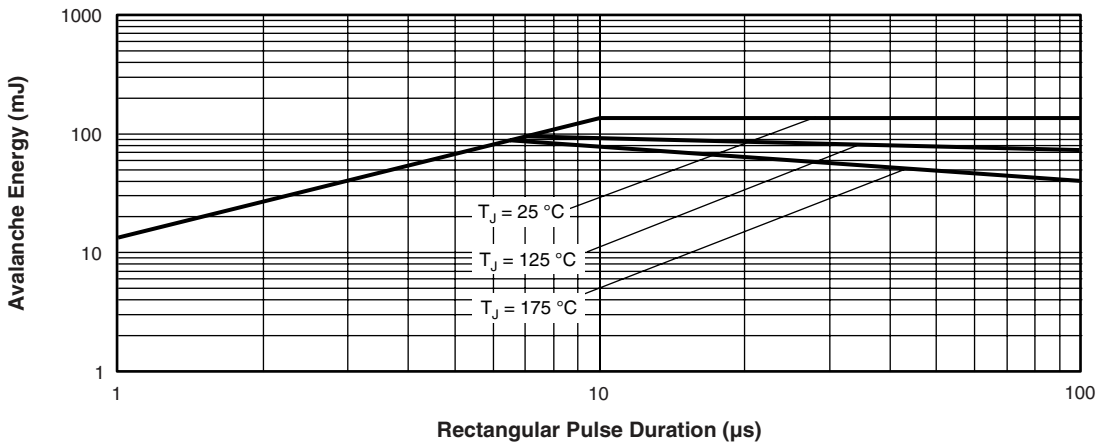


Fig. 9 - Reverse Bias Safe Operating Area (Avalanche Energy vs. Rectangular Pulse Duration)

ORDERING INFORMATION TABLE

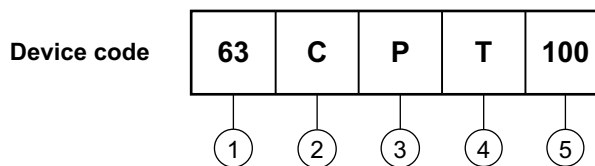

- 1** - Current rating (60 A)
- 2** - Circuit configuration:
C = Common cathode
- 3** - Package:
P = TO-247
- 4** - T = Trench
- 5** - Voltage code (100 V)

Tube standard pack quantity: 25 pieces

| LINKS TO RELATED DOCUMENTS | |
|----------------------------|---|
| Dimensions | http://www.vishay.com/doc?95223 |
| Part marking information | http://www.vishay.com/doc?95226 |
| SPIICE model | http://www.vishay.com/doc?95227 |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.