


## Surface Mount Multilayer Ceramic Chip Capacitors for Film Cap Replacement



### FEATURES

- An alternative to film capacitors for use in high frequency filtering in automotive audio, equalizer and crossover network applications
- Characteristics similar to film capacitors with the reliability of ceramics
- Available in 0603 to 1812 case sizes
- Surface Mount, precious metal technology wet build process



### ELECTRICAL SPECIFICATIONS

**Note:** Electrical characteristics at + 25 °C unless otherwise specified

**Operating Temperature:** - 30 °C to + 85 °C

**Capacitance Range:** 470 pF to 1.0 µF

**Voltage Range:** 25 Vdc

**Temperature Coefficient of Capacitance (TCC):**  
± 4.7 % from - 30 °C to + 85 °C

**Dissipation Factor (DF):**  
3.5 % maximum at 1.0 V<sub>rms</sub> and 1 kHz

**Aging Rate:** 1 % maximum per decade

#### Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less.

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less.

#### Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA

≤ 25 Vdc: DWV at 250 % of rated voltage

ORDERING INFORMATION							
VJ1206	F	104	J	X	X	A	T
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING <sup>(1)</sup>	MARKING	PACKAGING
0603 0805 1206 1210 1812	F = Y5E	Expressed in picofarads (pF). The first two digits are significant, the last digit is the number of zeros to follow. <b>Example:</b> 104 = 100 000 pF	J = ± 5 % K = ± 10 % M = ± 20 %	X = Ni barrier, tin plated finish	X = 25 V	A = Unmarked	T = 7" reel/plastic tape C = 7" reel/paper tape R = 11 1/4" reel/plastic tape P = 11 1/4" reel/paper tape

**Note:**

<sup>(1)</sup> DC voltage rating should not be exceeded in application

DIMENSIONS in inches [millimeters]							
EIA STYLE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)		
					MINIMUM	MAXIMUM	
0603	VJ0603	0.063 ± 0.005 [1.60 ± 0.12]	0.031 ± 0.005 [0.80 ± 0.12]	0.036 [0.92]	0.012 [0.30]	0.018 [0.46]	
0805	VJ0805	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.057 [1.45]	0.010 [0.25]	0.028 [0.71]	
1206	VJ1206	0.126 ± 0.008 [3.20 ± 0.20]	0.063 ± 0.008 [1.60 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]	
1210	VJ1210	0.126 ± 0.008 [3.20 ± 0.20]	0.098 ± 0.008 [2.50 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]	
1812	VJ1812	0.177 ± 0.010 [4.50 ± 0.25]	0.126 ± 0.008 [3.20 ± 0.20]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]	



Vishay Vitramon

Surface Mount Multilayer Ceramic Chip Capacitors  
for Film Cap Replacement





<b>SELECTION CHART</b>						
STYLE		VJ0603	VJ0805	VJ1206	VJ1210 <sup>(1)</sup>	VJ1812 <sup>(1)</sup>
EIA TYPE		0603	0805	1206	1210	1812
VOLTAGE (Vdc)		25	25	25	25	25
CAP. CODE	CAP.					
101	100 pF					
121	120 pF					
151	150 pF					
181	180 pF					
221	220 pF					
271	270 pF					
331	330 pF					
391	390 pF					
471	470 pF	•	•			
561	560 pF	•	•			
681	680 pF	•	•			
821	820 pF	•	•			
102	1000 pF	•	•	•		
122	1200 pF	•	•	•		
152	1500 pF	•	•	•		
182	1800 pF	•	•	•		
222	2200 pF	•	•	•		
272	2700 pF	•	•	•		
332	3300 pF	•	•	•		
392	3900 pF	•	•	•		
472	4700 pF	•	•	•		
562	5600 pF	•	•	•		
682	6800 pF	•	•	•		
822	8200 pF	•	•	•		
103	0.010 μF	•	•	•	•	
123	0.012 μF	•	•	•	•	
153	0.015 μF	•	•	•	•	
183	0.018 μF		•	•	•	
223	0.022 μF		•	•	•	•
273	0.027 μF		•	•	•	•
333	0.033 μF		•	•	•	•
393	0.039 μF			•	•	•
473	0.047 μF			•	•	•
563	0.056 μF			•	•	•
683	0.068 μF			•	•	•
823	0.082 μF			•	•	•
104	0.10 μF			•	•	•
124	0.12 μF				•	•
154	0.15 μF				•	•
184	0.18 μF				•	•
224	0.22 μF				•	•
274	0.27 μF				•	•
334	0.33 μF				•	•
394	0.39 μF					•
474	0.47 μF					•
564	0.56 μF					•
684	0.68 μF					•
824	0.82 μF					•
105	1.0 μF					•
125	1.2 μF					
155	1.5 μF					
185	1.8 μF					
225	2.2 μF					

**Note:**

<sup>(1)</sup> See soldering recommendations within this data book, or visit [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



## CER-F (Y5E) DIELECTRIC - TYPICAL PARAMETERS

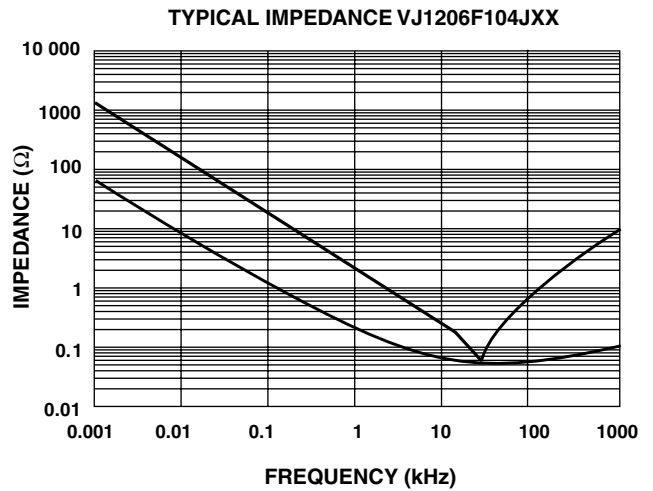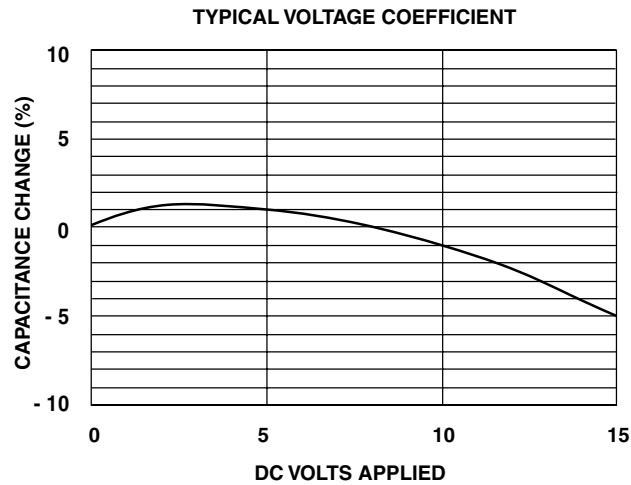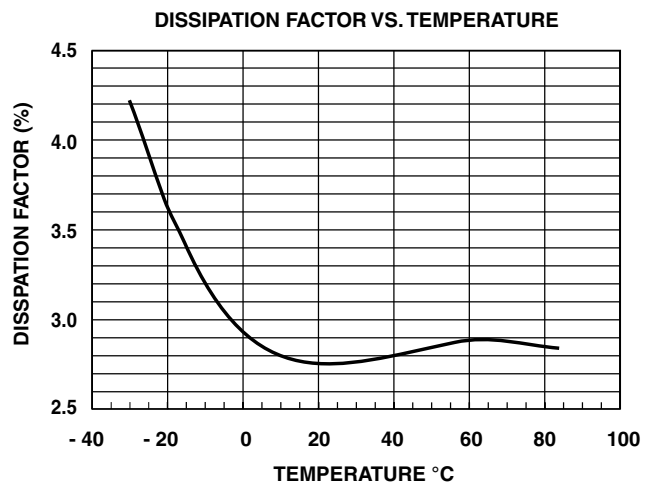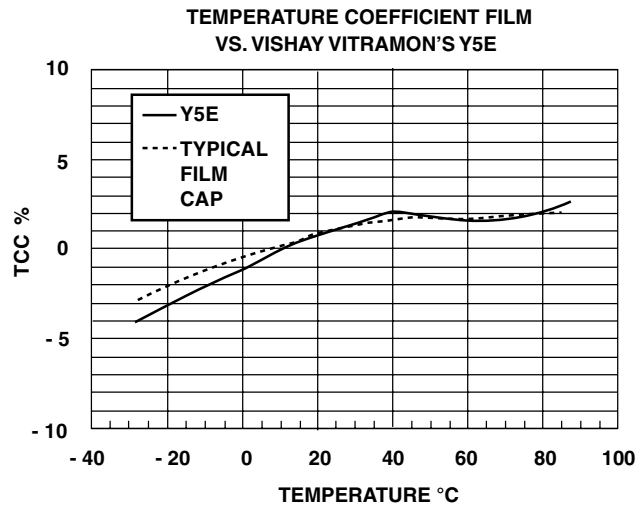



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.