




Polypropylene and Foil Capacitors

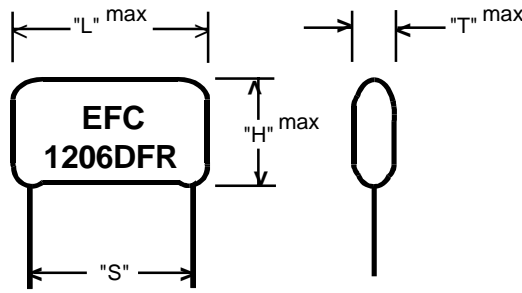

1206DFR

**Epoxy Dipped
(Radial Leads)**

Lead Specs. - Tinned Copperweld

L	S	DIA.
10.5	7.5	0.6
13.0	10.0	0.6
18.5	15.0	0.8
26.0	22.0	0.8
31.0	27.0	0.8
36.0	32.0	0.8
44.0	38.0	0.8

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap.	1206DFR-3 100 VDC			1206DFR-3 160 VDC			1206DFR-3 250 VDC			1206DFR-3 400 VDC			1206DFR-3 630 VDC			1206DFR-3 1000 VDC					
	T	L	H	T	L	H	T	L	H	T	L	H	T	L	H	T	L	H			
.001	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	8.5	10.5	5.0	10.0	13.0			
.0012	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	8.5	10.5	5.0	10.0	13.0			
.0015	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	9.0	10.5	5.5	11.0	13.0			
.0022	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.5	10.5	5.0	9.5	13.0	6.0	12.0	13.0			
.0027	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	9.0	10.5	5.0	9.5	18.5			
.0039	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	9.0	13.0	6.0	12.0	13.0	5.5	11.0	18.5			
.0047	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.5	10.5	4.0	8.5	10.5	5.0	9.5	13.0	6.0	12.0	18.5			
.0056	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	9.0	10.5	5.0	9.5	18.5	6.5	12.5	18.5			
.0068	4.0	8.0	10.5	4.0	8.5	10.5	4.0	8.5	10.5	4.5	9.5	10.5	5.5	11.0	13.0	5.0	10.0	18.5			
.0082	4.0	8.0	10.5	4.0	9.0	10.5	4.0	9.0	10.5	4.5	9.0	13.0	6.0	12.0	13.0	5.5	11.0	18.5			
.01	4.0	8.5	10.5	4.5	9.0	10.5	5.0	10.0	13.0	6.5	12.5	13.0	6.0	12.0	18.5	9.5	17.0	18.5			
.012	4.5	8.5	10.5	4.5	9.0	13.0	5.5	11.0	13.0	5.0	10.0	18.5	6.5	12.5	18.5	7.5	14.0	26.0			
.015	4.5	9.0	10.5	5.0	9.0	13.0	6.0	12.0	13.0	5.5	11.0	18.5	7.0	13.0	18.5	8.5	15.0	26.0			
.018	4.0	8.5	13.0	5.0	10.0	13.0	6.5	12.0	13.0	6.0	12.0	18.5	7.5	13.5	18.5	8.5	16.0	26.0			
.022	4.5	9.0	13.0	5.5	11.0	13.0	6.5	12.5	13.0	6.5	12.5	18.5	8.0	14.0	18.5	9.0	17.0	26.0			
.027	5.0	9.0	13.0	6.0	12.0	13.0	5.5	11.0	18.5	7.5	14.0	18.5	7.5	14.0	26.0	9.5	18.0	26.0			
.033	5.0	10.0	13.0	6.5	12.5	13.0	6.0	12.0	18.5	8.5	15.0	18.5	8.0	15.0	26.0	9.5	18.0	31.0			
.039	5.5	11.0	13.0	5.5	11.0	18.5	6.5	12.5	18.5	7.0	13.0	26.0	8.5	16.0	26.0	10.0	19.0	31.0			
.047	6.0	12.0	13.0	6.0	12.0	18.5	7.0	13.0	18.5	7.5	14.0	26.0	9.5	17.0	26.0	11.0	20.0	31.0			
.056	5.0	10.0	18.5	6.5	12.5	18.5	7.5	13.5	18.5	8.0	15.0	26.0	10.0	19.0	26.0	12.0	22.0	31.0			
.068	5.5	11.0	18.5	7.0	13.0	18.5	8.0	14.0	18.5	8.5	16.0	26.0	10.0	19.0	31.0	13.0	24.0	31.0			
.082	6.0	12.0	18.5	7.5	13.5	18.5	8.5	15.0	18.5	9.5	18.0	31.0	9.5	18.0	31.0	12.0	22.0	36.0			
.1	6.5	12.5	18.5	8.0	14.0	18.5	8.0	14.0	26.0	9.5	17.0	31.0	10.5	20.0	31.0	13.0	24.0	36.0			
.12	7.0	13.0	18.5	8.5	15.0	18.5	8.5	15.0	26.0	10.0	19.0	31.0	12.0	22.0	31.0	13.5	25.0	44.0			
.15	8.0	14.0	18.5	8.0	14.0	26.0	9.0	16.5	26.0	10.5	20.0	31.0	13.0	24.0	31.0	15.0	27.0	44.0			
.18	8.5	15.0	18.5	8.5	15.0	26.0	9.5	18.0	31.0	11.5	21.0	31.0	13.0	24.0	36.0	16.5	30.0	44.0			
.22	7.5	14.0	26.0	9.0	16.5	26.0	9.5	18.0	31.0	13.0	23.0	31.0	14.5	26.0	36.0	18.0	34.0	44.0			
.27	8.5	15.0	26.0	10.0	19.0	26.0	10.0	19.0	31.0	13.0	23.0	36.0	14.0	25.5	44.0						
.33	9.0	16.5	26.0	9.5	17.0	31.0	11.5	21.0	31.0	14.0	25.0	36.0	16.0	28.0	44.0						
.39	9.5	17.0	26.0	10.5	20.0	31.0	10.5	22.0	31.0	13.5	24.0	44.0	17.0	32.0	44.0						
.47	10.0	20.0	26.0	11.5	21.0	31.0	13.5	24.0	31.0	15.0	27.0	44.0	18.0	34.0	44.0						
.56	9.5	18.0	31.0	12.5	22.0	31.0	13.5	24.0	36.0												
.68	10.5	20.0	31.0	13.5	24.0	31.0	15.5	28.0	36.0												
.82	11.5	21.0	31.0	13.5	24.0	36.0	14.0	25.0	44.0												
1.0	13.0	24.0	31.0	15.0	27.0	36.0	16.0	28.0	44.0												

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659