

| Radiation | Type | Technology | Case |
|-----------|------|------------|--------------------------|
| Amber | 3 W | AllnGaP | Plastic lens, metal case |

| | |
|--|---|
| <p>Outline:</p> <p>H = 12.4 mm (± 0.5)</p> <p>D = 16 mm (± 0.5)</p> <p>Thread M10</p> <p>Pin 1 – cathode</p> <p>Pin 2 – anode</p> | <p>Description</p> <p>High-power amber LED in an aluminium case with thread socket, for easy handling and heat sink mounting</p> |
| | <p>Applications</p> <p>Illumination, remote control and optical communications, light barriers, measurement systems</p> |

Absolute Maximum Ratings

at $T_{amb} = 25^{\circ}\text{C}$, on heat sink ($S \geq 200 \text{ cm}^2$), unless otherwise specified

| Parameter | Test conditions | Symbol | Value | Unit |
|-----------------------------|---|-----------|-------------|--------------------|
| DC forward current | on heat sink | I_F | 1.0 | A |
| Peak forward current | $t_p \leq 10 \mu\text{s}$, $f \leq 500 \text{ Hz}$ | I_{FM} | 1,6 | A |
| Power dissipation | on heat sink | P | 3 | W |
| Operating temperature range | on heat sink | T_{amb} | -25 to +100 | $^{\circ}\text{C}$ |
| Storage temperature range | on heat sink | T_{stg} | -25 to +100 | $^{\circ}\text{C}$ |
| Junction temperature | on heat sink | T_j | 100 | $^{\circ}\text{C}$ |

Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test conditions | Symbol | Min | Typ | Max | Unit |
|----------------------------------|------------------------|------------|-----|-----|-----|------|
| Forward voltage | $I_F = 350 \text{ mA}$ | V_F | | 2.2 | 2.9 | V |
| Forward voltage* | $I_F = 700 \text{ mA}$ | V_F | | 2.4 | 3.2 | V |
| Switching time | $I_F = 350 \text{ mA}$ | t_r, t_f | | 65 | | ns |
| Reverse voltage | $I_R = 10 \mu\text{A}$ | V_R | 5 | | | |
| Thermal resistance junction-case | | R_{thJC} | | 10 | | K/W |

*only recommended on optimal heat sink

We reserve the right to make changes to improve technical design and may do so without further notice.
Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Optical Characteristics


at $T_{amb} = 25^{\circ}C$, on heat sink ($S \geq 200 \text{ cm}^2$), unless otherwise specified

| Parameter | Test conditions | Symbol | Min | Typ | Max | Unit |
|---------------------------|------------------------|-----------------------|-----|------|-----|-------|
| Radiant power | $I_F = 350 \text{ mA}$ | Φ_e | 20 | 25 | | mW |
| Radiant power* | $I_F = 700 \text{ mA}$ | Φ_e | | 40 | | mW |
| Radiant intensity | $I_F = 350 \text{ mA}$ | I_e | 170 | 330 | | mW/sr |
| Radiant intensity* | $I_F = 700 \text{ mA}$ | I_e | | 570 | | mW/sr |
| Luminous intensity | $I_F = 350 \text{ mA}$ | I_v | 70 | 140 | | cd |
| Luminous intensity* | $I_F = 700 \text{ mA}$ | I_v | | 230 | | cd |
| Peak wavelength | $I_F = 350 \text{ mA}$ | λ_p | 585 | 595 | 605 | nm |
| Spectral bandwidth at 50% | $I_F = 350 \text{ mA}$ | $\Delta\lambda_{0,5}$ | | 17,5 | | nm |
| Viewing angle | $I_F = 350 \text{ mA}$ | φ | | 17 | | deg |

*only recommended on optimal heat sink


Note: All measurements carried out with *EPIGAP* equipment, on blank aluminium heat sink, $S = 180 \text{ cm}^2$, passive cooling. Measurement results and curve characteristics obtained with other heat sinks may differ.

Typical wavelength shift vs. forward current
(rel. to $\lambda_p @ I_F = 350 \text{ mA}$)

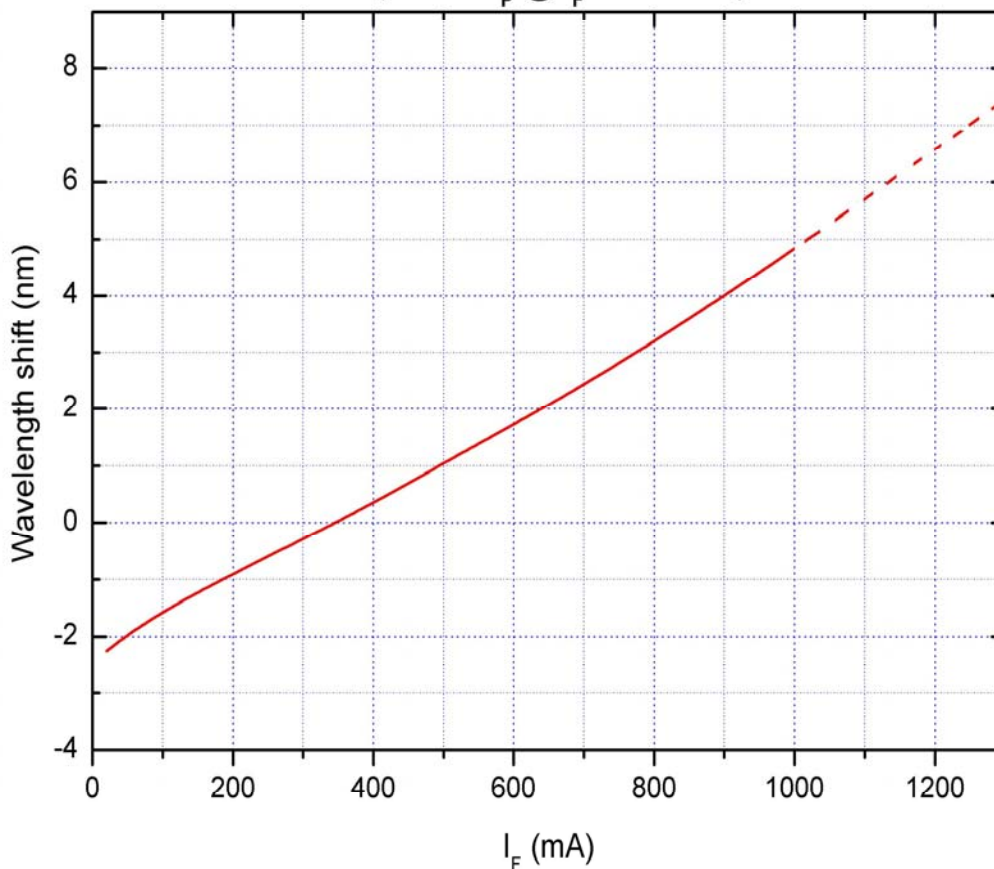


We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.


Radiant power vs. forward current (typical)
 normalized to Φ_E @ $I_F = 350$ mA

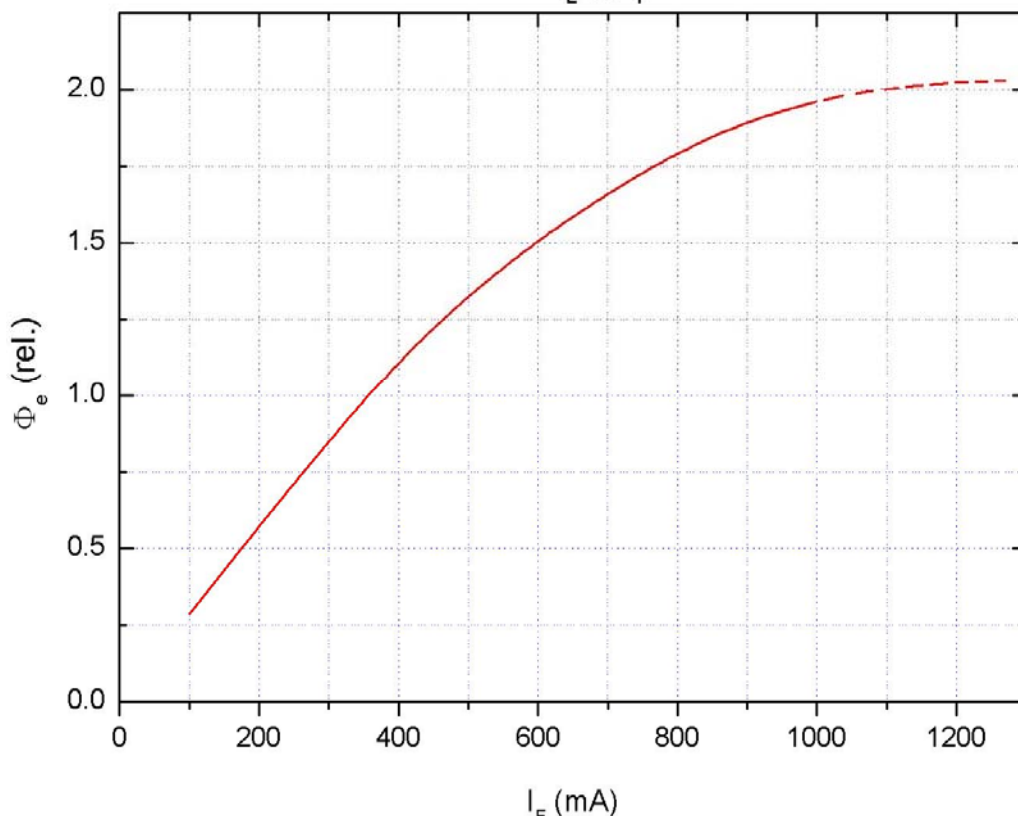

Forward voltage vs. forward current (typical)

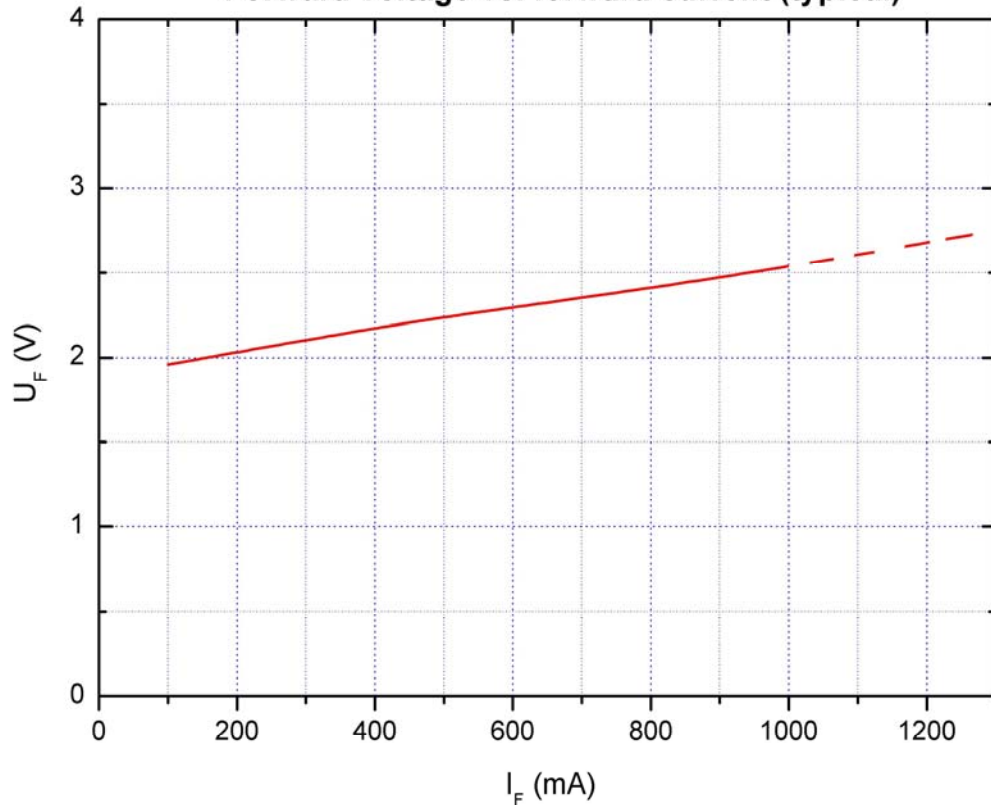

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

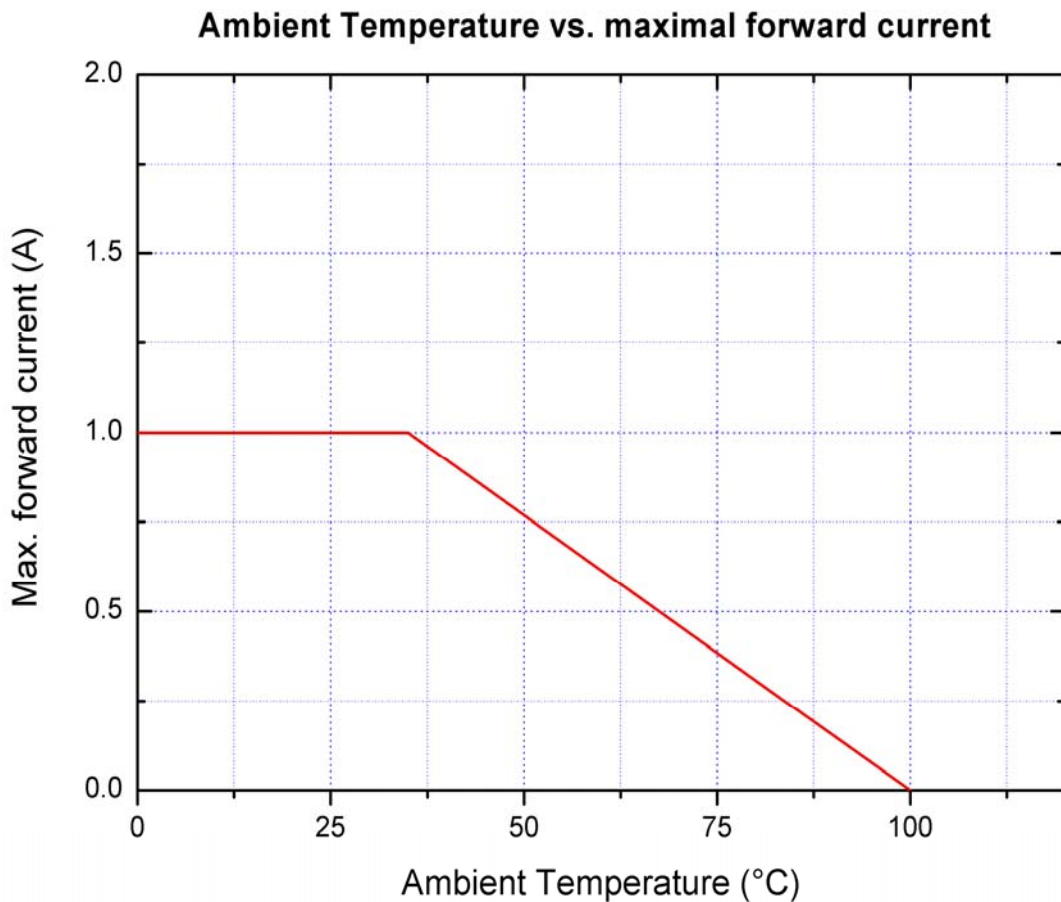

Remarks concerning optical radiation safety*

Up to nominal forward current (≤ 350 mA) and continuous operation, this LED may be classified as LED product *Class 2*, according to standard IEC 60825-1:A2. *Class 2* products emit in the visible region, damaging exposure is usually prevented through avert reactions including blink reflex. It can be expected that these reactions provide sufficient protection under reasonably predictable conditions. This also implicates a direct observation of the light beam by means of optical instruments.

If intended to operate at higher current, this product should be classified as LED product *Class 2M*, according to standard IEC 60825-1:A2. *Class 2M* products are safe to eyes and skin under normal conditions, including when users view the light beam directly. These products emit in the visible region and it is presumed that the human blink reflex will be sufficient to prevent damaging exposure, but if the beam is focused down, damaging levels of radiation may be reached. Therefore, users should not incorporate optics that could concentrate the output into the eyes.


*Note: Safety classification of an optical component mainly depends on the intended application and the way the component is being used. Furthermore, all statements made to classification are based on calculations and are only valid for this LED "as it is", and at continuous operation. Using pulsed current or altering the light beam with additional optics may lead to different safety classifications. Therefore these remarks should be taken as recommendation and guideline only.

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.


Handling precautions

To prevent damage to the LED during soldering and assembly, following precautions have to be taken into account.


a) The bending point of the lead frame should be located at least 2.5 mm away from the body.




b) While bending, the base of the lead frame has to be fixed with radio pliers or similar.



c) To ensure an adequate strain relief, the lead frames have to be firmly fixed during soldering.

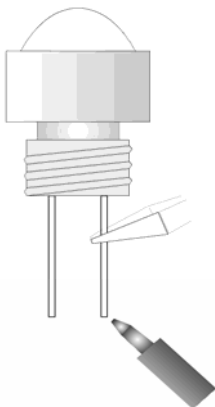

d) Avoid any torsion or tensile loading of the lead frames, especially when they have been heated after being soldered.



e) LEDs are static sensitive devices, so adequate handling precautions have to be taken, e.g. wearing grounding wrist straps.



ESD

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.