

# SEMiX101GD12E4s



SEMiX<sup>®</sup> 13

## Trench IGBT Modules

### SEMiX101GD12E4s

#### Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$  with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

#### Typical Applications\*

- AC inverter drives
- UPS
- Electronic Welding

#### Remarks

- Case temperature limited to  $T_C=125^{\circ}C$  max.
- Product reliability results are valid for  $T_j=150^{\circ}C$

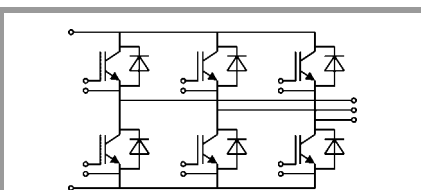

GD

Absolute Maximum Ratings				
Symbol	Conditions		Values	Unit
<b>IGBT</b>				
$V_{CES}$			1200	V
$I_C$	$T_j = 175^{\circ}C$	$T_c = 25^{\circ}C$	160	A
		$T_c = 80^{\circ}C$	123	A
$I_{Cnom}$			100	A
$I_{CRM}$	$I_{CRM} = 3 \times I_{Cnom}$		300	A
$V_{GES}$			-20 ... 20	V
$t_{psc}$	$V_{CC} = 800 V$	$T_j = 150^{\circ}C$	10	$\mu s$
	$V_{GE} \leq 20 V$			
	$V_{CES} \leq 1200 V$			
$T_j$			-40 ... 175	$^{\circ}C$
<b>Inverse diode</b>				
$I_F$	$T_j = 175^{\circ}C$	$T_c = 25^{\circ}C$	121	A
		$T_c = 80^{\circ}C$	91	A
$I_{Fnom}$			100	A
$I_{FRM}$	$I_{FRM} = 3 \times I_{Fnom}$		300	A
$I_{FSM}$	$t_p = 10 ms, \sin 180^{\circ}, T_j = 25^{\circ}C$		550	A
$T_j$			-40 ... 175	$^{\circ}C$
<b>Module</b>				
$I_{t(RMS)}$			600	A
$T_{stg}$			-40 ... 125	$^{\circ}C$
$V_{isol}$	AC sinus 50Hz, t = 1 min		4000	V

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
<b>IGBT</b>					
$V_{CE(sat)}$	$I_C = 100 A$ $V_{GE} = 15 V$ chipelevel	$T_j = 25^{\circ}C$	1.8	2.05	V
		$T_j = 150^{\circ}C$	2.2	2.4	V
$V_{CE0}$		$T_j = 25^{\circ}C$	0.8	0.9	V
		$T_j = 150^{\circ}C$	0.7	0.8	V
$r_{CE}$	$V_{GE} = 15 V$	$T_j = 25^{\circ}C$	10.0	11.5	m $\Omega$
		$T_j = 150^{\circ}C$	15.0	16.0	m $\Omega$
$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C = 3.8 mA$	5	5.8	6.5	V
$I_{CES}$	$V_{GE} = 0 V$ $V_{CE} = 1200 V$	$T_j = 25^{\circ}C$	0.1	0.3	mA
		$T_j = 150^{\circ}C$			mA
$C_{ies}$	$V_{CE} = 25 V$ $V_{GE} = 0 V$	$f = 1 MHz$	6.2		nF
$C_{oes}$		$f = 1 MHz$	0.41		nF
$C_{res}$		$f = 1 MHz$	0.34		nF
$Q_G$	$V_{GE} = - 8 V \dots + 15 V$		565		nC
$R_{Gint}$	$T_j = 25^{\circ}C$		7.50		$\Omega$
$t_{d(on)}$	$V_{CC} = 600 V$	$T_j = 150^{\circ}C$	187		ns
$t_r$	$I_C = 100 A$	$T_j = 150^{\circ}C$	35		ns
		$T_j = 150^{\circ}C$	10.8		mJ
$E_{on}$	$R_{G on} = 1 \Omega$	$T_j = 150^{\circ}C$	467		ns
$t_{d(off)}$	$R_{G off} = 1 \Omega$	$T_j = 150^{\circ}C$	94		ns
$t_f$	$di/dt_{on} = 3100 A/\mu s$ $di/dt_{off} = 1200 A/\mu s$	$T_j = 150^{\circ}C$	13.3		mJ
		$T_j = 150^{\circ}C$			
$E_{off}$					
$R_{th(j-c)}$	per IGBT			0.27	K/W



**SEMiX® 13**

## Trench IGBT Modules

### SEMiX101GD12E4s

#### Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$  with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532


#### Typical Applications\*

- AC inverter drives
- UPS
- Electronic Welding

#### Remarks

- Case temperature limited to  $T_C=125^\circ\text{C}$  max.
- Product reliability results are valid for  $T_j=150^\circ\text{C}$

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
<b>Inverse diode</b>						
$V_F = V_{EC}$	$I_F = 100\text{ A}$ $V_{GE} = 0\text{ V}$ chip	$T_j = 25^\circ\text{C}$		2.2	2.52	V
		$T_j = 150^\circ\text{C}$		2.1	2.5	V
$V_{F0}$		$T_j = 25^\circ\text{C}$	1.1	1.3	1.5	V
		$T_j = 150^\circ\text{C}$	0.7	0.9	1.1	V
$r_F$		$T_j = 25^\circ\text{C}$	8.0	9.0	10.2	m $\Omega$
		$T_j = 150^\circ\text{C}$	10.5	12.5	13.7	m $\Omega$
$I_{RRM}$	$I_F = 100\text{ A}$	$T_j = 150^\circ\text{C}$		95		A
$Q_{rr}$	$di/dt_{off} = 3000\text{ A}/\mu\text{s}$	$T_j = 150^\circ\text{C}$		16		$\mu\text{C}$
$E_{rr}$	$V_{GE} = -15\text{ V}$ $V_{CC} = 600\text{ V}$	$T_j = 150^\circ\text{C}$		6.5		mJ
$R_{th(j-c)}$	per diode				0.48	K/W
<b>Module</b>						
$L_{CE}$				20		nH
$R_{CC'+EE'}$	res., terminal-chip	$T_C = 25^\circ\text{C}$		0.7		m $\Omega$
		$T_C = 125^\circ\text{C}$		1		m $\Omega$
$R_{th(c-s)}$	per module			0.04		K/W
$M_s$	to heat sink (M5)		3		5	Nm
$M_t$		to terminals (M6)	2.5		5	Nm
						Nm
$w$					350	g
<b>Temperatur Sensor</b>						
$R_{100}$	$T_C=100^\circ\text{C}$ ( $R_{25}=5\text{ k}\Omega$ )			$493 \pm 5\%$		$\Omega$
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$ ; $T[\text{K}]$ ;			$3550$ $\pm 2\%$		K

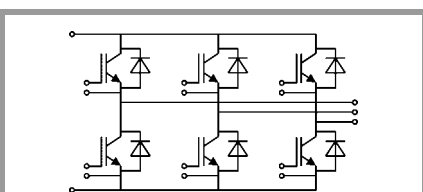

**GD**

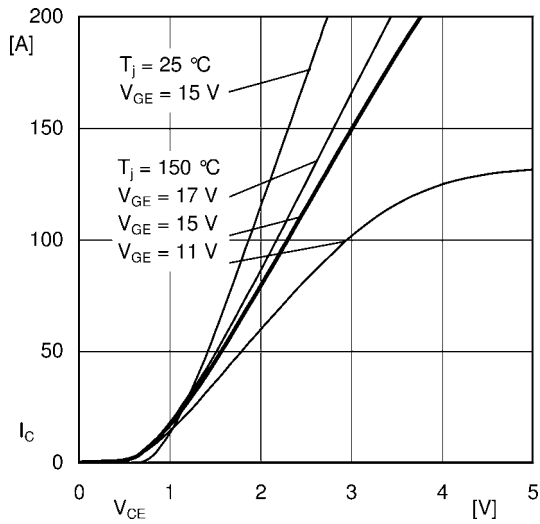


Fig. 1: Typ. output characteristic, inclusive  $R_{CC'+EE'}$

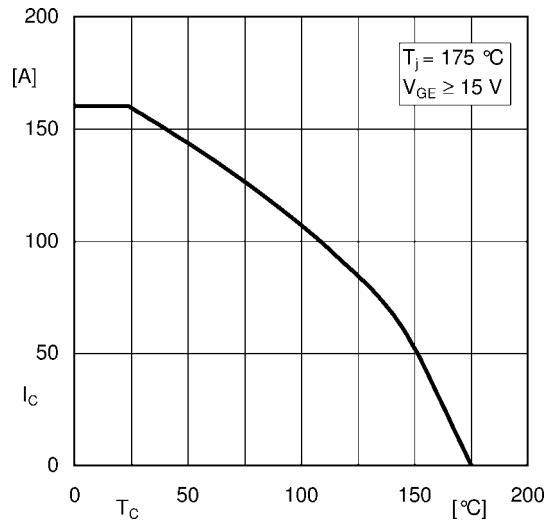


Fig. 2: Rated current vs. temperature  $I_C = f(T_C)$

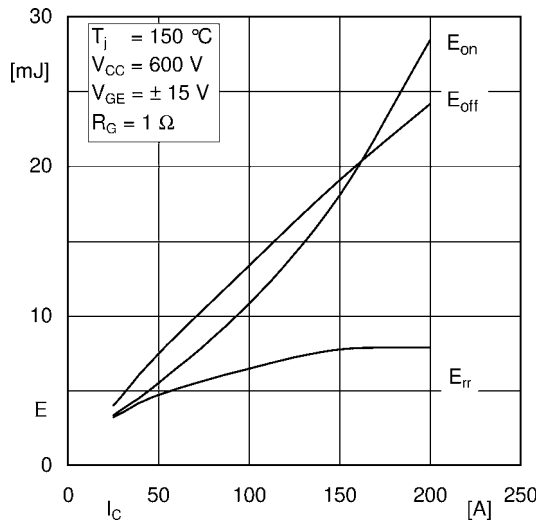


Fig. 3: Typ. turn-on /-off energy =  $f(I_C)$

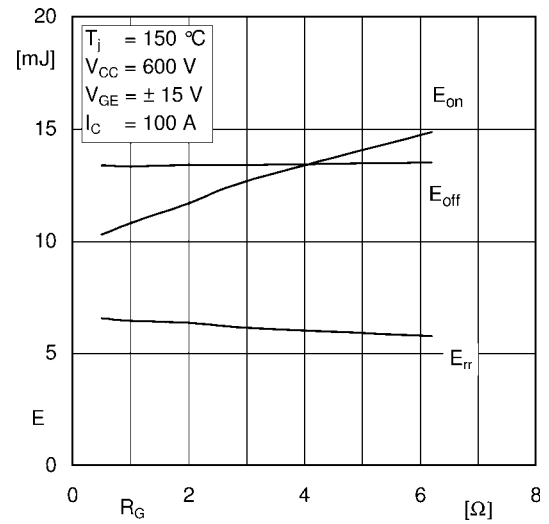


Fig. 4: Typ. turn-on /-off energy =  $f(R_G)$

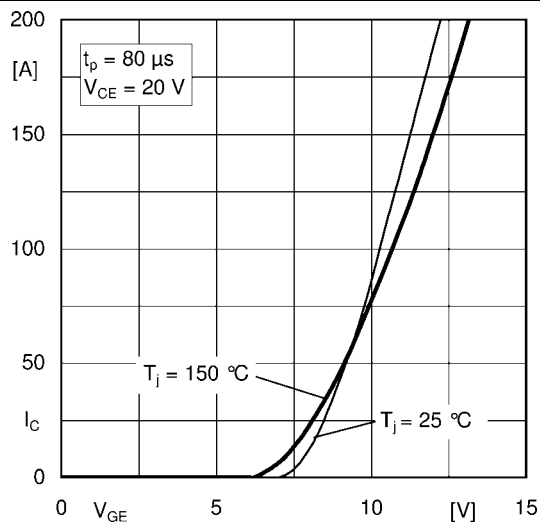


Fig. 5: Typ. transfer characteristic

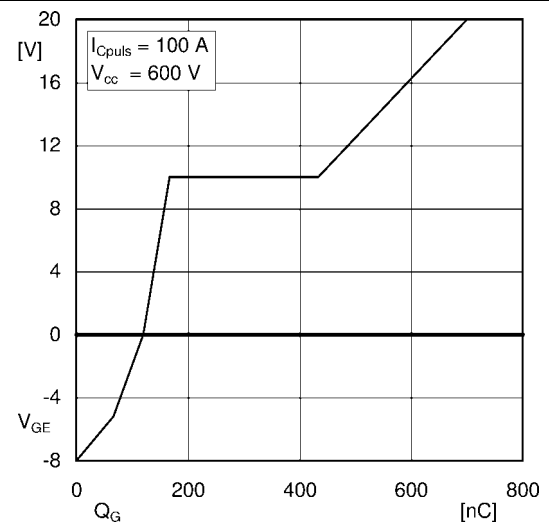


Fig. 6: Typ. gate charge characteristic

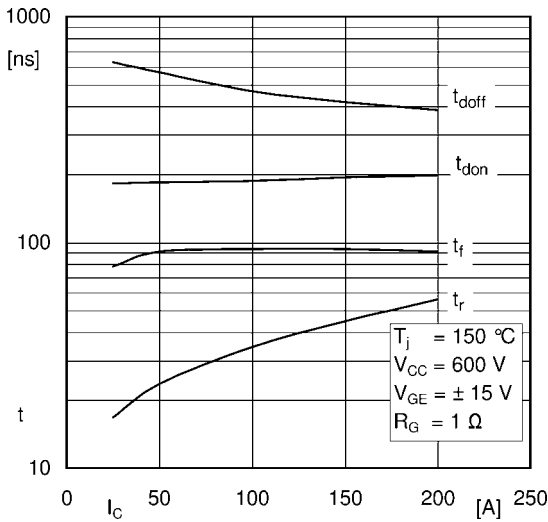


Fig. 7: Typ. switching times vs.  $I_C$

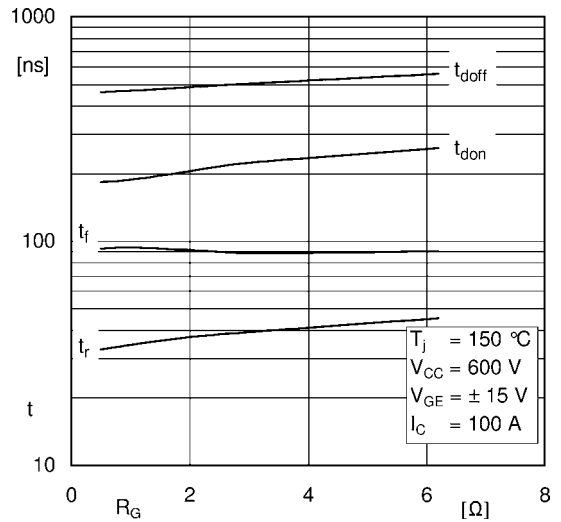


Fig. 8: Typ. switching times vs. gate resistor  $R_G$

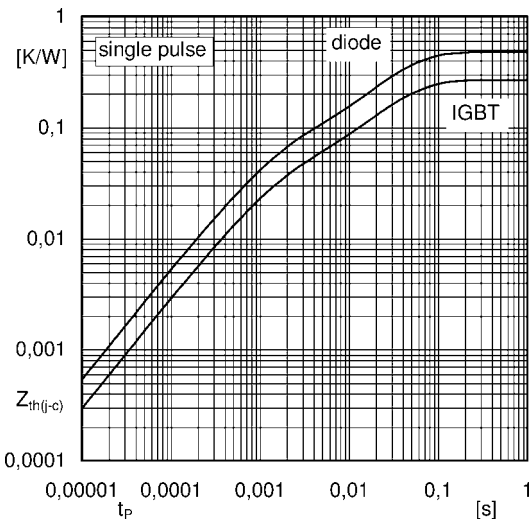


Fig. 9: Typ. transient thermal impedance

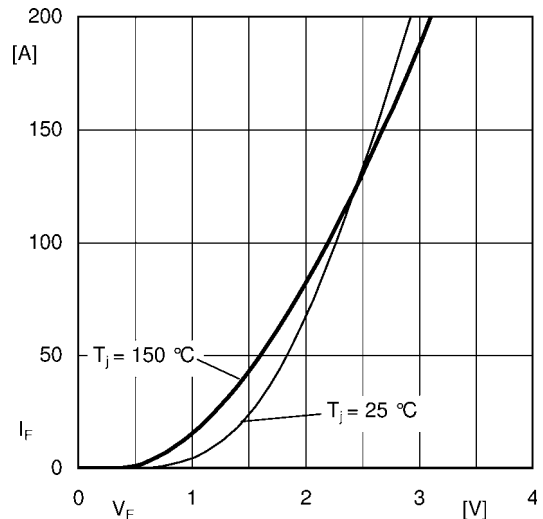


Fig. 10: Typ. CAL diode forward charact., incl.  $R_{CC+EE'}$

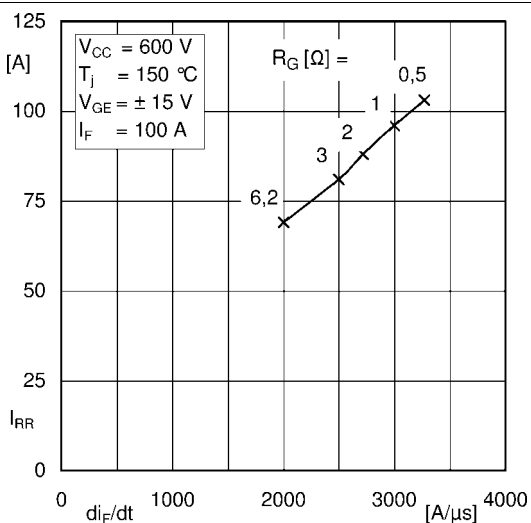


Fig. 11: Typ. CAL diode peak reverse recovery current




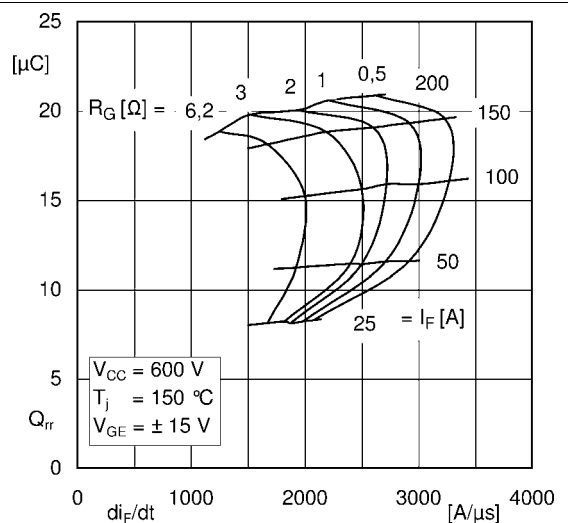


Fig. 12: Typ. CAL diode recovery charge

# SEMiX101GD12E4s

Case: SEMiX 13

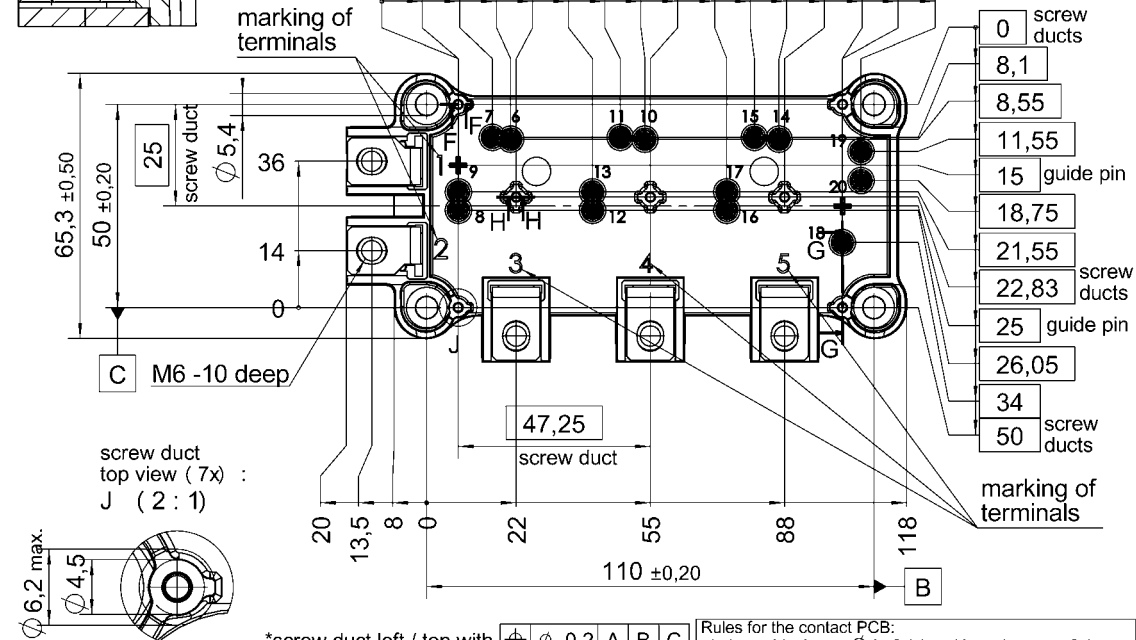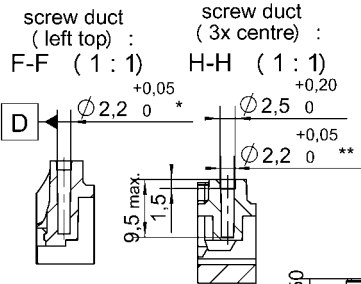

general tolerance:  
ISO 2768-mK  
ISO 8015


All measures in Z-direction valid when mounted to heat sink

\*screw duct left / top with  $\phi 0,2$  A B C

\*\*screw ducts / guide pins / spring ducts with  $\phi 0,2$  A D C

Rules for the contact PCB:  
- holes guidepins =  $\phi 4 \pm 0,1$  / position tolerance  $\pm 0,1$   
- holes for screws =  $\phi 2,9 \pm 0,1$  / position tolerance  $\pm 0,1$   
- spring contact pad =  $\phi 3,6 \pm 0,1$  / position tolerance  $\pm 0,1$

SEMiX 13

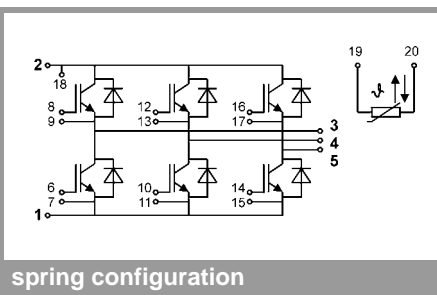

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.