




SWITCHING REGULATOR APPLICATIONS

■ FEATURES

- * High Speed.
- * High Breakdown Voltage ($V_{CBO}=1500V$).
- * High Reliability.

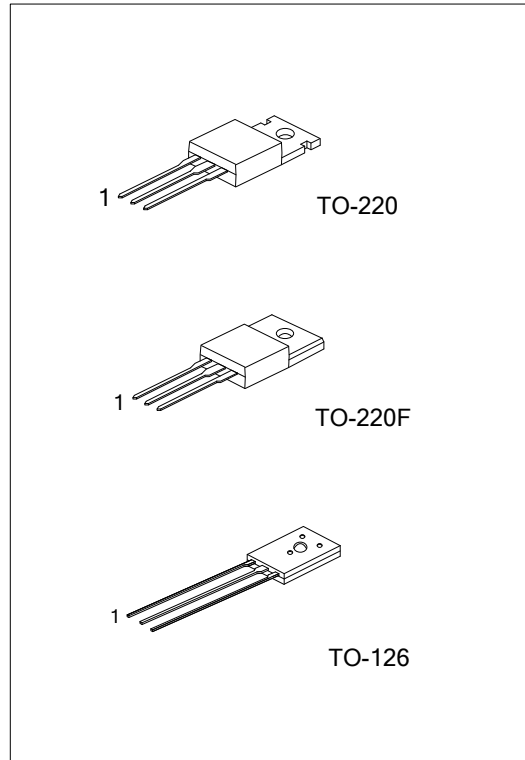

■ ORDERING INFORMATION

Ordering Number		Package	Pin Description			Packing
Lead Free	Halogen Free		1	2	3	
C6084L-TA3-T	C6084G-TA3-T	TO-220	B	C	E	Tube
C6084L-TF3-T	C6084G-TF3-T	TO-220F	B	C	E	Tube
C6084L-T60-K	C6084G-T60-K	TO-126	B	C	E	Bulk

<p>C6084L-TA3-T</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Lead Free</p>	<p>(1) T: Tube, K: Bulk</p> <p>(2) TA3: TO-220, TF3: TO-220F, T60: TO-126</p> <p>(3) G: Halogen Free, L: Lead Free Plating</p>
--	--

■ ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage	TO-220	V_{CB0}	1.5	KV
	TO-126		1.4	
Collector-Emitter Voltage		V_{CEO}	800	V
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current	TO-220	I_C	5	A
	TO-126		3	
	TO-220	I_{CP}	12	A
	TO-126		6	
Collector Dissipation	TO-220	P_C	1.75	W
	TO-126		1.25	W
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$


Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cutoff Current		I_{CBO}	$V_{CB}=800\text{V}, I_E=0\text{A}$			10	μA
Collector Cutoff Current		I_{CES}	$V_{CE}=1500\text{V}, R_{BE}=0\Omega$			1.0	mA
Collector Sustain Voltage		$V_{CEO(SUS)}$	$I_C=10\text{mA}, I_B=0\text{A}$	800			V
Emitter Cutoff Current		I_{EBO}	$V_{BE}=4\text{V}, I_C=0\text{A}$			1.0	mA
Collector-Emitter Saturation Voltage	TO-220	$V_{CE(SAT)}$	$I_C=2.7\text{A}, I_B=0.54\text{A}$			3	V
	TO-126		$I_C=1.4\text{A}, I_B=0.27\text{A}$			3	
Base-Emitter Saturation Voltage	TO-220	$V_{BE(SAT)}$	$I_C=2.7\text{A}, I_B=0.54\text{A}$			1.5	V
	TO-126		$I_C=1.4\text{A}, I_B=0.27\text{A}$			1.5	
DC Current Gain	TO-220/TO-126	h_{FE1}	$V_{CE}=5\text{V}, I_C=0.5\text{A}$	10			
	TO-220	h_{FE2}	$V_{CE}=5\text{V}, I_C=3\text{A}$	5		7	
	TO-126		$V_{CE}=5\text{V}, I_C=1.8\text{A}$	5		7	
Fall Time		T_F	$I_C=1.8\text{A}, I_{B1}=0.36\text{A}, I_{B2}=-0.72\text{A}$			0.2	μS

■ TEST CIRCUIT

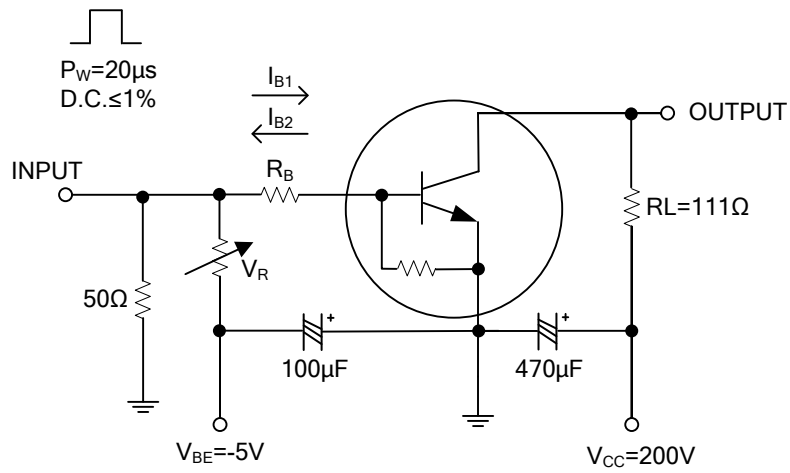

■ TYPICAL CHARACTERISTICS

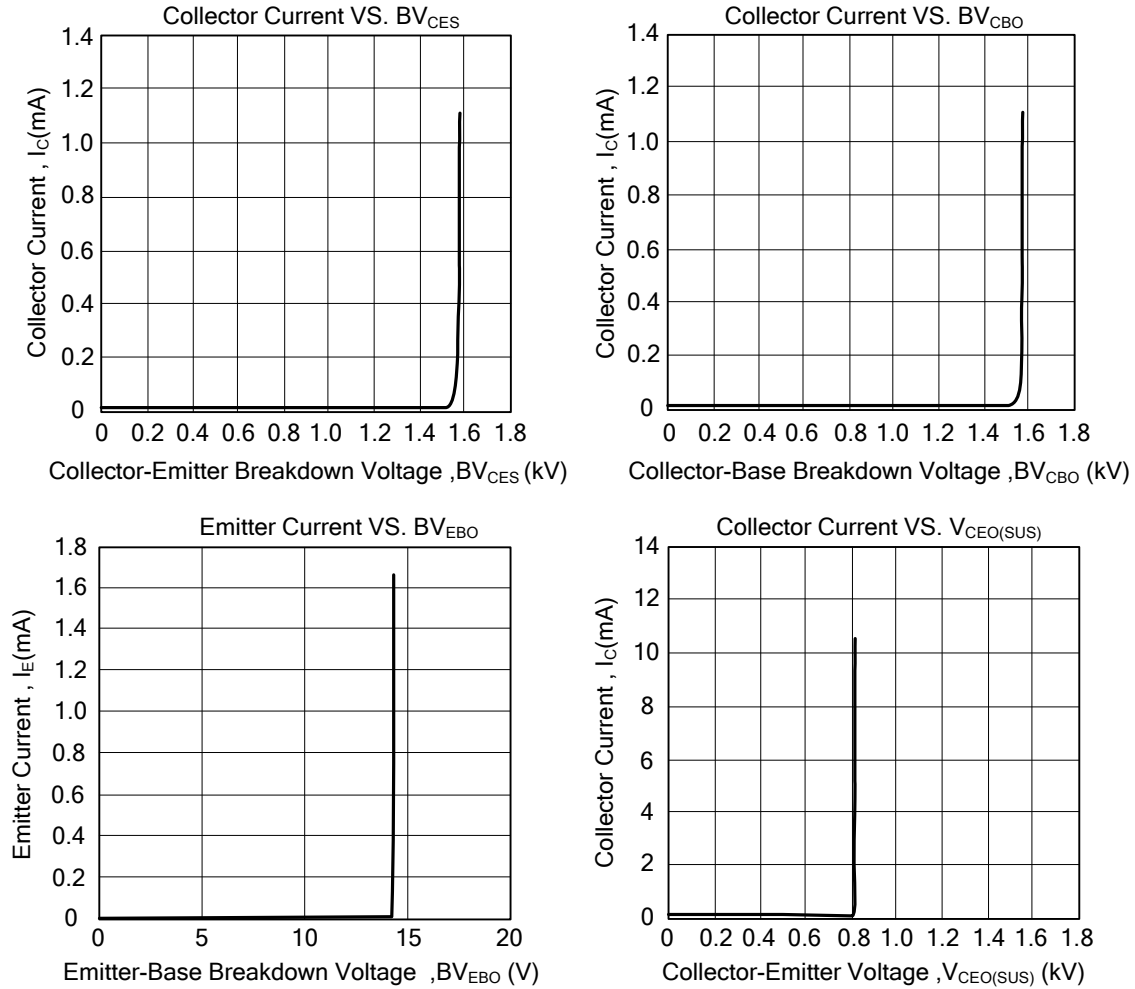

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.