

Ta=25°C

※:Type numbers are revised, refer to the attached list. (P60~62)

17

▼TAPED LED


Stanley's taped LEDs can be used in either type of insertion machine, high-density mounting and large parts insertion machines. The taped LEDs are available in flat boxes(Folded Tape type)or on reels

▼TYPE NO. OF LED LAMPS FOR TAPING(Examples)

Type No. (Example)	Lead Size (mm)	Height Between Bottom of Package and Center of hole H (mm)
38□8S	□0.4	21~24.5
50□1K	□0.5	21~24
50□4S	□0.5	20~24
50□4X	□0.5	20~24
50□7S	□0.5	20~24

●The suitable lamps are listed in the LED features section

▼TAPING FIGURE

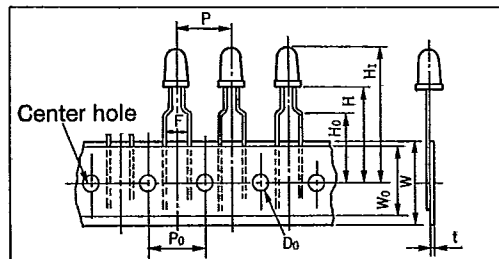

Items	(mm)	Straight Lead		Formed Lead	
		□0.4	□0.5	□0.4	□0.5
Pitch of Components	P	12.7	12.7	12.7	12.7
Pitch of Sprocket hole	Po	12.7	12.7	12.7	12.7
Lead to Lead Spacing	F	2.5	2.5	5.0	5.0
Height Between Bottom of Package and Center of hole	H	Refer to the above taping figure			
Stand-off Height	H0	—	—	16.0	16.0
Tape Width	W	18.0	18.0	18.0	18.0
Hold-Down Tape Width	W0	15.0	15.0	15.0	15.0
Sprocket Hole Diameter	φD0	4.0	4.0	4.0	4.0
Total Tape Thickness	t	0.58	0.58	0.58	0.58

●Other detailed specifications, conform to EIAJ-RC1008 standards

▼TAPING TYPES (Standard Specification Examples)

Folded Tape

Taping Type No.	Dimensions (mm)			Suitable LED(mm)		Quantity (in Each Box)	fig.
	L	H	W	Round	Rectangular		
J11	325	210	41	φ3	□3※	3,000pcs.	1
J22	325	280	42	φ5	□5※	2,500pcs.	

Tape on Reel





Taping Type No.	Dimensions (mm)			Suitable LED(mm)		Quantity (in Each Box)	fig.
	A	W	D	Round	Rectangular		
J55	360	52	30	φ3	□3※	2,200pcs.	2
J66	360	52	30	φ5	□5※	1,300pcs.	

●When ordering, specify type numbers(Ex:BR3908S-J11)

※Length of rectangular package


●J55 /J66 : possible to specify anode first or cathode first.

▼PACKAGING DIMENSIONS Unit:mm

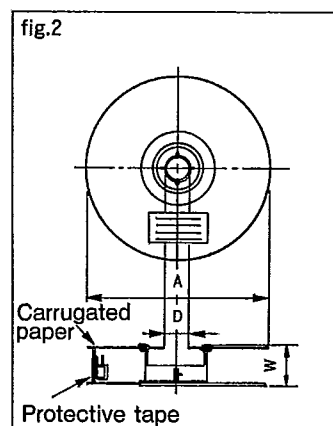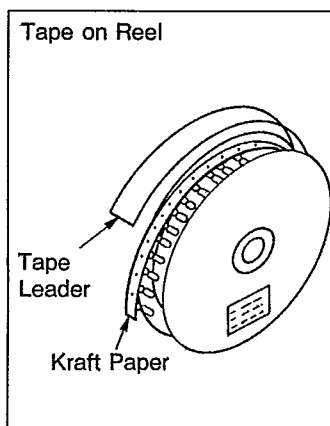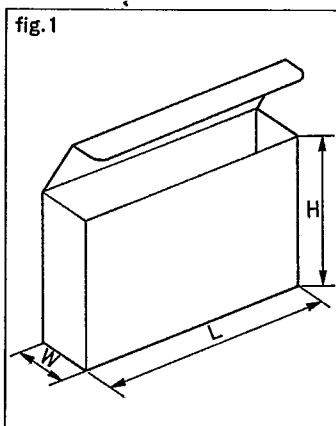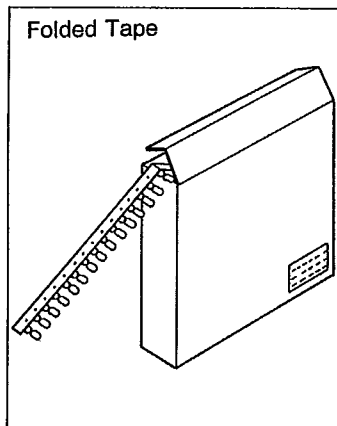


▼FORMED-LEAD LED

	Radial Type	Type No. 57□4S-OO	Dimensions	fig.
		B1	15.0±0.5	3
		B2	22.5±0.5	
		B4	20.0±0.5	
		B6	17.5±0.5	

	Axial Type	Type No. 22□2S-OO	Dimensions	fig.
		B1	6.5±0.3	4
		B2	9.0±0.5	

	L Type	Type No. 57□4S-OO	Dimensions	fig.
		B3	11.8±0.5	5

	L Type	Type No. 53□9K-OO	Dimensions	fig.
		B36	14.3±0.5	6

●The above dimension are examples of standard types. Consult us for custom specifications

▼PACKAGE DIMENSIONS Unit:mm

