


ES1000

Clear, high-shrink-ratio, adhesive-lined, semirigid polyolefin tubing

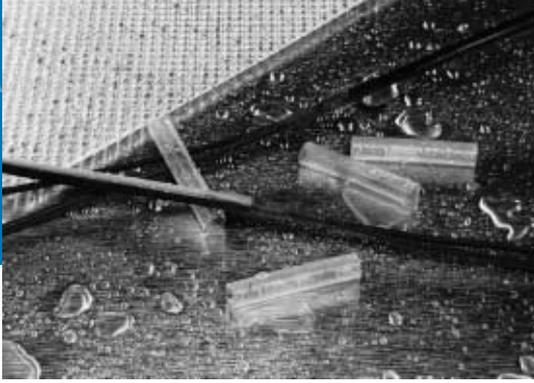

Applications

Specially designed for environmental sealing and electrical insulation of wire splices, terminations, and components where see-through inspection is required.

Operating temperature range

-40°C to 130°C

Features and benefits

- 4:1 shrink ratio allows a few sizes to cover a wide range of splice and component diameters.
- Mechanically tough tubing provides strain relief and abrasion protection of wire splices, terminals and other components.
- Thick adhesive liner forms an effective barrier against fluids and moisture and performs well at an extended temperature range.

Installation

Minimum shrink temperature: 110°C

Minimum full recovery temperature: 135°C

Available in:	Americas	Europe	Asia Pacific
	■		■

Specifications/approvals		
Series		Raychem
ES1000	UL E85381 600 V, 125°C	RT-1113

Fax-on-demand	Fax ID	Description
US only (800) 260-9099	2550	Data sheet
Outside US (650) 257-2301	2551	RT-1113

Visit our website at www.tycoelectronics.com

Product dimensions (mm/in)

Part Number	Inside diameter (including core)		Recovered wall thickness*		
	Minimum expanded as supplied	Maximum recovered after heating	Minimum total wall after heating	Minimum jacket wall after heating	Minimum adhesive wall after heating
ES1000-No.1	5.72 (0.225)	1.27 (0.050)	1.20 (0.047)	0.64 (0.025)	0.56 (0.022)
ES1000-No.2	7.44 (0.293)	1.65 (0.065)	1.52 (0.060)	0.76 (0.030)	0.76 (0.030)
ES1000-No.3	10.85 (0.427)	2.41 (0.095)	1.91 (0.075)	0.89 (0.035)	1.02 (0.040)
ES1000-No.4	17.78 (0.700)	4.45 (0.175)	2.41 (0.095)	1.04 (0.041)	1.37 (0.054)

*Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering information

Color	Standard	Clear (-X)
Size selection	Always order the largest size that will shrink snugly over the component to be covered.	
Standard packaging	Cut pieces.	
Marking	Tubing will be printed with its numbered size (such as ES-1, ES-2, ES-3, or ES-4).	
Ordering description	Specify product name, numbered size, color, and cut length (for example, ES1000-No. 2-X-50mm).	