


1 - Cathode
2 - Anode
Back of Case - Cathode



**ADVANCED
POWER
TECHNOLOGY®**
APT60S20B 200V 60A

HIGH VOLTAGE SCHOTTKY DIODE

PRODUCT APPLICATIONS

- Parallel Diode
 - Switchmode Power Supply
 - Inverters
- Free Wheeling Diode
 - Motor Controllers
 - Converters
- Snubber Diode
- Uninterruptible Power Supply (UPS)
- 48 Volt Output Rectifiers
- High Speed Rectifiers

PRODUCT FEATURES

- Ultrafast Recovery Times
- Soft Recovery Characteristics
- Popular TO-247 Package
- Low Forward Voltage
- High Blocking Voltage
- Low Leakage Current

PRODUCT BENEFITS

- Low Losses
- Low Noise Switching
- Cooler Operation
- Higher Reliability Systems
- Increased System Power Density

MAXIMUM RATINGS

All Ratings: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT60S20B	UNIT
V_R	Maximum D.C. Reverse Voltage	200	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_F(\text{AV})$	Maximum Average Forward Current ($T_C = 125^\circ\text{C}$, Duty Cycle = 0.5)	60	Amps
$I_F(\text{RMS})$	RMS Forward Current (Max. Current Limited by Lead Temperature)	100	
I_{FSM}	Non-Repetitive Forward Surge Current ($T_J = 45^\circ\text{C}$, 8.3ms)	TBD	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Lead Temperature: 0.063" from Case for 10 Sec.	300	
E_{AVL}	Avalanche Energy (2A, 30mH)	60	mJ

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
V_F	Maximum Forward Voltage		$I_F = 60\text{A}$	0.83	Volts
			$I_F = 120\text{A}$	0.96	
			$I_F = 60\text{A}, T_J = 150^\circ\text{C}$	0.80	
I_{RM}	Maximum Reverse Leakage Current		$V_R = V_R \text{ Rated}$	1	mA
			$V_R = V_R \text{ Rated}, T_J = 125^\circ\text{C}$	25	
C_T	Junction Capacitance, $V_R = 100\text{V}$		285		pF
L_S	Series Inductance (Lead to Lead 5mm from Base)		10		nH

DYNAMIC CHARACTERISTICS

APT60S20B


Symbol	Characteristic	MIN	TYP	MAX	UNIT
t_{rr1}	Reverse Recovery Time, $I_F = 1.0A$, $di_F/dt = -15A/\mu s$, $V_R = 30V$, $T_J = 25^\circ C$		TBD	TBD	ns
t_{rr2}	Reverse Recovery Time	$T_J = 25^\circ C$	65		
t_{rr3}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	94		
t_{fr1}	Forward Recovery Time	$T_J = 25^\circ C$	TBD		
t_{fr2}	$I_F = 60A$, $di_F/dt = 100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	TBD		
I_{RRM1}	Reverse Recovery Current	$T_J = 25^\circ C$	3.6		Amps
I_{RRM2}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	5.5		
Q_{rr1}	Recovery Charge	$T_J = 25^\circ C$	140		nC
Q_{rr2}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	305		
V_{fr1}	Forward Recovery Voltage	$T_J = 25^\circ C$	TBD		Volts
V_{fr2}	$I_F = 60A$, $di_F/dt = 100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	TBD		
diM/dt	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	TBD		A/ μs
	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	TBD		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			0.4	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			40	
W_T	Package Weight		0.22		oz
			6.1		gm
Torque	Maximum Mounting Torque (Screw Type = 6-32 or 3mm Machine)			10	lb•in
				1.1	N•m

APT Reserves the right to change, without notice, the specifications and information contained herein.

TO-247 Package Outline

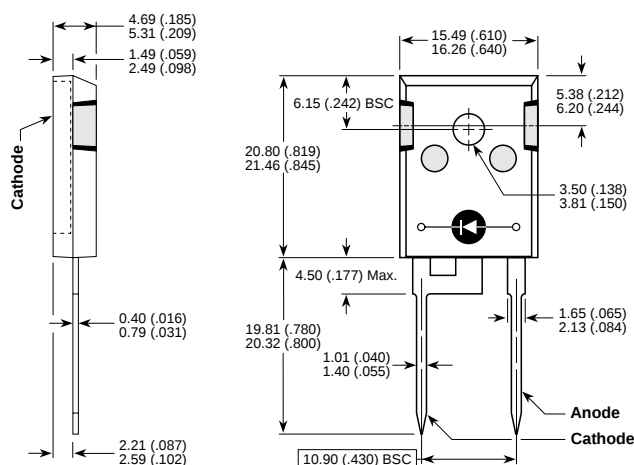

Dimensions in Millimeters and (Inches)

APT's devices are covered by one or more of the following U.S.patents:

4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336
5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058