

---

# HM62W9127HB Series

1 M High Speed SRAM (128-kword × 9-bit)

# HITACHI

ADE-203-792A (Z)

Preliminary

Rev. 0.1

Nov. 1997

---

## Description

The HM62W9127HB is an asynchronous 3.3 V operation high speed static RAM organized as 131072-word × 9-bit. It realize high speed access time (25/30 ns) with employing 0.8 μm shrink CMOS process and high speed circuit designing technology. It is most appropriate for the application which requires high speed, high density memory and wide bit width configuration, such as cache and buffer memory in system. The HM62W9127HB is packaged in 400-mil 36-pin SOJ for high density surface mounting.

## Features

- Single 3.3 V supply: 3.3 V ± 0.3 V
- Access time 25/30 ns (max)
- Completely static memory
  - No clock or timing strobe required
- Equal access and cycle times
- Directly TTL compatible
  - All inputs and outputs
- 400-mil 36-pin SOJ package
- Center  $V_{CC}$  and  $V_{SS}$  type pinout


## Ordering Information

Type No.	Access time	Package
HM62W9127HBJP-25	25 ns	400-mil 36-pin plastic SOJ (CP-36D)
HM62W9127HBJP-30	30 ns	
HM62W9127HBLJP-25	25 ns	
HM62W9127HBLJP-30	30 ns	

---

# HM62W9127HB Series


## Pin Arrangement

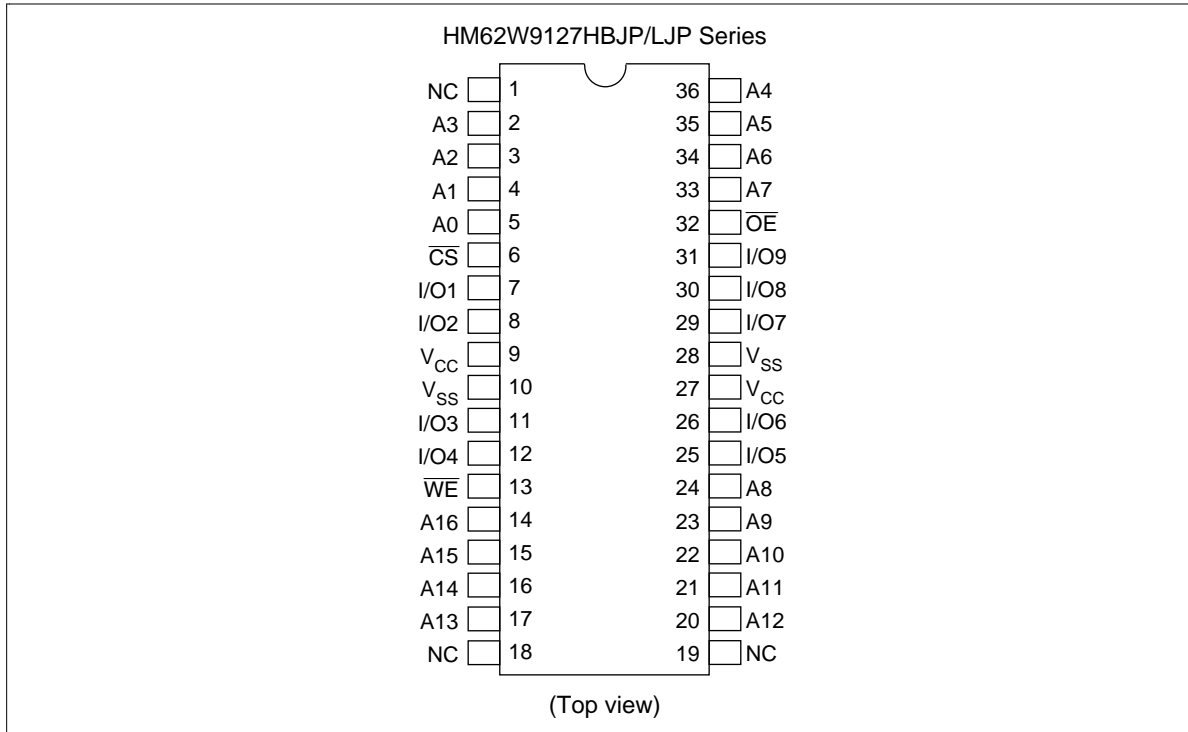

## Pin Description

Pin name	Function
A0 to A16	Address input
I/O1 to I/O9	Data input/output
$\overline{CS}$	Chip select
$\overline{OE}$	Output enable
$\overline{WE}$	Write enable
$V_{CC}$	Power supply
$V_{SS}$	Ground
NC	No connection

Block Diagram

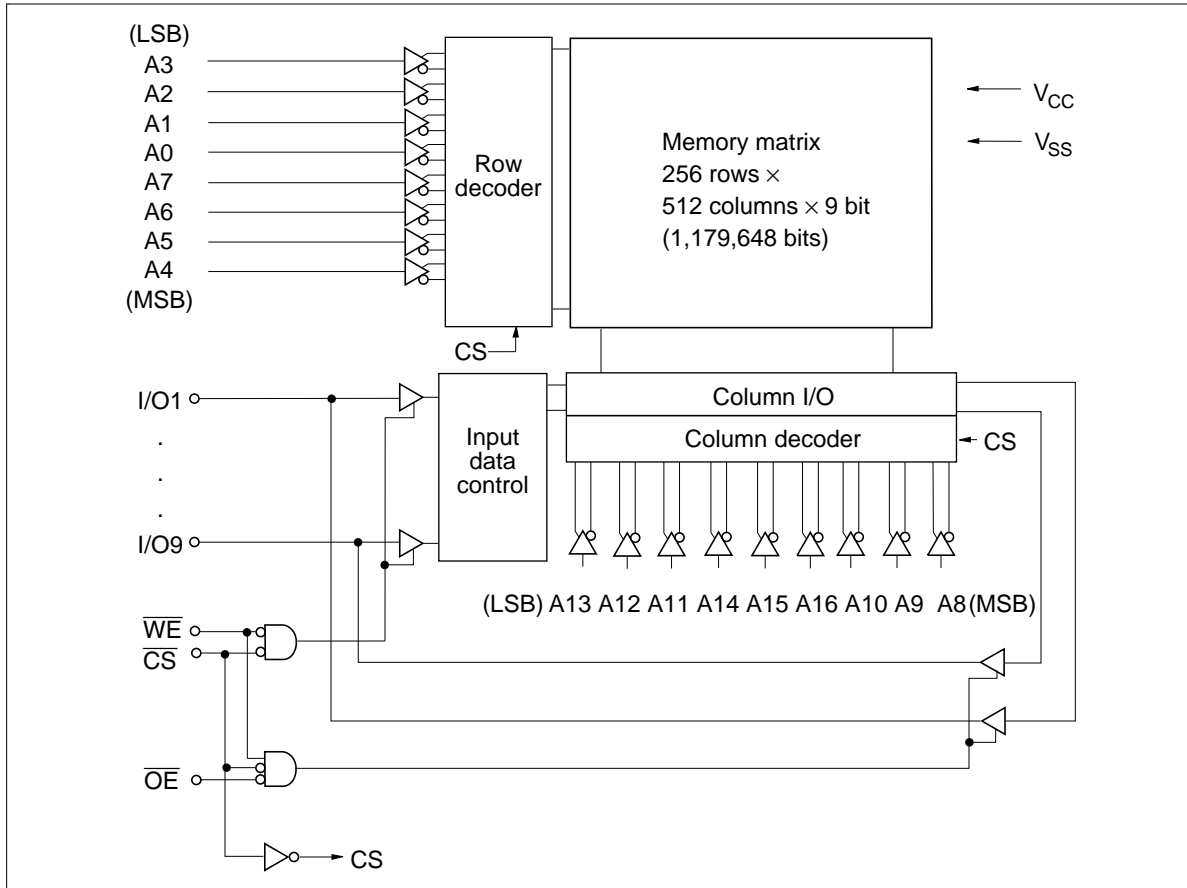

Function Table

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	Mode	$V_{CC}$ current	I/O	Ref. cycle
H	x	x	Standby	$I_{SB}, I_{SB1}$	High-Z	—
L	H	H	Output disable	$I_{CC}$	High-Z	—
L	L	H	Read	$I_{CC}$	Dout	Read cycle (1) to (3)
L	H	L	Write	$I_{CC}$	Din	Write cycle (1)
L	L	L	Write	$I_{CC}$	Din	Write cycle (2)

Note: x: H or L

---

## HM62W9127HB Series

---

### Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply voltage relative to $V_{SS}$	$V_{CC}$	-0.5 to +4.6	V
Voltage on any pin relative to $V_{SS}$	$V_T$	-0.5* <sup>1</sup> to $V_{CC}+0.5$ * <sup>2</sup>	V
Power dissipation	$P_T$	1.0	W
Operating temperature	$T_{opr}$	0 to +70	°C
Storage temperature	$T_{stg}$	-55 to +125	°C
Storage temperature under bias	$T_{bias}$	-10 to +85	°C

- Notes: 1.  $V_T$  min = -2.5 V for pulse width (under shoot)  $\leq$  10 ns  
2. Maximum voltage: 4.6 V.

### Recommended DC Operating Conditions ( $T_a = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	$V_{CC}$ * <sup>2</sup>	3.0	3.3	3.6	V
	$V_{SS}$ * <sup>3</sup>	0	0	0	V
Input voltage	$V_{IH}$	2.0	—	$V_{CC} + 0.3$	V
	$V_{IL}$	-0.3* <sup>1</sup>	—	0.8	V

- Notes: 1.  $V_{IL}$  min = -2.0 V for pulse width (under shoot)  $\leq$  10 ns  
2. The supply voltage with all  $V_{CC}$  pins must be on the same level.  
3. The supply voltage with all  $V_{SS}$  pins must be on the same level.

## HM62W9127HB Series

### DC Characteristics (Ta = 0 to +70°C, V<sub>CC</sub> = 3.3 V ± 0.3 V, V<sub>SS</sub> = 0V)

Parameter	Symbol	Min	Typ* <sup>1</sup>	Max	Unit	Test conditions	
Input leakage current	I <sub>LI</sub>	—	—	2	μA	V <sub>in</sub> = V <sub>SS</sub> to V <sub>CC</sub>	
Output leakage current	I <sub>LO</sub>	—	—	2	μA	V <sub>in</sub> = V <sub>SS</sub> to V <sub>CC</sub>	
Operation power supply current	25 ns cycle I <sub>CC</sub>	—	—	80	mA	$\overline{CS} = V_{IL}$ , I <sub>out</sub> = 0 mA Other inputs = V <sub>IH</sub> /V <sub>IL</sub>	
	30 ns cycle I <sub>CC</sub>	—	—	70			
Standby power supply current	25 ns cycle I <sub>SB</sub>	—	—	40	mA	$\overline{CS} = V_{IH}$ , Other inputs = V <sub>IH</sub> /V <sub>IL</sub>	
	30 ns cycle I <sub>SB</sub>	—	—	35			
	I <sub>SB1</sub>	—	—	1	mA	V <sub>CC</sub> ≥ $\overline{CS}$ ≥ V <sub>CC</sub> - 0.2 V, (1) 0 V ≤ V <sub>in</sub> ≤ 0.2 V or (2) V <sub>CC</sub> ≥ V <sub>in</sub> ≥ V <sub>CC</sub> - 0.2 V	
		—* <sup>2</sup>	—* <sup>2</sup>	0.15* <sup>2</sup>			
Output voltage	V <sub>OL</sub>	—	—	0.2	V	I <sub>OL</sub> = 0.1 mA	
		—	—	0.4		I <sub>OL</sub> = 2 mA	
	V <sub>OH</sub>	V <sub>CC</sub> - 0.2	—	—	—	V	I <sub>OH</sub> = -0.1 mA
		2.4	—	—	—	V	I <sub>OH</sub> = -2 mA

Notes: 1. Typical values are at V<sub>CC</sub> = 3.3 V, Ta = +25°C and not guaranteed.

2. This characteristics is guaranteed only for L-version.

### Capacitance (Ta = +25°C, f = 1.0 MHz)

Parameter	Symbol	Min	Typ	Max	Unit	Test conditions
Input capacitance* <sup>1</sup>	C <sub>in</sub>	—	—	6	pF	V <sub>in</sub> = 0 V
Input/output capacitance* <sup>1</sup>	C <sub>I/O</sub>	—	—	8	pF	V <sub>I/O</sub> = 0 V


Note: 1. This parameter is sampled and not 100% tested.

## HM62W9127HB Series

**AC Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ , unless otherwise noted.)

### Test Conditions

- Input pulse levels: 2.4 V/0.4 V
- Input rise and fall time: 3 ns
- Input and output timing reference levels: 1.4V
- Output load: See figures (Including scope and jig)

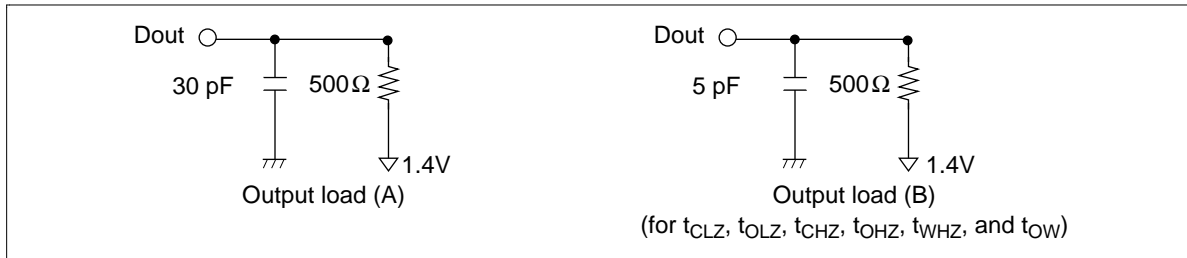

### Read Cycle

Parameter	Symbol	HM62W9127HB-25		HM62W9127HB-30		Unit	Notes
		Min	Max	Min	Max		
Read cycle time	$t_{RC}$	25	—	30	—	ns	
Address access time	$t_{AA}$	—	25	—	30	ns	
Chip select access time	$t_{ACS}$	—	25	—	30	ns	
Output enable to output valid	$t_{OE}$	—	15	—	15	ns	
Output hold from address change	$t_{OH}$	5	—	5	—	ns	
Chip select to output in low-Z	$t_{CLZ}$	5	—	5	—	ns	1
Output enable to output in low-Z	$t_{OLZ}$	1	—	1	—	ns	1
Chip deselect to output in high-Z	$t_{CHZ}$	—	12	—	12	ns	1
Output disable to output in high-Z	$t_{OHZ}$	—	12	—	12	ns	1

## HM62W9127HB Series

### Write Cycle


Parameter	Symbol	HM62W9127HB-25		HM62W9127HB-30		Unit	Notes
		Min	Max	Min	Max		
Write cycle time	$t_{WC}$	25	—	30	—	ns	
Address valid to end of write	$t_{AW}$	20	—	20	—	ns	
Chip select to end of write	$t_{CW}$	20	—	20	—	ns	9
Write pulse width	$t_{WP}$	20	—	20	—	ns	8
Address setup time	$t_{AS}$	0	—	0	—	ns	6
Write recovery time	$t_{WR}$	0	—	0	—	ns	7
Data to write time overlap	$t_{DW}$	15	—	15	—	ns	
Data hold from write time	$t_{DH}$	0	—	0	—	ns	
Write disable to output in low-Z	$t_{OW}$	5	—	5	—	ns	1
Output disable to output in high-Z	$t_{OHZ}$	—	12	—	12	ns	1
Write enable to output in high-Z	$t_{WHZ}$	—	12	—	12	ns	1

- Note:
1. Transition is measured  $\pm 200$  mV from steady voltage with Load (B). This parameter is sampled and not 100% tested.
  2. Address should be valid prior to or coincident with  $\overline{CS}$  transition low.
  3.  $\overline{WE}$  and/or  $\overline{CS}$  must be high during address transition time.
  4. If  $\overline{CS}$  and  $\overline{OE}$  are low during this period, I/O pins are in the output state. Then, the data input signals of opposite phase to the outputs must not be applied to them.
  5. If the  $\overline{CS}$  low transition occurs simultaneously with the  $\overline{WE}$  low transition or after the  $\overline{WE}$  transition, output remains a high impedance state.
  6.  $t_{AS}$  is measured from the latest address transition to the later of  $\overline{CS}$  or  $\overline{WE}$  going low.
  7.  $t_{WR}$  is measured from the earlier of  $\overline{CS}$  or  $\overline{WE}$  going high to the first address transition.
  8. A write occurs during the overlap of a low  $\overline{CS}$  and a low  $\overline{WE}$ . A write begins at the latest transition among  $\overline{CS}$  going low and  $\overline{WE}$  going low. A write ends at the earliest transition among  $\overline{CS}$  going high and  $\overline{WE}$  going high.  $t_{WP}$  is measured from the beginning of write to the end of write.
  9.  $t_{CW}$  is measured from the later of  $\overline{CS}$  going low to the end of write.


# HM62W9127HB Series

## Timing Waveforms

Read Timing Waveform (1) ( $\overline{WE} = V_{IH}$ )

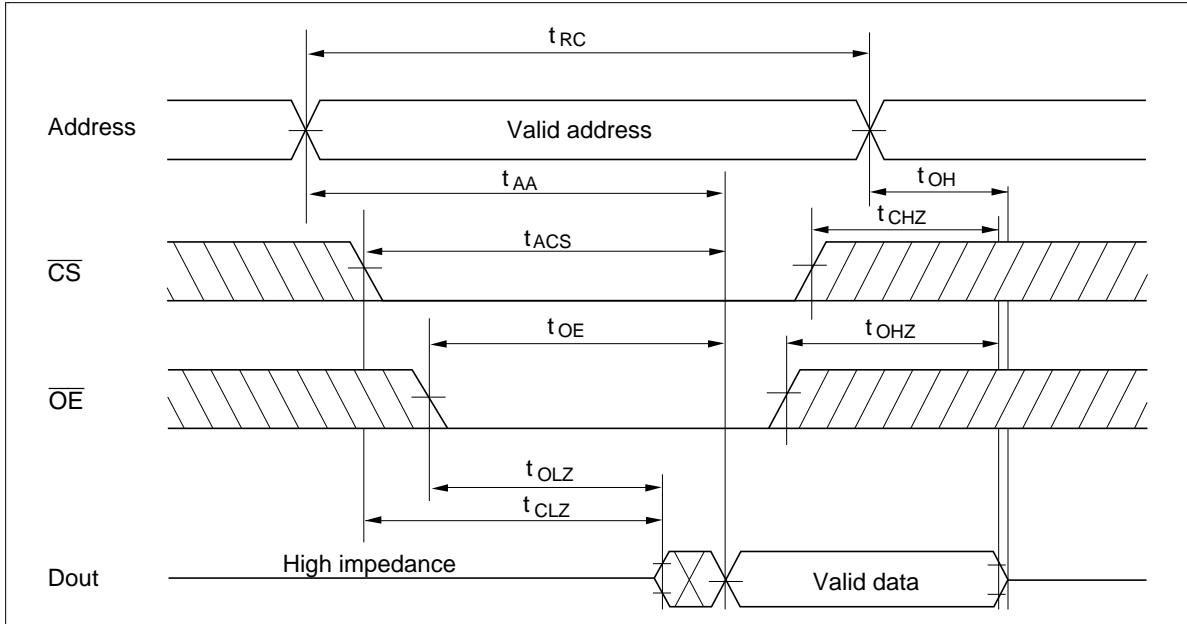


Read Timing Waveform (2) ( $\overline{WE} = V_{IH}, \overline{CS} = V_{IL}, \overline{OE} = V_{IL}$ )

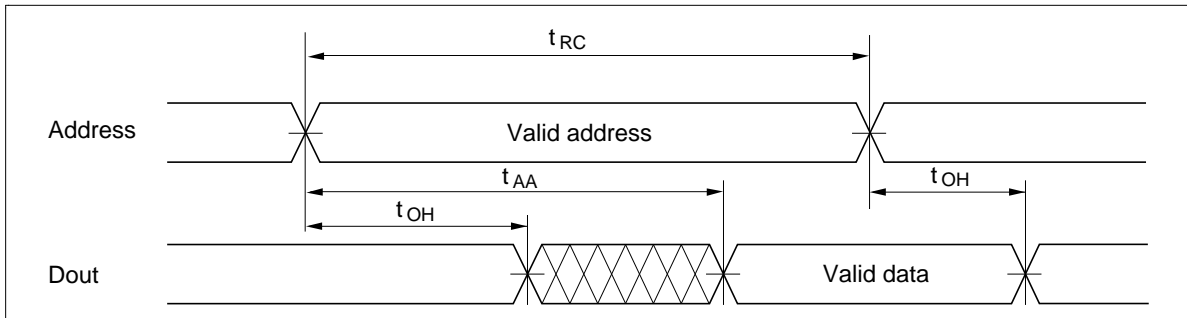


## HM62W9127HB Series

**Read Timing Waveform (3)** ( $\overline{WE} = V_{IH}, \overline{CS} = V_{IL}, \overline{OE} = V_{IL}$ )\*2

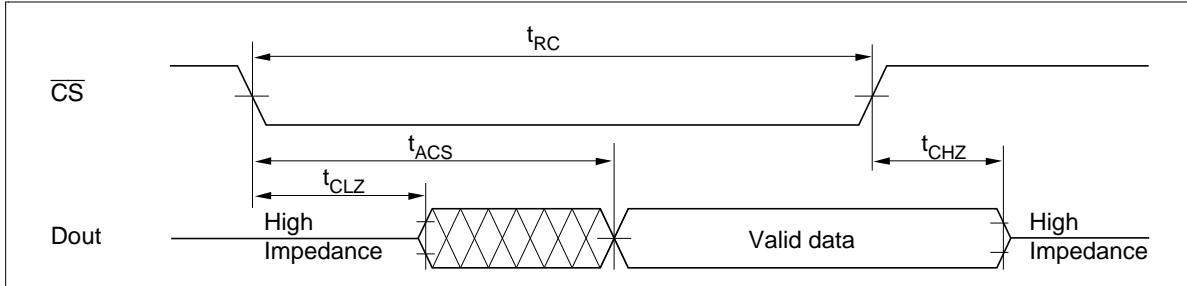


**Write Timing Waveform (1)** ( $\overline{WE}$  Controlled)

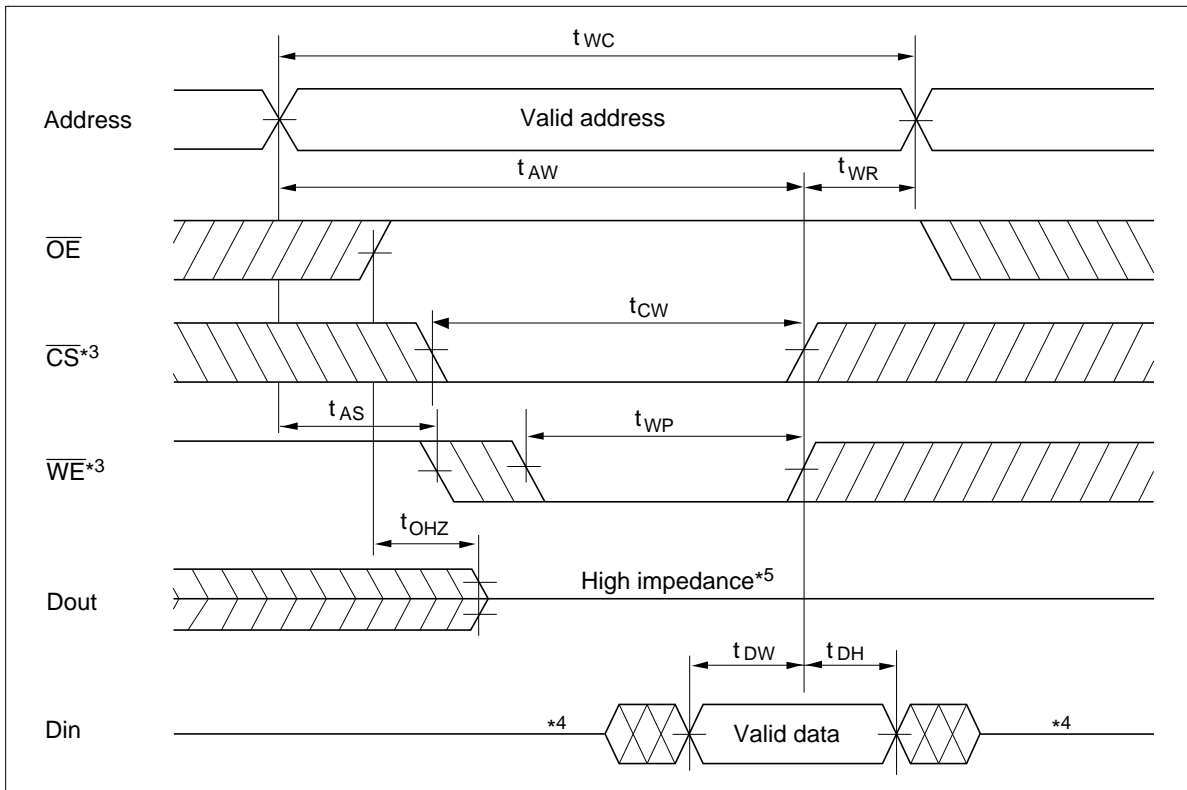

# HM62W9127HB Series

## Write Timing Waveform (2) ( $\overline{CS}$ Controlled)

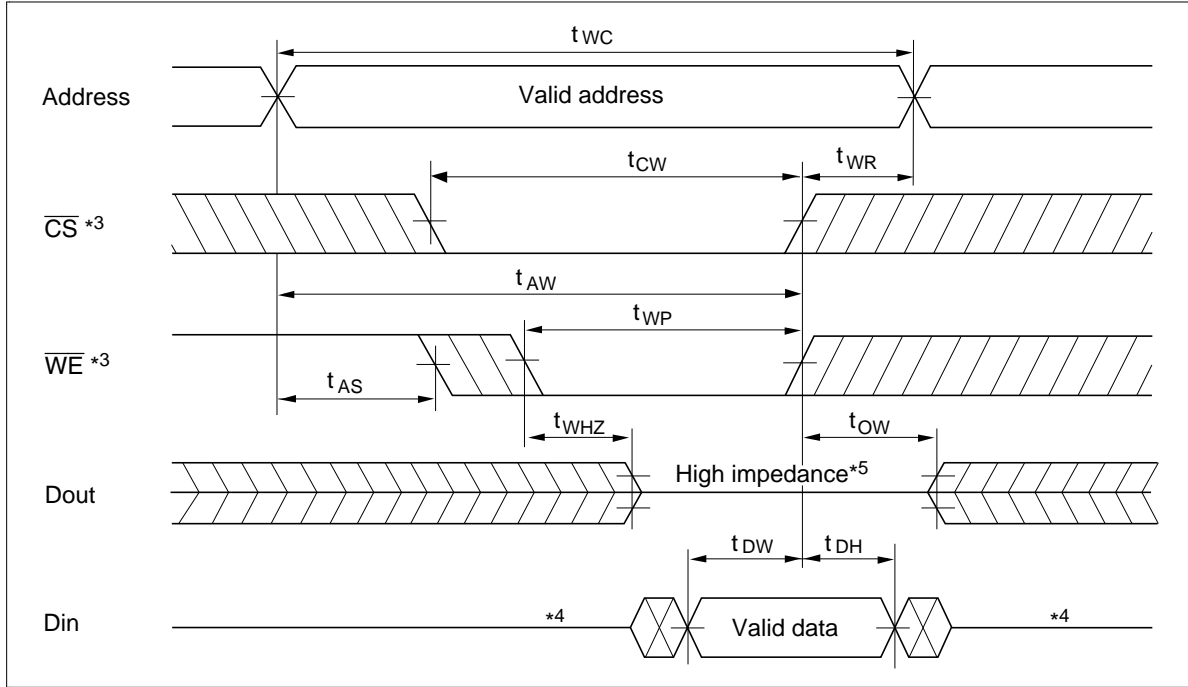


**Low  $V_{CC}$  Data Retention Characteristics** ( $T_a = 0$  to  $70^\circ\text{C}$ )

This characteristics is guaranteed only for L-version.

Parameter	Symbol	Min	Typ* <sup>1</sup>	Max	Unit	Test conditions
$V_{CC}$ for data retention	$V_{DR}$	2.0	—	—	V	$V_{CC} \geq \overline{CS} \geq V_{CC} - 0.2$ V (1) $0 \text{ V} \leq V_{in} \leq 0.2 \text{ V}$ or (2) $V_{CC} \geq V_{in} \geq V_{CC} - 0.2 \text{ V}$
Data retention current	$I_{CCDR}$	—	2	80	$\mu\text{A}$	$V_{CC} = 3 \text{ V}$ , $V_{CC} \geq \overline{CS} \geq V_{CC} - 0.2 \text{ V}$ (1) $0 \text{ V} \leq V_{in} \leq 0.2 \text{ V}$ or (2) $V_{CC} \geq V_{in} \geq V_{CC} - 0.2 \text{ V}$
Chip deselect to data retention time	$t_{CDR}$	0	—	—	ns	See retention waveform
Operation recovery time	$t_R$	5	—	—	ms	

Note: 1. Typical values are at  $V_{CC} = 3.0 \text{ V}$ ,  $T_a = +25^\circ\text{C}$ , and not guaranteed.

**Low  $V_{CC}$  Data Retention Timing Waveform**

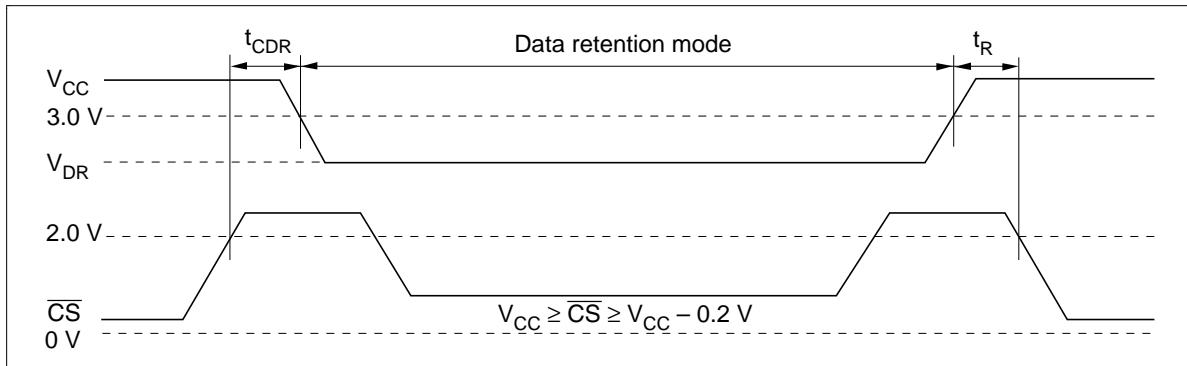


# HM62W9127HB Series

## Package Dimensions

### HM62W9127HBJP/LJP Series (CP-36D)

Unit: mm

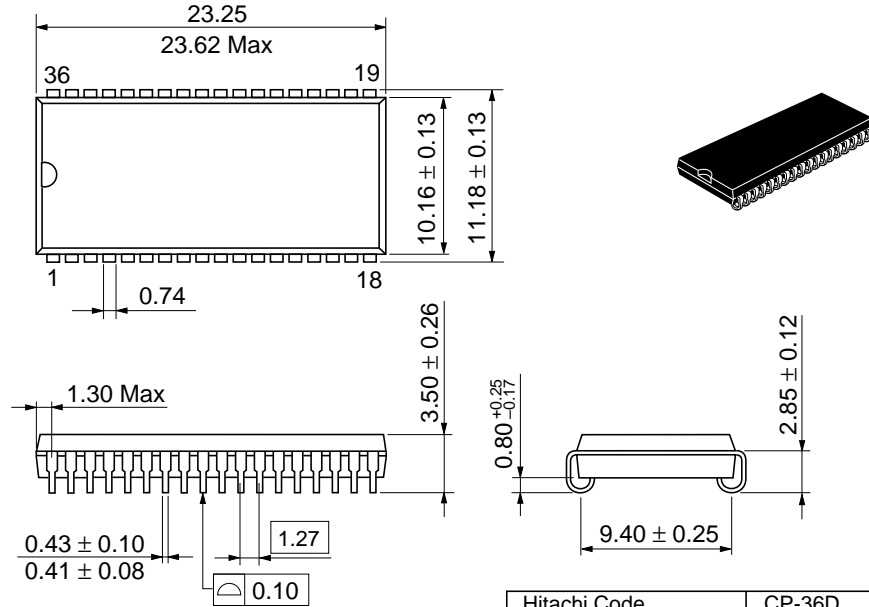

Dimension including the plating thickness  
Base material dimension

Hitachi Code	CP-36D
JEDEC	Conforms
EIAJ	Conforms
Weight (reference value)	1.4 g

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

---

---

# HITACHI

## Hitachi, Ltd.

Semiconductor & IC Div.  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100, Japan  
Tel: Tokyo (03) 3270-2111  
Fax: (03) 3270-5109

### For further information write to:

Hitachi America, Ltd.  
Semiconductor & IC Div.  
2000 Sierra Point Parkway  
Brisbane, CA. 94005-1835  
U S A  
Tel: 415-589-8300  
Fax: 415-583-4207

Hitachi Europe GmbH  
Continental Europe  
Dornacher Straße 3  
D-85622 Feldkirchen  
München  
Tel: 089-9 91 80-0  
Fax: 089-9 29 30-00

Hitachi Europe Ltd.  
Electronic Components Div.  
Northern Europe Headquarters  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA  
United Kingdom  
Tel: 01628-585000  
Fax: 01628-585160

Hitachi Asia Pte. Ltd.  
16 Collyer Quay #20-00  
Hitachi Tower  
Singapore 049318  
Tel: 535-2100  
Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.  
Unit 706, North Tower,  
World Finance Centre,  
Harbour City, Canton Road  
Tsim Sha Tsui, Kowloon  
Hong Kong  
Tel: 27359218  
Fax: 27306071

Copyright © Hitachi, Ltd., 1997. All rights reserved. Printed in Japan.

---

## HM62W9127HB Series

---

### Revision Record

Rev.	Date	Contents of Modification	Drawn by	Approved by
0.0	Jun. 9, 1997	Initial issue	Y. Saitoh	A. Ide
0.1	Nov. 1997	Change of Subtitle		

---