



PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


**SDRP600S10
thru
SDRP600S20**

Designer's Data Sheet

FEATURES:

- Forward current to 600 Amps
- PIV to 2000 Volts
- Transient Voltage rating of 200 Volts above PIV
- Pressure contact device (mounting force:1000 lbs)
- Single Chip construction
- Low forward voltage drop
- Hermetically sealed
- For High Power applications
- TX, TXV, and Space Level Screening available

**600 AMPS
1000-2000 VOLTS
25µsec
STANDARD RECOVERY
HIGH CURRENT RECTIFIER**

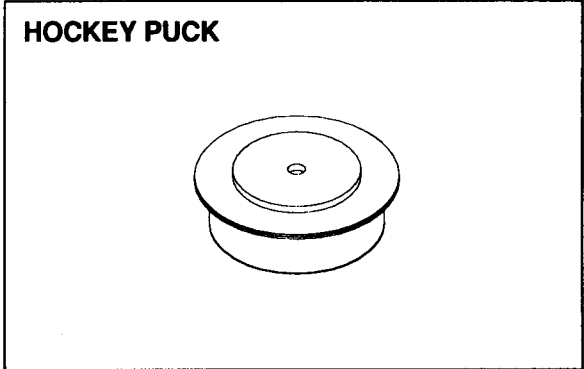

MAXIMUM RATINGS

RATING (Note 1)	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage SDRP600S10 SDRP600S15 SDRP600S20	VRRM	1000	Volts
	VRWM	1500	
	VR	2000	
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	600	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C)	IFSM	5000	Amps
Operating and storage temperature	Top & Tstg	-55 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	0.14	°C/W

Note 1: Mounting force=1000 lbs

SDRP600S10 thru SDRP600S20

PRELIMINARY




SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 600 Adc Pulse, TJ=25°C)	VF	1.25	Vdc
Instantaneous Forward Voltage Drop (IF = 600 Adc Pulse, TJ= +175°C)	VF	1.20	Vdc
Reverse Leakage Current (Rated VR pulse, TJ=25°C)	IR	2	mA
Reverse Leakage Current (Rated VR pulse, TJ=175°C)	IR	40	mA
Reverse Recovery Time (IFM=600 A, VR=400V, di/dt= -25μs, Rs=10Ω, Cs=0.5μF, TA=25°C)	trr	25	μsec

CASE OUTLINE: HOCKEY PUCK

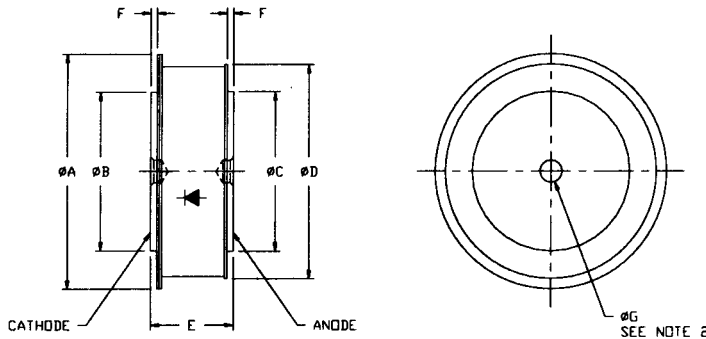

DIMENSIONS	
øA	1.47"
øB	0.995" ± .005
øC	1.000" ± .005
øD	1.34"
E	0.52"
F	.020"
øG	.140" (note 2)

Notes:

1. Tolerance on all dimensions to be ±.020" unless otherwise specified.
2. 0.068" ± .005 Deep (2 pl) .020" x 45° chamf

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

