

Thick Film Resistor Networks, Dual-In-Line, Wide Body, Small Outline, Molded DIP, Surface Mount



FEATURES

- Isolated, bussed and dual terminator schematics available
- 0.110" (2.79 mm) maximum seated height
- Rugged, molded case construction
- 0.050" (1.27 mm) lead spacing
- Reduces total assembly costs
- Compatible with automatic surface mounting equipment
- Uniform performance characteristics
- Meets EIA PDP 100, SOGN-0003 outline dimensions
- Available in tube pack or tape and reel pack
- Compliant to RoHS directive 2002/95/EC



RoHS* COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS							
GLOBAL MODEL	SCHEMATIC	POWER RATING		TOLERANCE (1) ± %	RESISTANCE RANGE Ω	MAXIMUM WORKING VOLTAGE (2) V _{DC}	TEMPERATURE COEFFICIENT ± ppm/°C
		ELEMENT P _{70°C} W	PACKAGE P _{70°C} W				
SOGC16	01	0.1	1.6	1, 2, 5	10 to 1M	50	100
	03	0.19	1.6	1, 2, 5	10 to 1M	50	100
	05	0.1	1.6	2, 5	10 to 1M	50	100
SOGC20	01	0.1	2.0	1, 2, 5	10 to 1M	50	100
	03	0.19	2.0	1, 2, 5	10 to 1M	50	100
	05	0.1	2.0	2, 5	10 to 1M	50	100

Notes


- 100 mΩ maximum on 0 Ω-jumper.
- (1) ± 2 % standard, ± 1 % and ± 5 % available.
- (2) Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.

GLOBAL PART NUMBER INFORMATION							
New Global Part Numbering: SOGC200310K0GDC (preferred part number format)							
S	O	G	C	2	0	0	3 1 0 K 0 G D C
GLOBAL MODEL SOGC	PIN COUNT 16 20	SCHEMATIC 01 = Bussed 03 = Isolated 00 = Special	RESISTANCE VALUE R = Ω K = kΩ M = MΩ 10R0 = 10 Ω 680K = 680 kΩ 1M00 = 1.0 MΩ	TOLERANCE CODE F = ± 1 % G = ± 2 % S = Special Z = 0 Ω Jumper	PACKAGING EJ = Lead (Pb)-free, tube EA = Lead (Pb)-free, tape and reel DC = Tin/lead, tube RZ = Tin/lead, tape and reel	SPECIAL Blank = Standard (Dash number) (Up to 3 digits) From 1 to 999 as applicable	
Historical Part Number Example: SOGC2003103G (will continue to be accepted)							
SOGC	20	03	103	G	D02		
HISTORICAL MODEL	PIN COUNT	SCHEMATIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING		
New Global Part Numbering: SOGC1605131AGRZ (preferred part number format)							
S	O	G	C	1	6	0	5 1 3 1 A G R Z
GLOBAL MODEL SOGC	PIN COUNT 16 20	SCHEMATIC 05 = Dual terminator	RESISTANCE VALUE 3 digit impedance code, followed by alpha modifier (see Impedance Codes table)	TOLERANCE CODE F = ± 1 % G = ± 2 % J = ± 5 %	PACKAGING EJ = Lead (Pb)-free, tube EA = Lead (Pb)-free, tape and reel DC = Tin/lead, tube RZ = Tin/lead, tape and reel	SPECIAL Blank = Standard (Dash number) (Up to 3 digits) From 1 to 999 as applicable	
Historical Part Number Example: SOGC1605221331G (will continue to be accepted)							
SOGC	16	05	221	331	G	R61	
HISTORICAL MODEL	PIN COUNT	SCHEMATIC	RESISTANCE VALUE 1	RESISTANCE VALUE 2	TOLERANCE CODE	PACKAGING	

* Pb containing terminations are not RoHS compliant, exemptions may apply



DIMENSIONS in inches (millimeters)

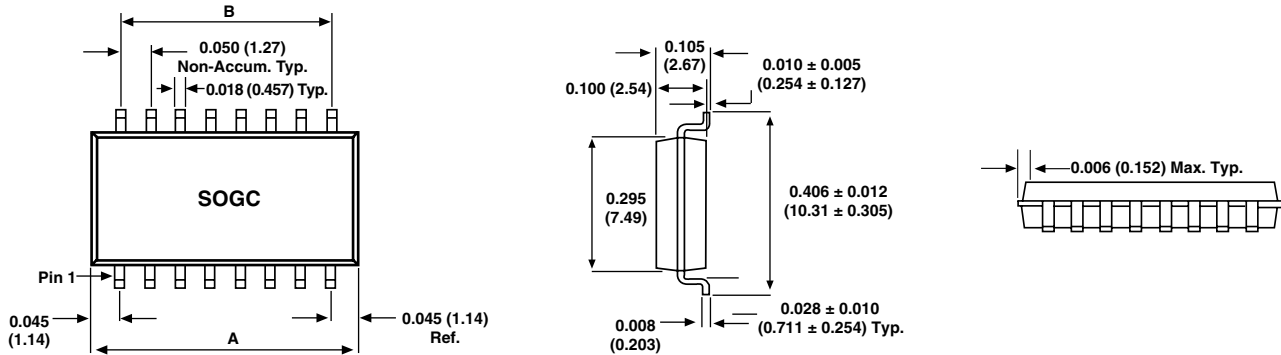


GLOBAL MODEL	A	B
SOGC16	0.440 (11.18)	0.350 (8.89)
SOGC20	0.540 (13.72)	0.450 (11.43)

TECHNICAL SPECIFICATIONS			
PARAMETER	UNIT	SOGC16	SOGC20
Package power rating (max. at + 70 °C)	W	1.6	2.0
TCR tracking (- 55 °C to + 125 °C)	ppm/°C	± 50	
Voltage coefficient of resistance	ppm/V	< 50 typical	
Maximum operating voltage	V _{DC}	50	
Operating temperature range	°C	- 55 to + 125	
Storage temperature range	°C	- 55 to + 150	

MECHANICAL SPECIFICATIONS	
Marking	Model number, schematic number, value tolerance, pin 1 indicator, date code
Marking resistance to solvents	Permanency testing per MIL-STD-202, method 215
Maximum solder reflow temperature	+ 255 °C
Solderability	Per MIL-STD-202, method 208E
Terminals	Copper alloy. Solder dipped terminal
Body	Molded epoxy

IMPEDANCE CODES					
CODE	R ₁ (Ω)	R ₂ (Ω)	CODE	R ₁ (Ω)	R ₂ (Ω)
500B	82	130	141A	270	270
750B	120	200	181A	330	390
800C	130	210	191A	330	470
990A	160	260	221B	330	680
101C	180	240	281B	560	560
111C	180	270	381B	560	1.2K
121B	180	390	501C	620	2.7K
121C	220	270	102A	1.5K	3.3K
131A	220	330	202B	3K	6.2K

CIRCUIT APPLICATIONS	
<p>01 Schematic</p>	<p>15 or 19 resistors with one pin common</p> <p>The SOGCxx01 circuit provides a choice of 15 or 19 nominally equal resistors, each connected between a common lead (16 or 20) and a discrete PC board pin. Commonly used in the following applications:</p> <ul style="list-style-type: none"> • MOS/ROM pull-up/pull-down • Open collector pull-up • “Wired OR” pull-up • Power driven pull-up • TTL input pull-down • Digital pulse squaring • TTL unused gate pull-up • High speed parallels pull-up
<p>03 Schematic</p>	<p>8 or 10 isolated resistors</p> <p>The SOGCxx03 circuit provides a choice of 8 or 10 nominally equal resistors with each resistor isolated from all others and wired directly across. Commonly used in the following applications:</p> <ul style="list-style-type: none"> • “Wired OR” pull-up • Power driven pull-up • Powergate pull-up • Line termination • Long-line Impedance balancing • LED current limiting • ECL output pull-down • TTL input pull-down
<p>05 Schematic</p>	<p>TTL dual-line terminator; pulse squaring, 14 or 18 pairs of resistors (R₁ resistors are common to leads 16 or 20) (R₂ resistors are common to leads 8 or 10)</p> <p>The SOGCxx05 circuit contains 14 or 18 pairs of resistors. Each pair is connected between ground and a common line. The junctions of these resistor pairs are connected to the input leads.</p> <p>The 05 circuits are designed for TTL dual-line termination and pulse squaring.</p>

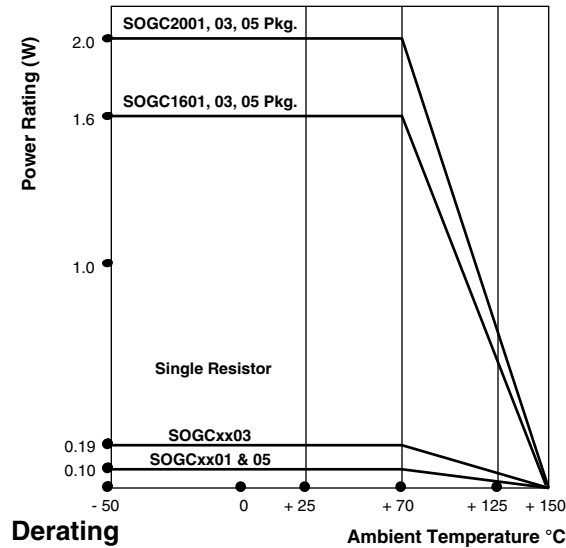

PERFORMANCE	
TEST	MAX. ΔR (TYPICAL TEST LOTS)
Power conditioning	$\pm 0.50\% \Delta R$
Thermal shock	$\pm 0.50\% \Delta R$
Short time overload	$\pm 0.25\% \Delta R$
Low temperature operation	$\pm 0.25\% \Delta R$
Moisture resistance	$\pm 0.50\% \Delta R$
Resistance to soldering heat	$\pm 0.25\% \Delta R$
Shock	$\pm 0.25\% \Delta R$
Vibration	$\pm 0.25\% \Delta R$
Load life	$\pm 0.50\% \Delta R$
Terminal strength	$\pm 0.25\% \Delta R$
Insulation resistance	10 000 M Ω (minimum)
Dielectric withstanding voltage	No evidence of arcing or damage (200 V _{RMS} for 1 min)



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.