




FEATURES

- Plastic package has Underwriters Laboratory
- Flammability classification 94V-0 Utilizing Flame
- Retardant Epoxy Molding Compound
- For surface mount applications
- Low leakage current.

Mechanical Data

- Case: SOD-123FL, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.017 grams

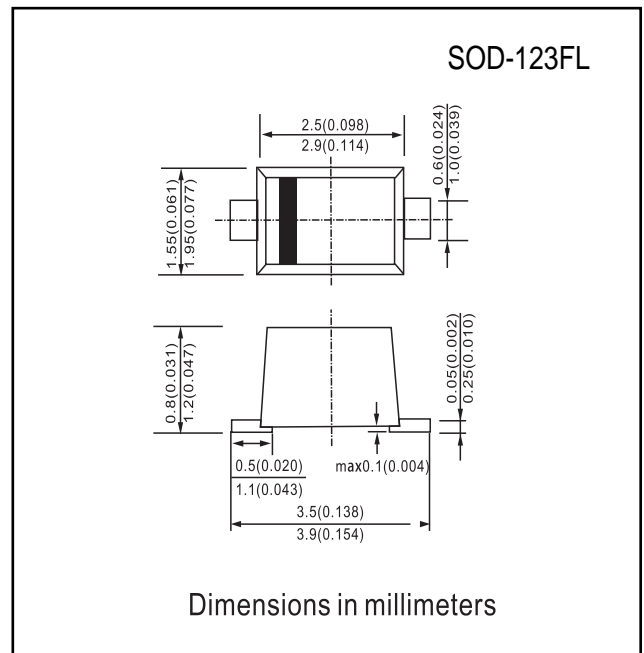

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings @T_A=25°C unless otherwise specified

Characteristics	Symbol	SS2020FL	SS2030FL	SS2040FL	SS2050FL	SS2060FL	SS2080FL	SS20100FL	Unit	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	v	
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	V	
Continuous Reverse Voltage	V _R	20	30	40	50	60	80	100	v	
Maximum Instantaneous @T _A =25 C	V _F	0.5			0.7		0.85		V	
Maximum Average Forward (Fig.1)	I _O	2.0								A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50								A
Maximum DC Reverse Current @T _A =25°C At Rated DC Blocking Voltage @T _A =125°C	I _R	0.5 10								mA
Typical Thermal Resistance	R _{θJA}	85(TYP)								°C/W
Typical Junction Capacitance	C _J	160(TYP)								pF
Operating Temperature Range	T _J	-55 to+125			-55 to+150					°C
Storage Temperature Range	T _{STG}	-55 to+150								°C

RATINGS AND CHARACTERISTIC CURVES SS2020FL THRU SS20100FL

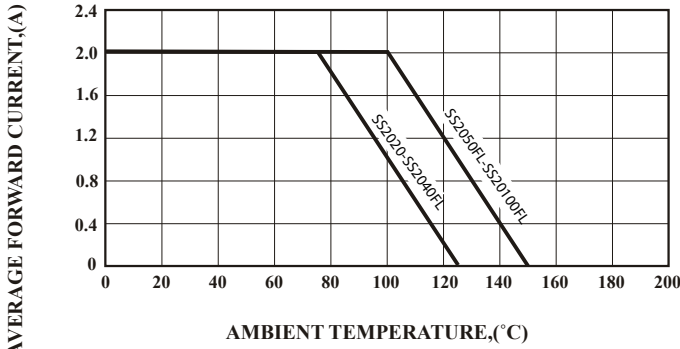


FIG.1 Typical Forward Current Derating Curve

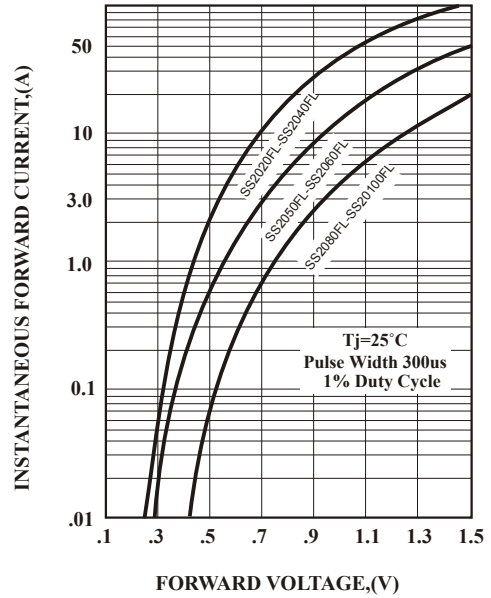


FIG.2 Typical Forward Characteristics

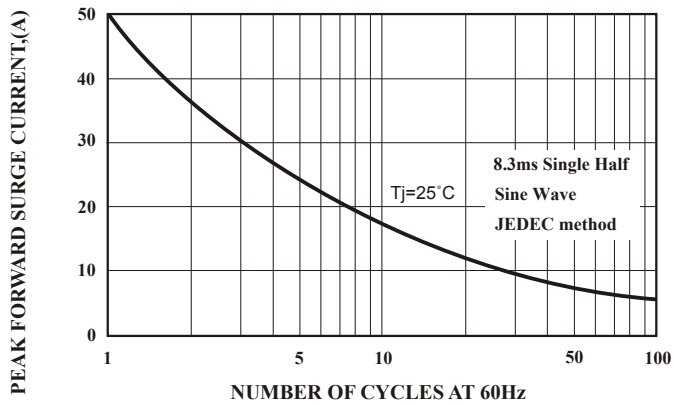


FIG.3 Maximum Non-Repetitive Forward Surge Current

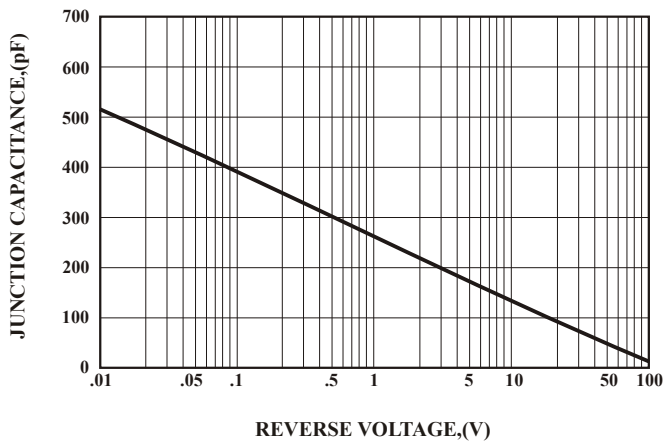


FIG.4 Typical Junction Capacitance

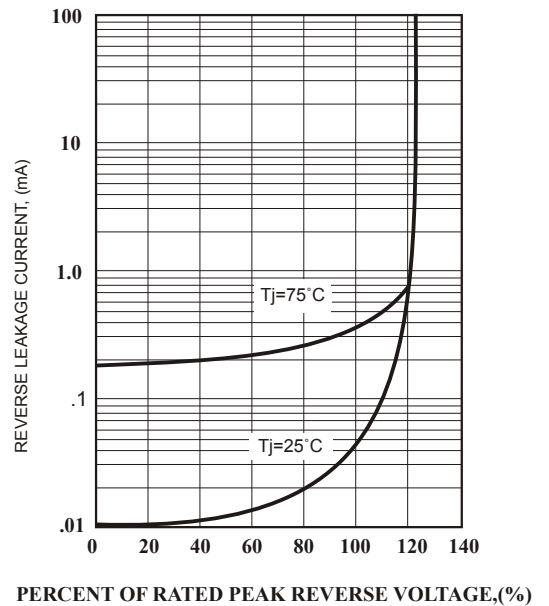


FIG.5 Typical Reverse Characteristics