



Rating	20A 125VAC 10A 25VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP 	Mounting Hole 	Circuit Diagram 
	21A 14VDC		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~+85°	Thickness(mm) 0.75~1.25	X(mm) 21.2+0.1
Switch Function	6P DPDT ON-OFF-ON	1.25~2.0	Y(mm) 36.6 ^{+0.2} _{-0.2}
		2.0~3.0	36.8 ^{+0.2} _{-0.2} 37.0 ^{+0.2} _{-0.2}



* MATERIAL:

Frame: Nylon#66, Black

Actuator: Nylon#66 with 33%GF, Black

Printed: None

Water proof and dust proof to fit IP-56

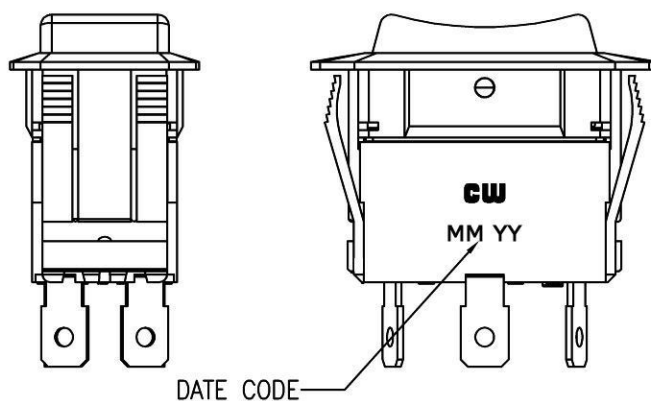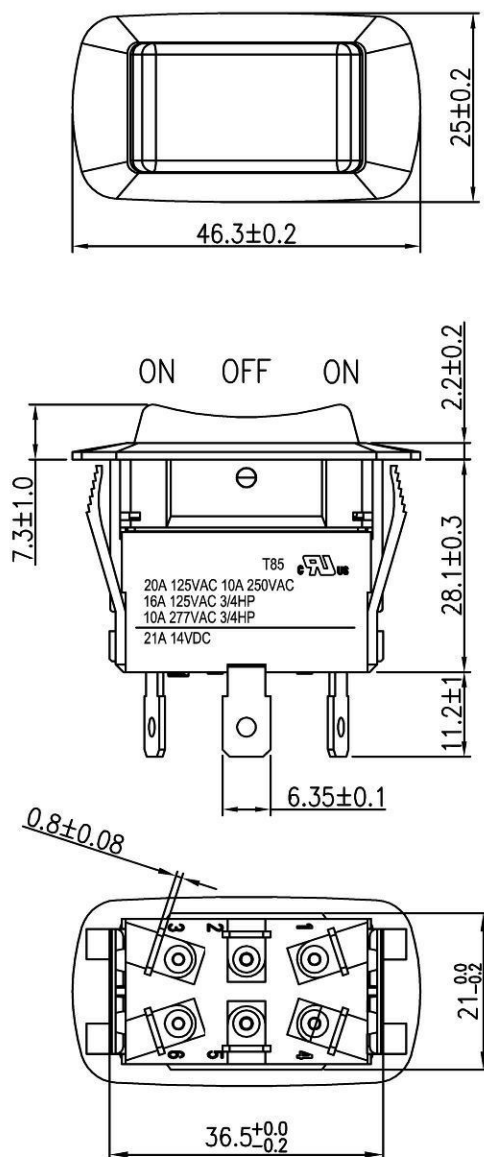

DATE CODE

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/18/10

Rev. 0

Unit: mm

Checked By: EJP

Title: **ROCKER SWITCH**

CW P/N: **GRB260E101BBNN**