



1. CONFIGURATION & DIMENSIONS :

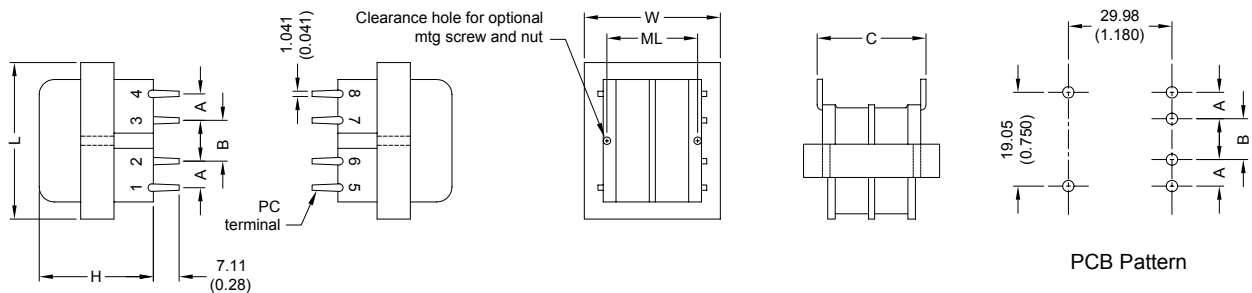

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
3	2.4	35.50 (1.40)	30.00 (1.180)	30.50 (1.20)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	110

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|--|
| a. Primary Voltage | AC 115 V 60 Hz . |
| b. No Load Primary Current | Less Than 15mA . |
| c. Secondary Voltage (±5%) | Series AC 32.20V .
Parallel AC 16.10V . |
| d. Secondary Load Current | Series 0.1A .
Parallel 0.2A . |
| e. Full Load Primary Current | Less Than 40mA . |
| f. Full Load Secondary Voltage (±5%) | Series 24.00V .
Parallel 12.00V . |
| g. DC Resistance | |
| Pin 1-4 | Primary = 416 Ohm . |
| Pin 5-6 | Secondary = - Ohm . |
| Pin 7-8 | = - Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 2500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-35 x 14.00 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD