

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 9 circuits

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5197-N housing
 Designed In: Millimeters

Electrical


Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.

Physical


Housing: 6/6 nylon, UL 94V-2
 Contact: Brass, 1.14mm (.045") square
 Plating: Tin
 Operating Temperature: -40 to +105°C

molex® 5.08mm (.200") Pitch
SPOX™
Header

5280-NA
Right Angle

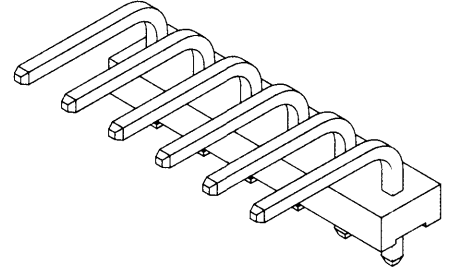

CATALOG DRAWING (FOR REFERENCE ONLY)

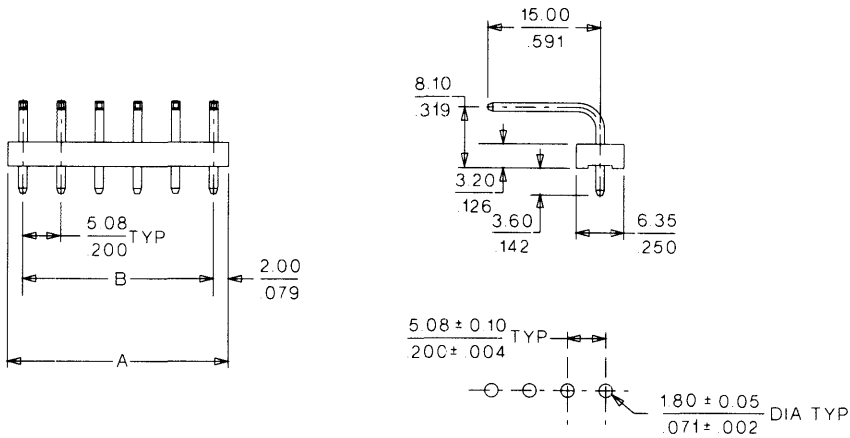

PCB LAYOUT: COMPONENT SIDE
 RECOMMENDED PCB THICKNESS: $\frac{1.60 \pm 0.10}{.063 \pm 0.04}$

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	10-33-1021	9.08 (.357)	5.08 (.199)
3	10-33-1031	14.16 (.557)	10.16 (.399)
4	10-33-1041	19.24 (.757)	15.24 (.599)
5	10-33-1051	24.32 (.957)	20.32 (.799)
6	10-33-1061	29.40 (1.157)	25.40 (1.000)
7	10-33-1071	34.48 (1.357)	30.48 (1.199)
8	10-33-1081	39.56 (1.557)	35.56 (1.399)
9	10-33-1091	44.64 (1.757)	40.64 (1.599)

D
 3.00 to 7.92mm (.118 to .312") Pitch