

Shock-Safe Fuseholder, 6.3 x 32 mm, NF, Fingerrip, IP 68



250 VAC · 3.6W/16A (NF)

**Description**

- IP 68 from front-side
- Screw type fuse carrier

Standards

- NF C 93-436 - Modell HB14
- Contrôle de Conformité de Qualité (CCQ)

References

General Product Information

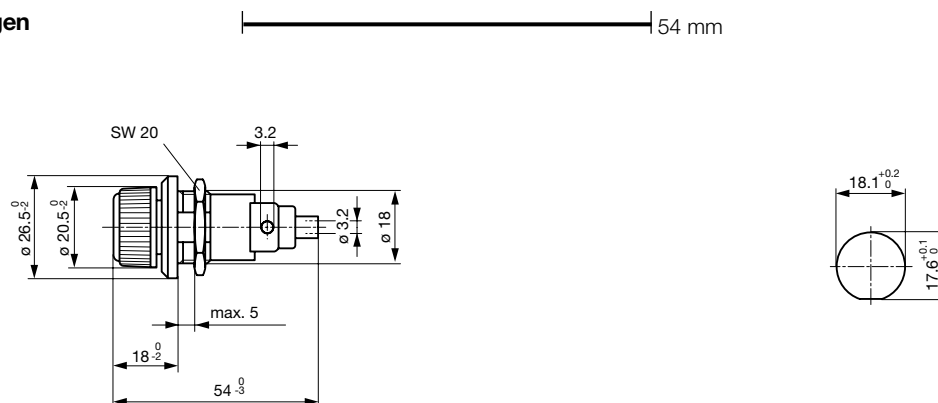
Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

Technical Data

Fuse-Link	6.3 x 32 mm
Mounting	Panel Mount, Front-Side
Mounting	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated Current	16 A (NF)
Rated Power Acceptance IEC	3.6W / 16A @ Ta 23 °C
Degree of Protection	IP 68
Admissible Ambient Air Temp.	-40 °C to 125 °C
Climatic Category	40/125/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight (Socket/Cap)	38 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Voltage, Current

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2 Nm
Panel Thickness s	max 5 mm

Abmessungen

Mounting holes

Variants

Holder	Cap	Degree of Protection	Order Number
●	Fingerrip	IP 68	7093.0110

Packaging Unit Bulk (10 pcs.)