

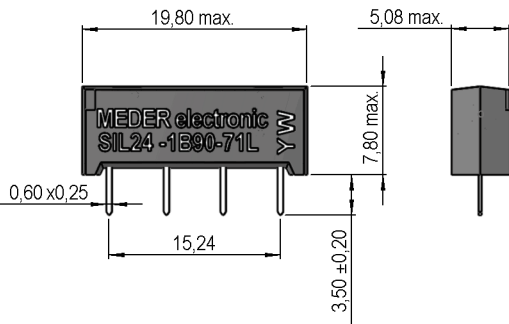


Dimensions




Layout 71D Pitch 2.54 / Top View



MARKING

MEDER-label, type
 Production code EN60062/factory code
 MEDER-Logo, Typ
 Produktionscode EN60062/Fertigungsstätte



tolerances according to DIN ISO 2768 m

| Coil Data at 20 °C | Conditions | Min | Typ | Max | Unit |
|--------------------|--|-------|-------|-------|------|
| Coil resistance | | 1.800 | 2.000 | 2.200 | Ohm |
| Coil voltage | | | 24 | | VDC |
| Rated power | | | 288 | | mW |
| Coil current | | | 12 | | mA |
| Thermal resistance | max. Relay temperature = operating temperature + self heating | | 95 | | K/W |
| Inductance | | | 220 | | mH |
| Pull-In voltage | | | | 16,8 | VDC |
| Drop-Out voltage | | 3,6 | | | VDC |

| Contact Data 94 | Conditions | Min | Typ | Max | Unit |
|---------------------------|--|-----|-----|------|------|
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 10 | W |
| Switching voltage | DC or Peak AC | | | 175 | V |
| Switching current | DC or Peak AC | | | 0,25 | A |
| Carry current | DC or Peak AC | | | 1,2 | A |
| Contact resistance static | Measured with 40% overdrive Start Value | | | 150 | mOhm |
| Insulation resistance | RH <45 %, 100 V test voltage | 1 | | | TOhm |
| Breakdown voltage | according to IEC 255-5 | 200 | | | VDC |
| Operate time incl. bounce | measured with 40% overdrive | | | 0,7 | ms |
| Release time | measured with no coil excitation | | | 1 | ms |
| Capacity | @ 10 kHz across open switch | | 0,3 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|------------------------------------|-------------------------------|-----|---------------------------|-----|-------|
| Number of contacts | | | 1 | | |
| Contact - form | | | B - NC | | |
| Dielectric Strength Coil/Contact | according to IEC 255-5 | 1,5 | | | kV DC |
| Insulation resistance Coil/Contact | RH <45%, 100 VDC test voltage | 10 | | | TOhm |
| Capacity Coil/Contact | @ 10 kHz | | 0,8 | | pF |
| Case colour | | | black | | |
| Housing material | | | epoxy resin | | |
| Connection pins | | | FeNi42, tin plated | | |
| Magnetic Shield | | | no | | |
| Approval | | | UL-File No. NRNT2.E156887 | | |
| Approval | | | UL-File No. NRNT8.E156887 | | |
| Reach / RoHS conformity | | | yes | | |

Modifications in the sense of technical progress are reserved

Designed at: 01.09.09 Designed by: KSCHIELENSKI
 Last Change at: Last Change by:

Approval at: Approval by:
 Approval at: Approval by:

Version: 01



Products for tomorrow...

Europe: +49 / 7731 8399 0

| Email: info@meder.com

USA: +1 / 508 295 0771

| Email: salesusa@meder.com

Asia: +852 / 2955 1682

| Email: salesasia@meder.com

Item No.:

3324190071

Item:

SIL24-1B90-71L

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|-----------------------------|--------------|-----|-----|------|
| Shock | 1/2 sine wave duration 11ms | | | 50 | g |
| Vibration | from 10 - 2000 Hz | | | 20 | g |
| Operating temperature | | -20 | | 70 | °C |
| Storage temperature | | -35 | | 95 | °C |
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |
| Washability | | fully sealed | | | |

| General data | Conditions | Min | Typ | Max | Unit |
|---------------|------------|----------------|-----|-----|------|
| Total weighth | | | 1,5 | | g |
| Packaging | | Stange 25 pcs. | | | |

Modifications in the sense of technical progress are reserved

Designed at: 01.09.09

Designed by: KSCHIELENSKI

Approval at:

Approval by:

Last Change at:

Last Change by:

Approval at:

Approval by:

Version: 01