


| DATE     | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|----------|-----|-----------------|-------|-----|-----|
| 11/13/98 | -   | ISSUED          |       | NT  | GH  |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |

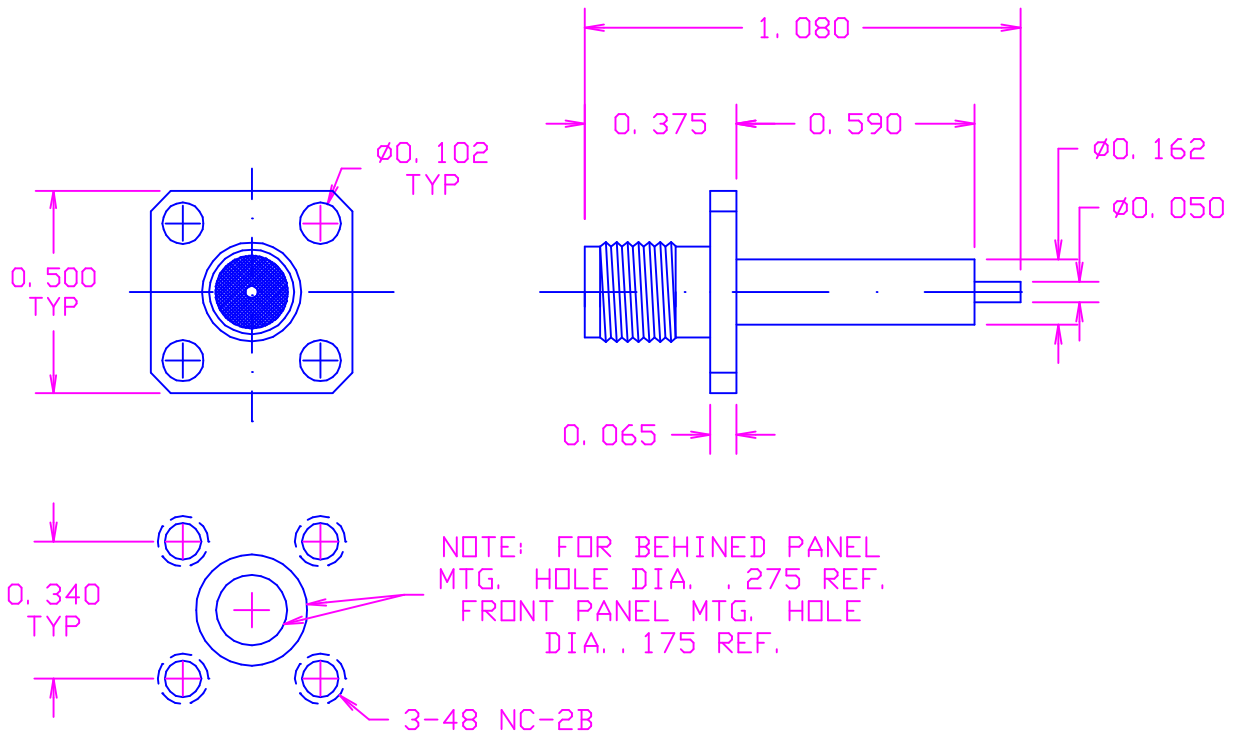

MATERIAL: BODY- BRASS PER ASTM B16

CONTACT- BERYLLIUM COPPER PER ASTM B196

INSULATION- TFE FLUOROCARBON PER L-P-403, TYPE I

ACTUAL SIZE

FINISH: CENTER CONTACT- .000050"MIN. GOLD PER



MIL-G-45204B, TYPE I, GRADE C, CLASS 2

OVER .0001"MIN. COPPER

OTHER METAL PARTS- GOLD PLATED

IMPEDANCE: 50 OHMS REF.

FREQUENCY: 0 TO 18.0 GHz REF.



|                                 |                                                          |                                  |                                            |
|---------------------------------|----------------------------------------------------------|----------------------------------|--------------------------------------------|
| TOLERANCES<br>(EXCEPT AS NOTED) | CONCORD ELECTRONICS CORPORATION                          |                                  |                                            |
| DECIMAL<br>+<br>—               | P/N                                                      | SCALE                            | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>+<br>—            | TITLE<br>STRAIGHT JACK,FLANGE MOUNT<br>STRAIGHT TERMINAL |                                  |                                            |
| ANGULAR<br>+<br>—               | DATE<br>9-19-96                                          | DRAWING NUMBER<br>800—1205—03—3B |                                            |