

BOARD-TO-CABLE FEMALE CONNECTOR

IDC Type and Solder Type Female Connector for Cable

Ordering Information

PCR-E()F


① ② ③

① Series Prefix

② Number of Contacts: 20, 28, 36, 50, 68, 96


③ Compatible Wire Size

- F : #28AWG (7/0.127), #30AWG (1/0.254)
Outside housing dia. 0.8 to 1.0 mm, IDC for discrete wire
- FA : #28AWG (7/0.127), #30AWG (1/0.254)
Outside housing 0.5 to 0.65 mm, IDC for discrete wire
- FB : #30AWG (7/0.1), outside housing dia. 0.5 to 0.65 mm, IDC for discrete wire
- FC : #28AWG (7/0.127), IDC for cohesion type cable
- FD : #30AWG (7/0.1), IDC for cohesion type cable
- FS : Solder type, #20AWG maximum

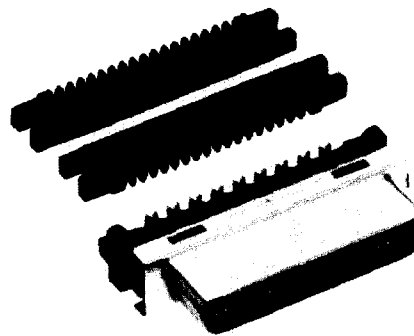


PCR-E36F

IDC Type Female Connector for Cable PCR-E()F()

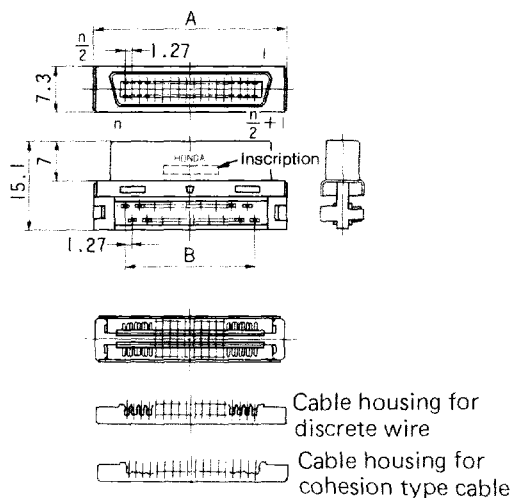

No. of contacts	Part No.	A	B
20	PCR-E20F()	21.65	11.43
28	PCR-E28F()	26.7	16.51
36	PCR-E36F()	31.8	21.59
50	PCR-E50F()	40.7	30.48
68	PCR-E68F()	52.1	41.91
96	PCR-E96F()	69.9	59.69

Solder Type Female Connector for Cable PCR-E()FS

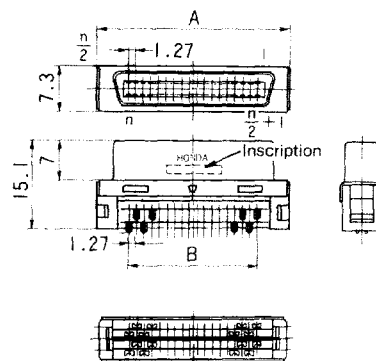

No. of contacts	Part No.	A	B
20	PCR-E20FS	21.65	11.43
* 28	PCR-E28FS	26.7	16.51
36	PCR-E36FS	31.8	21.59
50	PCR-E50FS	40.7	30.48
* 68	PCR-E68FS	52.1	41.91
* 96	PCR-E96FS	69.9	59.69

marked with * are in the planning stage.