

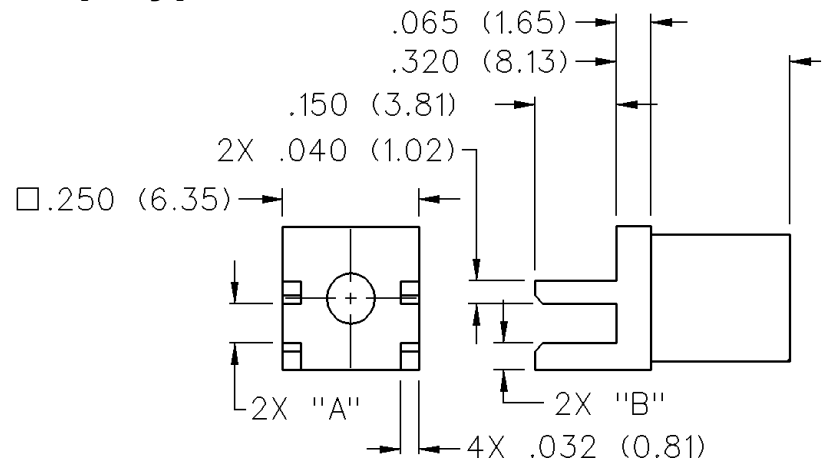



Flexible Cable - Straight Crimp Type End Launch

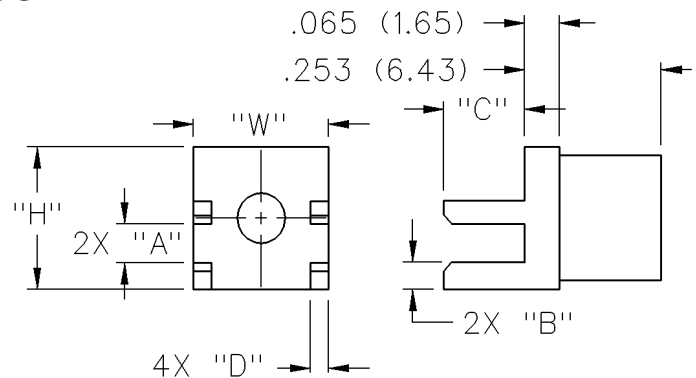

CABLE TYPE	BOARD THICKNESS	GOLD PLATED	"A"	"B"
RG178/U, 196	0.062 (1.57)	142-0002-801	0.068 (1.73)	0.050 (1.27)
RG316/U, 188, 174, 161, 179, 187	0.062 (1.57)	142-0003-801	0.068 (1.73)	0.046 (1.02)
RG316 DS, 188 DS, 179 DS, 187 DS	0.062 (1.57)	142-0004-801	0.068 (1.73)	0.046 (1.02)
RG58/U, 141, 303	0.062 (1.57)	142-0007-801	0.068 (1.73)	0.037 (1.65)
RG142/U, 55, 223, 400	0.062 (1.57)	142-0008-801	0.068 (1.73)	0.037 (1.65)
RG178/U, 196	0.047 (1.19)	142-0002-811	0.053 (1.35)	0.065 (1.65)
RG316/U, 188, 174, 161, 179, 187	0.047 (1.19)	142-0003-811	0.053 (1.35)	0.061 (1.55)
RG316 DS/ 188 DS, 179 DS, 187 DS	0.047 (1.19)	142-0004-811	0.053 (1.35)	0.061 (1.55)
RG58/U, 141, 303	0.047 (1.19)	142-0007-811	0.053 (1.35)	0.052 (1.32)
RG142/U, 55, 223, 400	0.047 (1.19)	142-0008-811	0.053 (1.35)	0.052 (1.32)

Semi-Rigid - Straight Solder Type End Launch



CABLE TYPE	BOARD THICKNESS	GOLD PLATED	"A"	"B"	"W"	"H"	"C"	"D"
.086 Semi-Rigid	0.062 (1.57)	142-0093-801	0.068 (1.73)	0.046 (1.42)	0.250 (6.35)	.250 (6.35)	.150 (3.81)	.032 (0.81)
.141 Semi-Rigid	0.062 (1.57)	142-0094-801	0.068 (1.73)	0.070 (1.78)	0.375 (9.52)	.312 (7.92)	.187 (4.77)	.040 (1.02)
.250 Semi-Rigid	0.062 (1.57)	142-0096-801	0.068 (1.73)	0.053 (1.35)	0.375 (9.52)	.312 (7.92)	.187 (4.77)	.050 (1.27)