


TGL41-6.8 THRU TGL41-200CA

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Breakdown Voltage - 6.8 to 200 Volts Peak Pulse Power - 400 Watts

DO-213AB

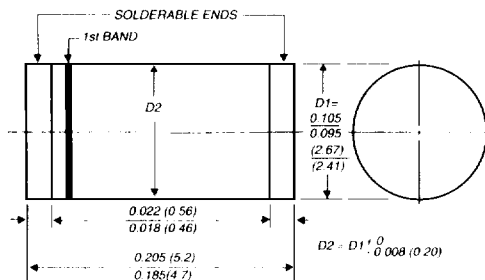

1st band denotes type and positive end (cathode)

Dimensions in inches
and
(millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Glass passivated junction
- ◆ Excellent clamping capability
- ◆ Low incremental surge resistance
- ◆ Fast response time typically less than 1.0ps from 0 Volts to V_{BR} for unidirectional and 5.0ns for bidirectional types
- ◆ 400W peak pulse capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01%
- ◆ For devices with $V_{BR} \geq 10V$, I_D are typically less than 1.0 μ A
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals



MECHANICAL DATA

Case: JEDEC DO-213AB molded plastic body over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Blue bands denotes positive end (cathode) for unidirectional and a yellow band in the middle for bidirectional types

Mounting Position: Any

Weight: 0.116 gram, 0.0046 ounce

DEVICES FOR BIDIRECTIONAL APPLICATIONS

For bidirectional applications use suffix letters C or CA for types TGL41-6.8 thru TGL41-200A (e.g. TGL41-6.8C, TGL41-200CA). Electrical characteristics apply in both directions.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

RATINGS	SYMBOL	VALUE	UNITS
Peak pulse power dissipation with a 10/1000 μ s waveform (NOTE 1, FIG. 1)	PPPM	Minimum 400	Watts
Steady state power dissipation at $T_T = 75^\circ\text{C}$ (NOTE 2)	$P_{M(AV)}$	1.0	Watt
Peak pulse current with a 10/1000 μ s waveform (NOTE 1, FIG. 3)	IPPM	SEE TABLE 1	Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load for unidirectional only (JEDEC Method) (NOTE 3)	I_{FSM}	40.0	Amps
Maximum instantaneous forward voltage at 25A (NOTE 3) for unidirectional only	V_F	3.5	Volts
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

NOTES:

- (1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2
- (2) Mounted on copper pads to each terminal of 0.31 in. (8.0 mm) per Fig. 5
- (3) Measured at 8.3ms single half sine-wave or equivalent square wave duty cycle=4 pulses per minute maximum

ELECTRICAL CHARACTERISTICS at (TA=25°C unless otherwise noted)

Device Type	Breakdown Voltage V _(BR) (Volts) (NOTE 1)		Test Current at I _T (mA)	Stand-off Voltage V _{WM} (NOTE 4) (Volts)	Maximum Reverse Leakage at V _{WM} I _R (μA) (NOTE 4)	Maximum Peak Pulse Current I _{PPM} (NOTE 2) (Amps)	Maximum Clamping Voltage at I _{PPM} V _C (Volts)	Maximum Temperature Coefficient of V _(BR) (% / °C)
	MIN	MAX						
TGL41-6.8	6.12	7.48	10.0	5.50	1000.0	38.7	10.8	0.060
TGL41-6.8A	6.45	7.14	10.0	5.80	1000.0	40.0	10.5	0.060
TGL41-7.5	6.75	8.25	10.0	6.05	500.0	36.0	11.7	0.064
TGL41-7.5A	7.13	7.88	10.0	6.40	500.0	37.1	11.3	0.064
TGL41-8.2	7.38	9.02	10.0	6.63	200.0	33.6	12.5	0.068
TGL41-8.2A	7.79	8.61	10.0	7.02	200.0	34.7	12.1	0.068
TGL41-9.1	8.19	10.0	1.0	7.37	50.0	30.4	13.8	0.071
TGL41-9.1A	8.65	9.55	1.0	7.78	50.0	31.3	13.4	0.071
TGL41-10	9.00	11.0	1.0	8.10	10.0	28.0	15.0	0.076
TGL41-10A	9.50	10.5	1.0	8.55	10.0	28.9	14.5	0.076
TGL41-11	9.90	12.1	1.0	8.92	5.0	25.9	16.2	0.078
TGL41-11A	10.5	11.6	1.0	9.40	5.0	26.9	15.6	0.078
TGL41-12	10.8	13.2	1.0	9.72	5.0	24.2	17.3	0.081
TGL41-12A	11.4	12.6	1.0	10.2	5.0	25.1	16.7	0.081
TGL41-13	11.7	14.3	1.0	10.5	5.0	22.1	19.0	0.084
TGL41-13A	12.4	13.7	1.0	11.1	5.0	23.0	18.2	0.084
TGL41-15	13.5	16.5	1.0	12.1	5.0	19.0	22.0	0.087
TGL41-15A	14.3	15.8	1.0	12.8	5.0	19.8	21.2	0.087
TGL41-16	14.4	17.6	1.0	12.9	5.0	17.8	23.5	0.089
TGL41-16A	15.2	16.8	1.0	13.6	5.0	18.6	22.5	0.089
TGL41-18	16.2	19.8	1.0	14.5	5.0	15.8	26.5	0.091
TGL41-18A	17.1	18.9	1.0	15.3	5.0	16.6	25.2	0.091
TGL41-20	18.0	22.0	1.0	16.2	5.0	14.4	29.1	0.093
TGL41-20A	19.0	21.0	1.0	17.1	5.0	15.1	27.7	0.093
TGL41-22	19.8	24.2	1.0	17.8	5.0	13.1	31.9	0.095
TGL41-22A	20.9	23.1	1.0	18.8	5.0	13.7	30.6	0.095
TGL41-24	21.6	26.4	1.0	19.4	5.0	12.1	34.7	0.097
TGL41-24A	22.8	25.2	1.0	20.5	5.0	12.6	33.2	0.097
TGL41-27	24.3	29.7	1.0	21.8	5.0	10.7	39.1	0.099
TGL41-27A	25.7	28.4	1.0	23.1	5.0	11.2	37.5	0.099
TGL41-30	27.0	33.0	1.0	24.3	5.0	9.8	43.5	0.100
TGL41-30A	28.5	31.5	1.0	25.6	5.0	10.1	41.4	0.100
TGL41-33	29.7	36.3	1.0	26.8	5.0	8.8	47.7	0.101
TGL41-33A	31.4	34.7	1.0	28.2	5.0	9.1	45.7	0.101
TGL41-36	32.4	39.6	1.0	29.1	5.0	8.0	52.0	0.102
TGL41-36A	34.2	37.8	1.0	30.8	5.0	8.4	49.9	0.102
TGL41-39	35.1	42.9	1.0	31.6	5.0	7.4	56.4	0.103
TGL41-39A	37.1	41.0	1.0	33.3	5.0	7.7	53.9	0.103
TGL41-43	38.7	47.3	1.0	34.8	5.0	6.7	61.9	0.104
TGL41-43A	40.9	45.2	1.0	36.8	5.0	7.0	59.3	0.104
TGL41-47	42.3	51.7	1.0	38.1	5.0	10.6	67.8	0.104

ELECTRICAL CHARACTERISTICS at (TA=25°C unless otherwise noted)

Device Type	Breakdown Voltage V _(BR) Volts (NOTE 1)		Test Current at I _T (mA)	Stand-off Voltage V _{WM} (Volts)	Maximum Reverse Leakage at V _{WM} I ₀ (μA)	Maximum Peak Pulse Current I _{PPM} (NOTE 2) (Amps)	Maximum Clamping Voltage at I _{PPM} V _C (Volts)	Maximum Temperature Coefficient of V _(BR) (% / °C)
	MIN	MAX						
TGL41-47A	44.7	49.4	1.0	40.2	5.0	6.4	64.8	0.104
TGL41-51	45.9	56.1	1.0	41.3	5.0	5.7	73.5	0.105
TGL41-51A	48.5	53.6	1.0	43.6	5.0	5.9	70.1	0.105
TGL41-56	50.4	61.6	1.0	45.4	5.0	5.2	80.5	0.106
TGL41-56A	53.2	58.8	1.0	47.8	5.0	5.4	77.0	0.106
TGL41-62	55.8	68.2	1.0	50.2	5.0	4.7	89.0	0.107
TGL41-62A	58.9	65.1	1.0	53.0	5.0	4.9	85.0	0.107
TGL41-68	61.2	74.8	1.0	55.1	5.0	4.2	98.0	0.107
TGL41-68A	64.6	71.4	1.0	58.1	5.0	4.5	92.0	0.107
TGL41-75	67.5	82.5	1.0	60.7	5.0	3.8	108.0	0.108
TGL41-75A	71.3	78.8	1.0	64.1	5.0	4.0	103.0	0.108
TGL41-82	73.8	90.2	1.0	66.4	5.0	3.5	118.0	0.108
TGL41-82A	77.9	86.1	1.0	70.1	5.0	3.7	113.0	0.108
TGL41-91	81.9	100.0	1.0	73.7	5.0	3.2	131.8	0.109
TGL41-91A	86.5	95.50	1.0	77.8	5.0	3.3	125.0	0.109
TGL41-100	90.0	110.0	1.0	81.0	5.0	1.46	144.0	0.109
TGL41-100A	95.0	105.0	1.0	85.5	5.0	1.53	137.0	0.109
TGL41-110	99.0	121.0	1.0	89.2	5.0	1.33	158.0	0.110
TGL41-110A	105.0	116.0	1.0	94.0	5.0	1.38	152.0	0.110
TGL41-120	108.0	132.0	1.0	97.2	5.0	1.21	173.0	0.110
TGL41-120A	114.0	126.0	1.0	102.0	5.0	1.27	165.0	0.110
TGL41-130	117.0	143.0	1.0	105.0	5.0	1.12	187.0	0.110
TGL41-130A	124.0	137.0	1.0	111.0	5.0	1.17	179.0	0.110
TGL41-150	135.0	165.0	1.0	121.0	5.0	0.98	215.0	0.111
TGL41-150A	143.0	158.0	1.0	128.0	5.0	1.01	207.0	0.111
TGL41-160	144.0	176.0	1.0	130.0	5.0	0.91	230.0	0.111
TGL41-160A	152.0	168.0	1.0	136.0	5.0	0.96	219.0	0.111
TGL41-170	153.0	187.0	1.0	138.0	5.0	0.86	244.0	0.111
TGL41-170A	162.0	179.0	1.0	145.0	5.0	0.90	234.0	0.111
TGL41-180	162.0	198.0	1.0	146.0	5.0	0.81	258.0	0.111
TGL41-180A	171.0	189.0	1.0	154.0	5.0	0.85	246.0	0.111
TGL41-200	180.0	220.0	1.0	162.0	5.0	0.73	287.0	0.111
TGL41-200A	190.0	210.0	1.0	171.0	5.0	0.77	274.0	0.111

NOTES:

- (1) V_(BR) measured after I_T applied for 300μs Ir-square wave pulse or equivalent
- (2) Surge current waveform per Figure 3 and derate per Fig.2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35
- (4) For bidirectional types having V_{WM} of 10 Volts and less, the I₀ limit is doubled

RATINGS AND CHARACTERISTIC CURVES TGL41-6.8A THRU TGL41-200CA

FIG. 1 - PEAK PULSE POWER RATING CURVE

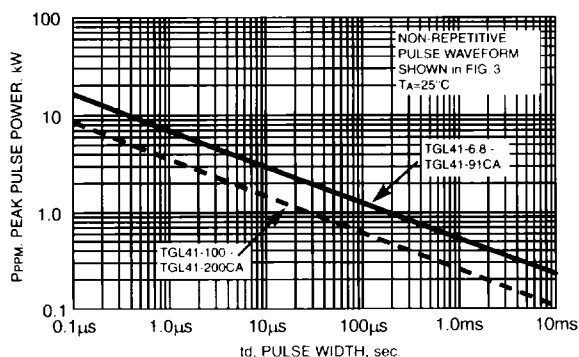


FIG. 2 - PULSE DERATING CURVE

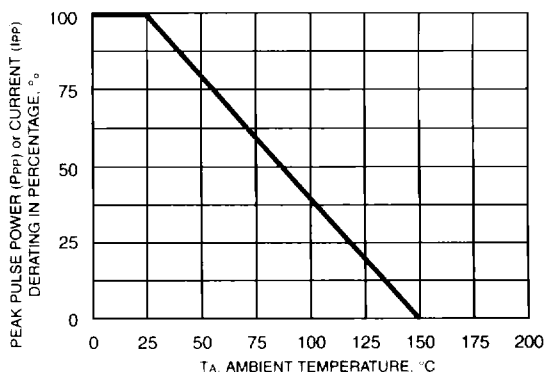


FIG. 3 - PULSE WAVEFORM

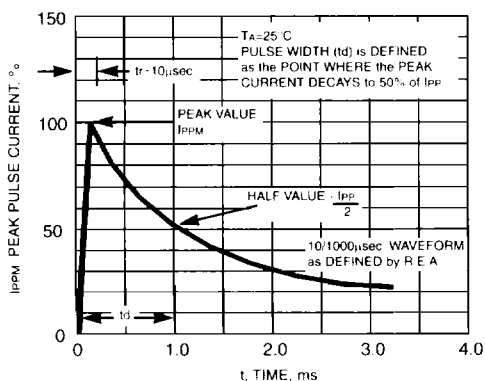


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

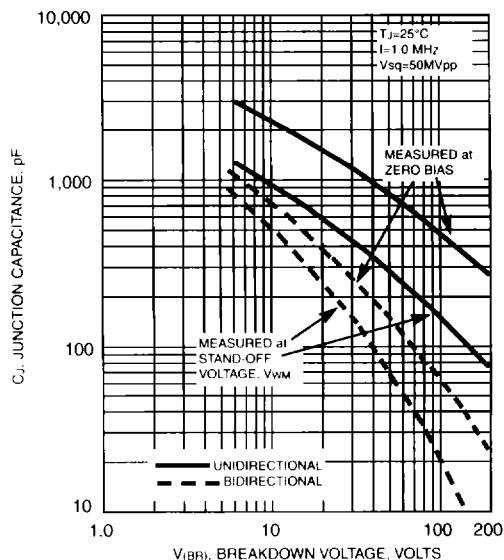


FIG. 5 - STEADY STATE POWER DERATING CURVE

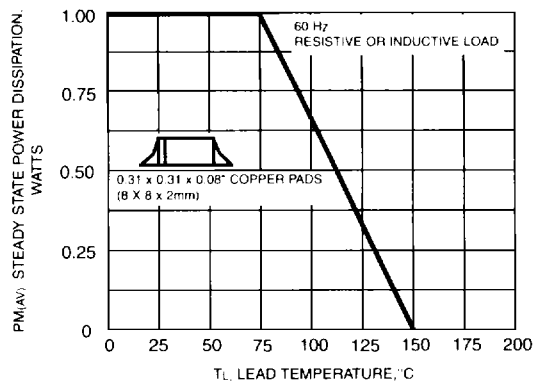


FIG. 6 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

