


Terminal Strips with Fixing Flanges or Snap-in Mounting Feet, Series 260

Side-entry

CAGE CLAMP®



1
17

0.08 – 1.5 mm²
400 V/6 kV/3 ①
18 A

AWG 28 – 16
300 V, 10 A ②
300 V, 15 A ③

Pole width 5 mm / 0.197 in
8 – 9 mm / 0.33 in

* ① VDE ② IEC ③ CCA ④ SAS ⑤ IEC ⑥ GL BV LR NV ⑦ ⑧ ⑨

2 x 0.08 – 1.5 mm²
400 V/6 kV/3 ①
18 A



2 x AWG 28 – 16
300 V, 10 A ②
300 V, 15 A ③

Pole width 8 mm / 0.315 in
8 – 9 mm / 0.33 in


* ① VDE ② IEC ③ CCA ④ SAS ⑤ IEC ⑥ GL BV LR NV ⑦ ⑧ ⑨

- ① 400 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(see also section 10)


- ② For longer strips and/or assemblies of different colors, please contact factory

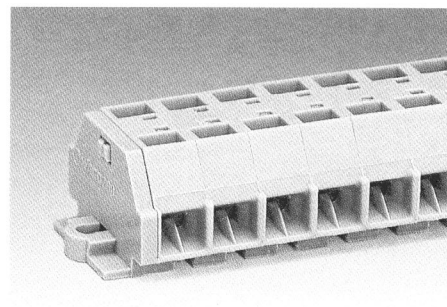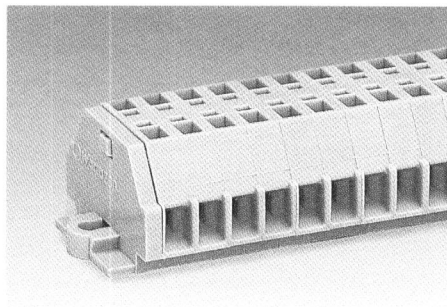

Description

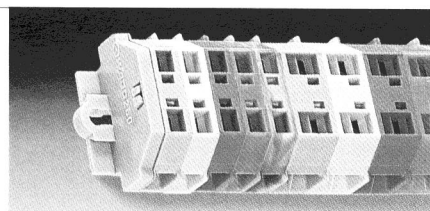

Terminal strips with fixing flanges,
for screw fixing or similar methods,
fixing hole diameter 3.2 mm
(with mounting adapter 209-123 also for DIN 35 rail)

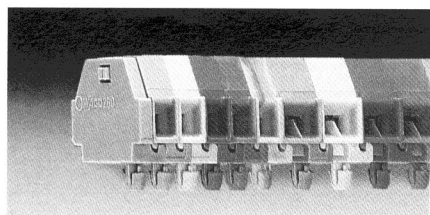

Terminal strips with snap-in mounting feet,
for plate thickness 0.6 – 1.2 mm, fixing hole diameter
3.5 mm (fits aluminum rail 210-154
or with mounting adapter 209-120 for DIN 35 rail)

No. of poles Item-No. Pack.-unit pcs

2-conductor terminal strips with fixing flanges,

grey

2	260-102	100
3	260-103	100
4	260-104	100
5	260-105	100
6	260-106	50
7	260-107	50
8	260-108	50
9	260-109	50
10	260-110	25
11	260-111	25
12 ②	260-112	25

2-conductor terminal strips with snap-in mounting feet, grey

2	260-152	100
3	260-153	100
4	260-154	100
5	260-155	100
6	260-156	50
7	260-157	50
8	260-158	50
9	260-159	50
10	260-160	25
11	260-161	25
12 ②	260-162	25

No. of poles Item-No. Pack.-unit pcs

4-conductor terminal strips with fixing flanges,

grey

2	260-202	100
3	260-203	100
4	260-204	100
5	260-205	100
6	260-206	50
7	260-207	50
8	260-208	50
9	260-209	50
10	260-210	25
11	260-211	25
12 ②	260-212	25



4-conductor terminal strips with snap-in mounting feet, grey

2	260-252	100
3	260-253	100
4	260-254	100
5	260-255	100
6	260-256	50
7	260-257	50
8	260-258	50
9	260-259	50
10	260-260	25
11	260-261	25
12 ②	260-262	25

Dimensions for modular terminal blocks and terminal strips (in mm)

Modular terminal blocks and terminal strips with fixing flanges



L = No. of poles x pole width
L₁ = L + 8.1 mm
L₂ = L + 14.5 mm

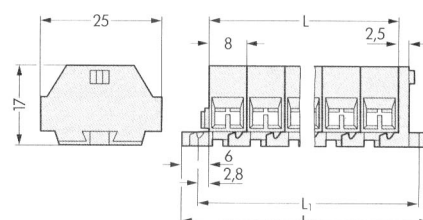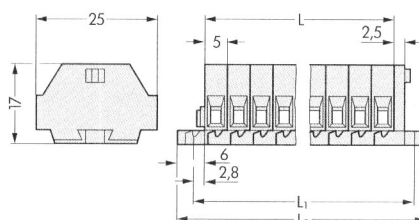

Modular terminal blocks and terminal strips with snap-in mounting feet

③ End terminal block; see page 1.16

L = (No. of poles x pole width) + 4.4 mm

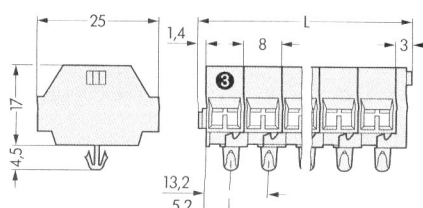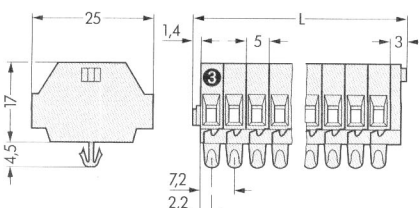

WAGO®