


Ultrafast Plastic Rectifier

Major Ratings and Characteristics

| | |
|--------------------|---------------|
| $I_{F(AV)}$ | 4.0 A |
| V_{RRM} | 400 V & 600 V |
| I_{FSM} | 150 A |
| t_{rr} | 50 ns |
| V_F | 1.05 V |
| $T_j \text{ max.}$ | 175 °C |

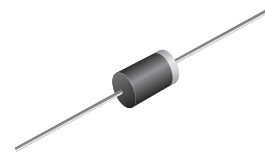

DO-201AD

Features

- Glass passivated chip junction
- Ultrafast reverse recovery time
- Low forward voltage drop
- Low leakage current
- Low switching losses, high efficiency
- High forward surge capability
- Solder Dip 260 °C, 40 seconds



Typical Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and Telecommunication

Mechanical Data

Case: DO-201AD

Epoxy meets UL-94V-0 Flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: Color band denotes cathode end

Maximum Ratings

$T_A = 25\text{ °C}$ unless otherwise specified

| Parameter | Symbol | MUR440 | MUR460 | Unit |
|--|----------------|---------------|--------|------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 400 | 600 | V |
| Working peak reverse voltage | V_{RWM} | 400 | 600 | V |
| Maximum DC blocking voltage | V_{DC} | 400 | 600 | V |
| Maximum average forward rectified current (See figure 1) | $I_{F(AV)}$ | 4.0 | | A |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load | I_{FSM} | 150 | | A |
| Operating junction and storage temperature range | T_J, T_{STG} | - 65 to + 175 | | C |

Electrical Characteristics

$T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Parameter | Test condition | Symbol | MUR440 | MUR460 | Unit |
|---|---|----------|----------------------|--------|---------------|
| Maximum instantaneous forward voltage ⁽¹⁾ | at 3.0 A, $T_J = 150\text{ }^\circ\text{C}$ at 3.0 A, $T_J = 25\text{ }^\circ\text{C}$ at 4.0 A, $T_J = 25\text{ }^\circ\text{C}$ | V_F | 1.05 1.25 1.28 | | V |
| Maximum instantaneous reverse current at rated DC blocking voltage ⁽¹⁾ | $T_J = 25\text{ }^\circ\text{C}$ $T_J = 150\text{ }^\circ\text{C}$ | I_R | 10 250 | | μA |
| Max. reverse recovery time | $I_F = 0.5$, $I_R = 1.0$ A, $I_{rr} = 0.25$ A | t_{rr} | 50 | | ns |
| Maximum reverse recovery time | at, $I_F = 1.0$ A, $di/dt = 50$ A/ μs , $V_R = 30$ V, $I_{rr} = 10\%$ I_{RM} | t_{rr} | 75 | | ns |
| Maximum forward recovery time | $I_F = 1.0$ A, $di/dt = 100$ A/ μs , Rec. to 1.0 V | t_{fr} | 50 | | ns |

Notes:

(1) Pulse test: $t_p = 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

Thermal Characteristics

$T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Parameter | Symbol | MUR440 | MUR460 | Unit |
|---|-----------------|--------|--------|---------------------------|
| Typical thermal resistance junction to ambient ⁽¹⁾ | $R_{\theta JA}$ | 28 | | $^\circ\text{C}/\text{W}$ |

Notes:

(1) Lead length = 1/2" on P.C. board with 1.5" x 1.5" copper surface

Ratings and Characteristics Curves

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

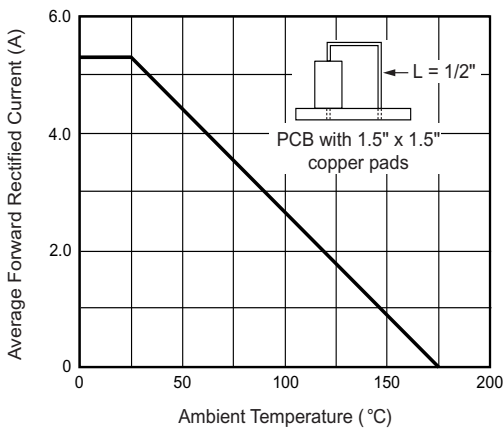


Figure 1. Forward Current Derating Curve

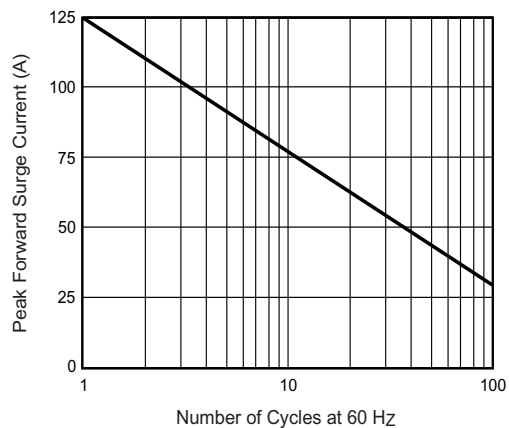


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

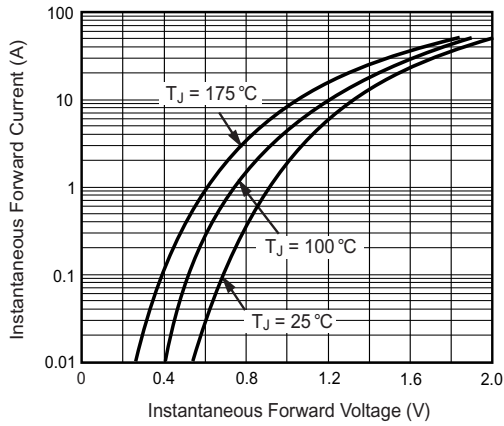


Figure 3. Typical Instantaneous Forward Characteristics

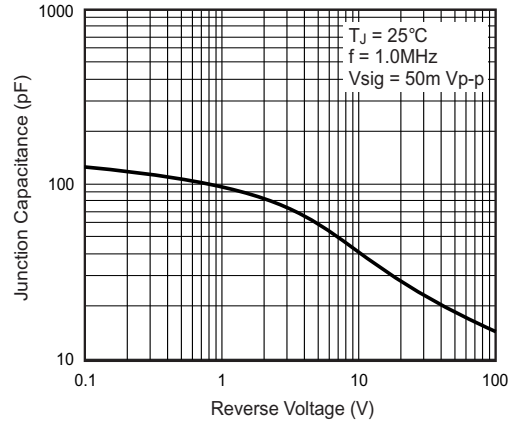


Figure 5. Typical Junction Capacitance per Leg


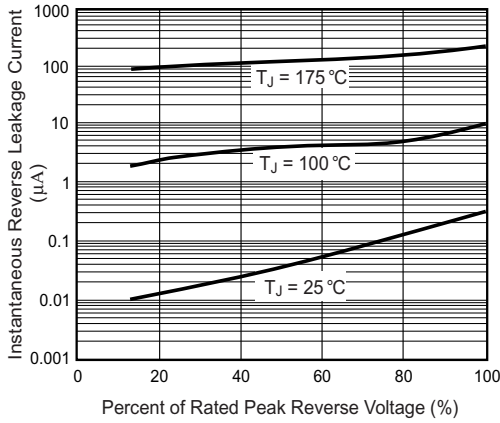


Figure 4. Typical Reverse Characteristics

Package outline dimensions in inches (millimeters)



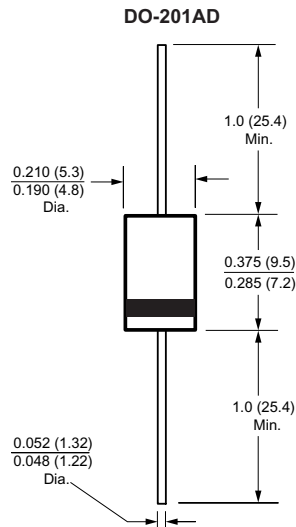

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.