

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du Propriete de c FCI. Droits de reproduction FCI.



FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


PRODUCT NO.
10007221-001/001LF
10007221-002/002LF

DATE CODE: YY- YEAR; WW- WEEK
EXAMPLES: 0235



WEEK 35
YEAR 2002

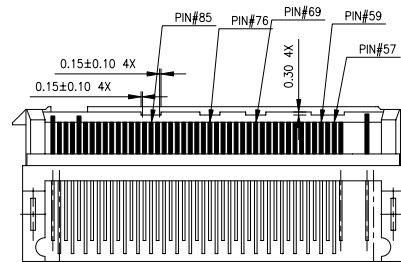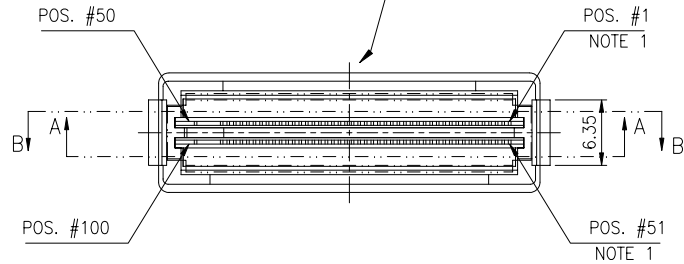



SECTION A-A
(FOR 10007221-002/002LF ONLY)

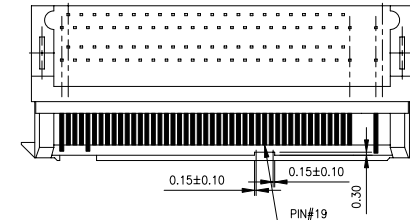

SECTION B-B
(FOR 10007221-002/002LF ONLY)

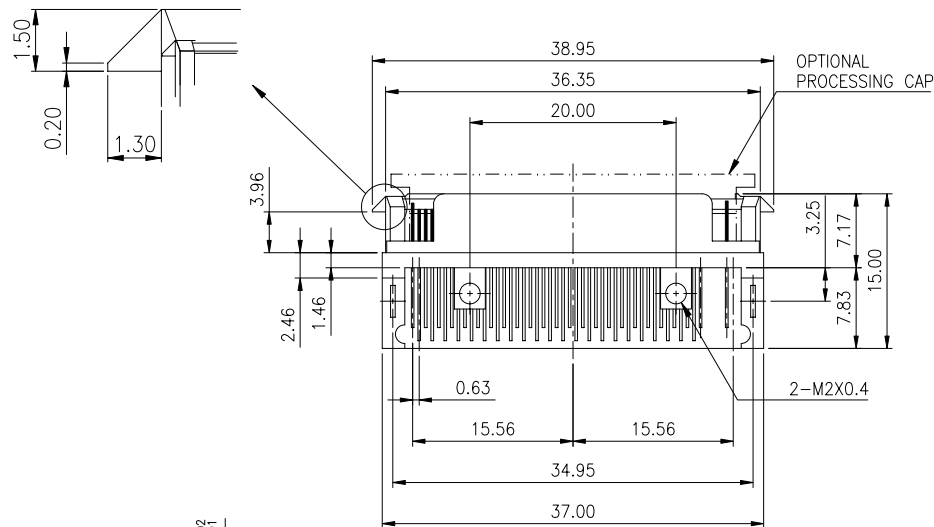



DETAIL OF HOLD DOWNS

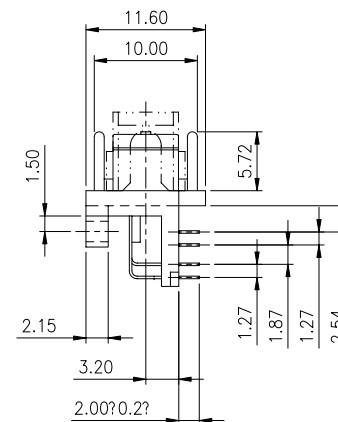

*. HOLD DOWN REMOVED FOR CLARIFY

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		A FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.3			projection		title	MICROPAX 100P R/A PLUG
A	T20223	TAI	07/11/'02		.XX ± 0.13						
B	T03-0096	FU	03/19/'03		.XXX ± 0.05						
C	T04-0197	RC	05/05/04	angles	±				MM/INCH	product family MICROPAX	code
D	T04-0256	RC	06/14/04	dr	KENNY TAI	07/11/'02					
E	N04-0107	PH	11/26/04	enrg	KENNY TAI	07/11/'02					
F	N05-0050	PH	2/22/05	chr	KENNY TAI	07/11/'02	scale ---	A3	size dwg no 10007221	sheet 1 of 2	
				appd	KENNY TAI	07/11/'02					
sheet index	revision sheet	F 1	F 2								

PRODUCT NO.
10007221

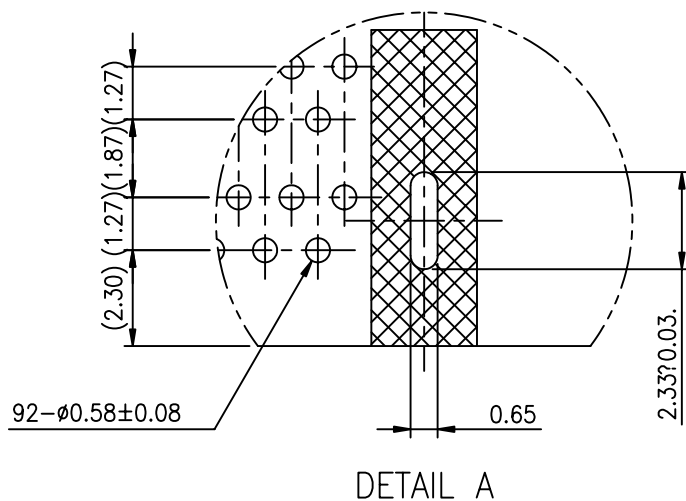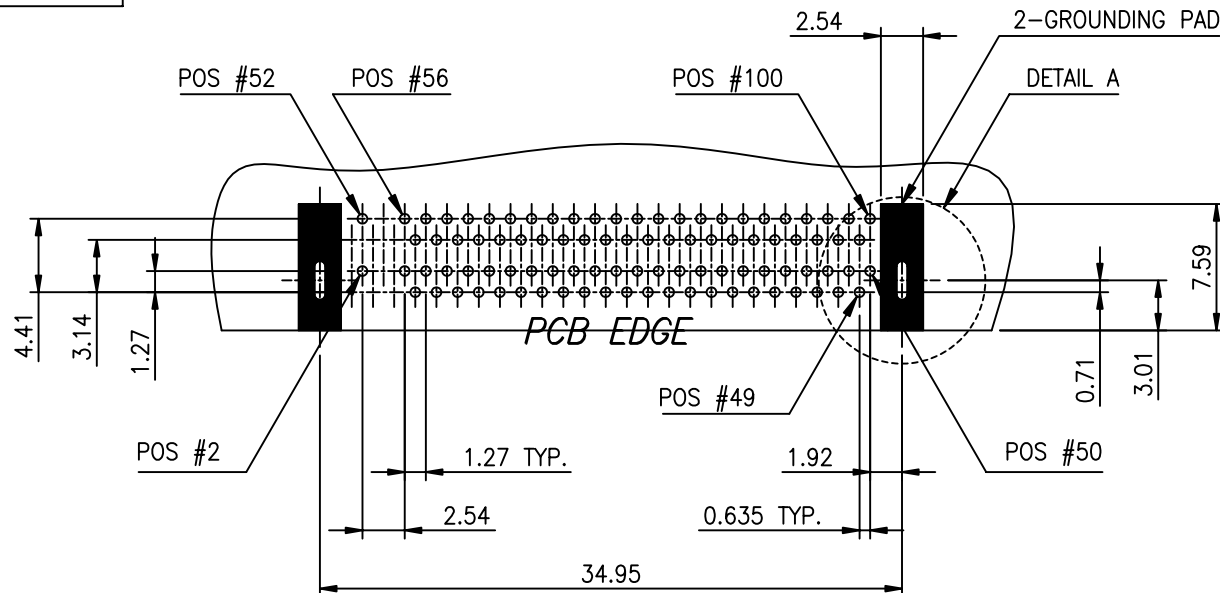

NOTE:

- PIN 1, 3, 4, 5, 51, 53, 54, 55 ARE REMOVED.
- FMLB PINS ARE 2, 6, 50, 52, 96 & 100.
- ALL SOLDER TAILS TO BE $\Phi 0.20 \text{ M}$
- ALL BOARD HOLES ARE $\Phi 0.15 \text{ M}$
- MATERIAL:
 - METAL FRAME: ZINC ALLOY
 - INSULATOR: HIGH TEMPERATURE ENGINEERING PLASTIC
 - CONTACT : PHOSPHOR BRONZE
- PLATING :
 - METAL FRAME: NICKEL OVERALL.
 - CONTACT: 30u" GXT ON MATING AREA, TIN/LEAD ON SOLDER TAILS; ALL OVER NICKEL UNDER PLATED.
- P/N WITH SUFFIX "LF" MEAN A LEAD FREE P/N FOR LEAD FREE P/N, CONTACT SOLDER TAIL PLATING IS PURE TIN
- PACKING STANDARD GS-14-920 WILL BE APPLIED FOR LEAD FREE P/N'S
- FOR LEAD FREE P/N'S, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
- FOR LEAD FREE P/N'S, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRO-RED OR VAPOR PHASE REFLOW OVEN.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		A FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.3	projection	title	product family	code
F					.XX ± 0.13				
					.XXX ± 0.05				
				angles	±	MM/INCH	MICROPAX 100P R/A PLUG	MICROPAX	code
				dr	KENNY TAI 07/11/02				
				enr	KENNY TAI 07/11/02				
				chr	KENNY TAI 07/11/02	scale	A3	10007221	sheet 2 of
				appd	KENNY TAI 07/11/02				
sheet index	revision sheet								