

# TRIAC(Through Hole / Isolated)

# TMG40C60J


**SanRex** Triac TMG40C60J is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

### Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

### Features

- $I_{T(RMS)}=40A$
- High Surge Current
- Lead-Free Package

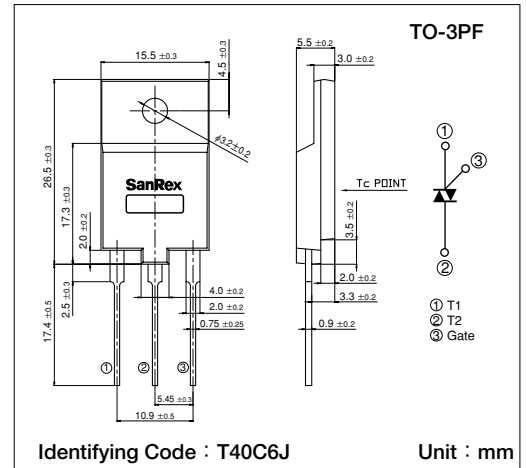

### Maximum Ratings

(Tj=25°C unless otherwise)


Symbol	Item	Reference	Ratings	Unit
V <sub>DRM</sub>	Repetitive Peak Off-State Voltage		600	V
I <sub>T(RMS)</sub>	R.M.S. On-State Current	T <sub>c</sub> =73°C	40	A
I <sub>TSM</sub>	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	380/420	A
I <sup>2</sup> t	I <sup>2</sup> t (for fusing)		730	A <sup>2</sup> S
P <sub>GM</sub>	Peak Gate Power Dissipation		10	W
P <sub>G(AV)</sub>	Average Gate Power Dissipation		1	W
I <sub>GM</sub>	Peak Gate Current		3	A
V <sub>GM</sub>	Peak Gate Voltage		10	V
V <sub>ISO</sub>	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500	V
T <sub>j</sub>	Operating Junction Temperature		-40 ~ +125	°C
T <sub>stg</sub>	Storage Temperature		-40 ~ +150	°C
	Mass		5.6	g

### Electrical Characteristics


(Tj=25°C unless otherwise)

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
I <sub>DRM</sub>	Repetitive Peak Off-State Current	V <sub>D</sub> =V <sub>DRM</sub> , Single phase, half wave, T <sub>j</sub> =125°C			5	mA	
V <sub>TM</sub>	Peak On-State Voltage	I <sub>T</sub> =60A, Inst. measurement			1.4	V	
I <sub>GT1</sub> <sup>+</sup>	Gate Trigger Current	V <sub>D</sub> =6V, R <sub>L</sub> =10Ω			50	mA	
I <sub>GT1</sub> <sup>-</sup>					50		
I <sub>GT3</sub> <sup>+</sup>					—		
I <sub>GT3</sub> <sup>-</sup>					50		
V <sub>GT1</sub> <sup>+</sup>	Gate Trigger Voltage					1.5	V
V <sub>GT1</sub> <sup>-</sup>						1.5	
V <sub>GT3</sub> <sup>+</sup>						—	
V <sub>GT3</sub> <sup>-</sup>						1.5	
V <sub>GD</sub>	Non-Trigger Gate Voltage	T <sub>j</sub> =125°C, V <sub>D</sub> =½V <sub>DRM</sub>	0.2			V	
[dv/dt] <sub>c</sub>	Critical Rate of Rise of Off-State Voltage at Commutation	T <sub>j</sub> =125°C, [di/dt] <sub>c</sub> =-20A/ms, V <sub>D</sub> =⅔V <sub>DRM</sub>	10			V/μs	
I <sub>H</sub>	Holding Current			30		mA	
R <sub>th</sub>	Thermal Resistance	Junction to case			1.1	°C/W	


Trigger mode of the triac

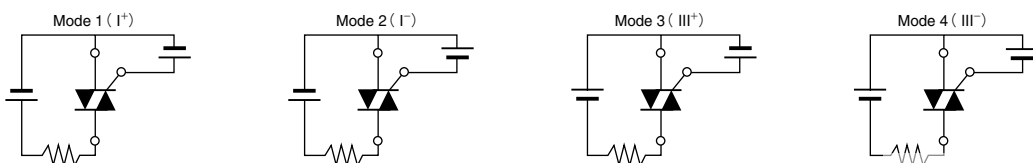


**Gate Characteristics**

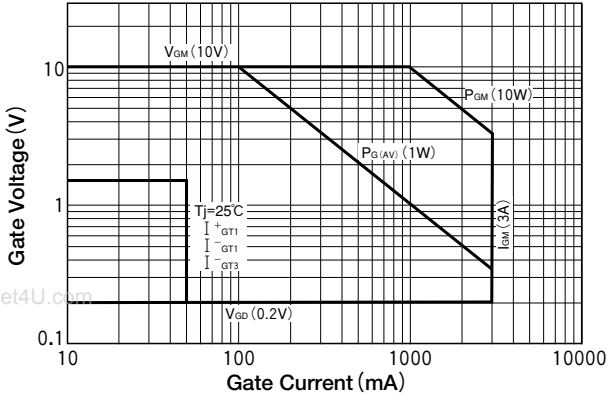


**On-State Characteristics**

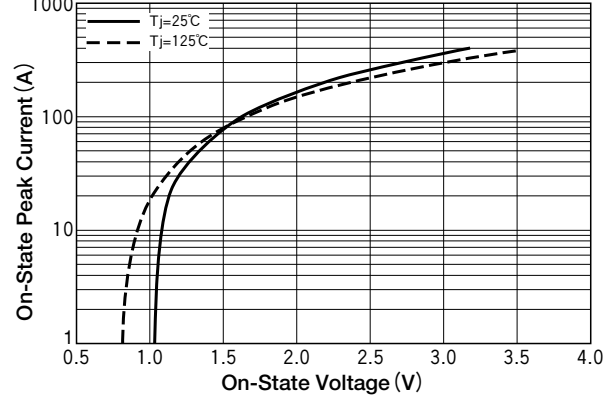


**R.M.S. On-State Current vs Maximum Power Dissipation**

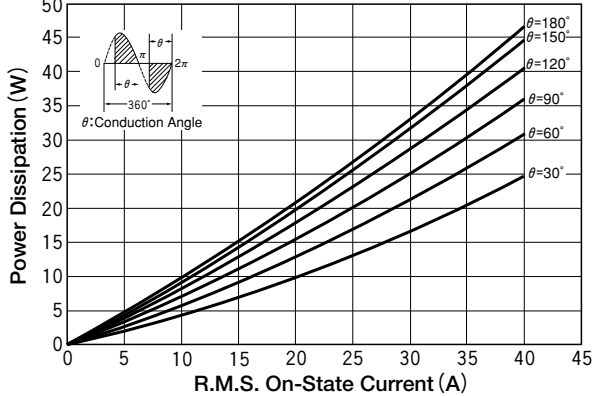


**R.M.S. On-State vs Allowable Case Temperature**

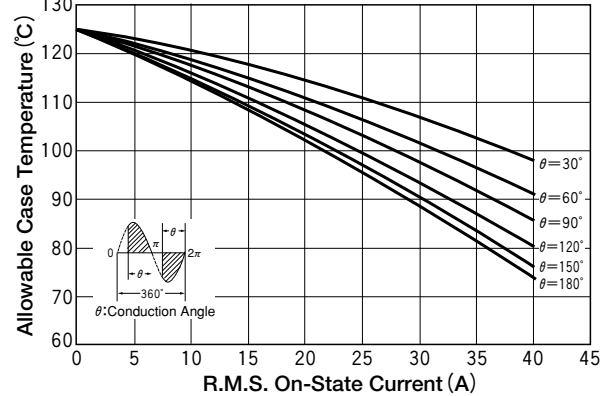


**Surge On-State Current Rating (Non-Repetitive)**

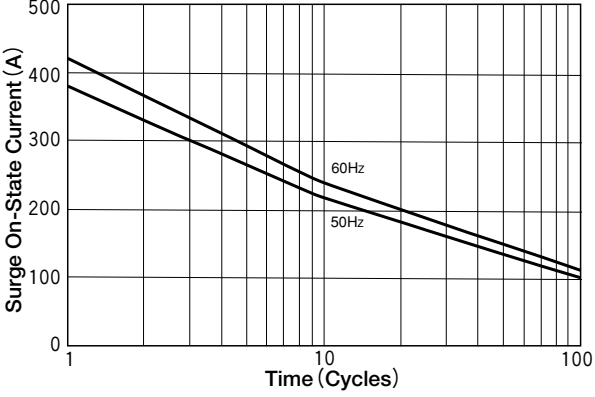

**Transient Thermal Impedance**

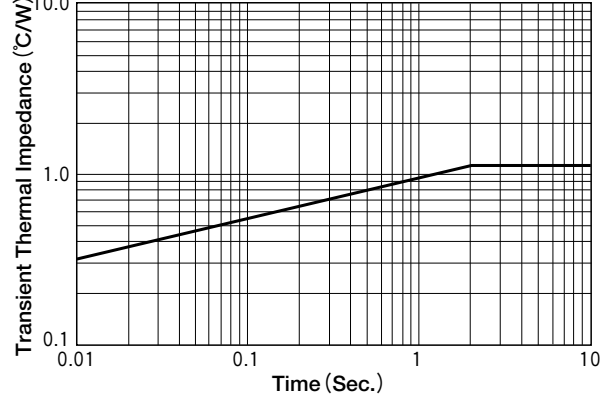

**I<sub>GT</sub> - T<sub>J</sub> (Typical)**

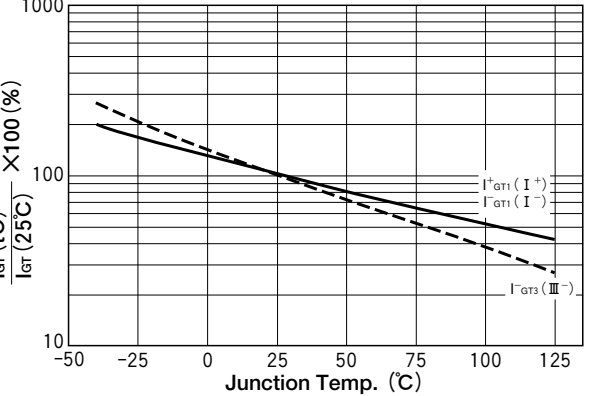

**V<sub>GT</sub> - T<sub>J</sub> (Typical)**

