


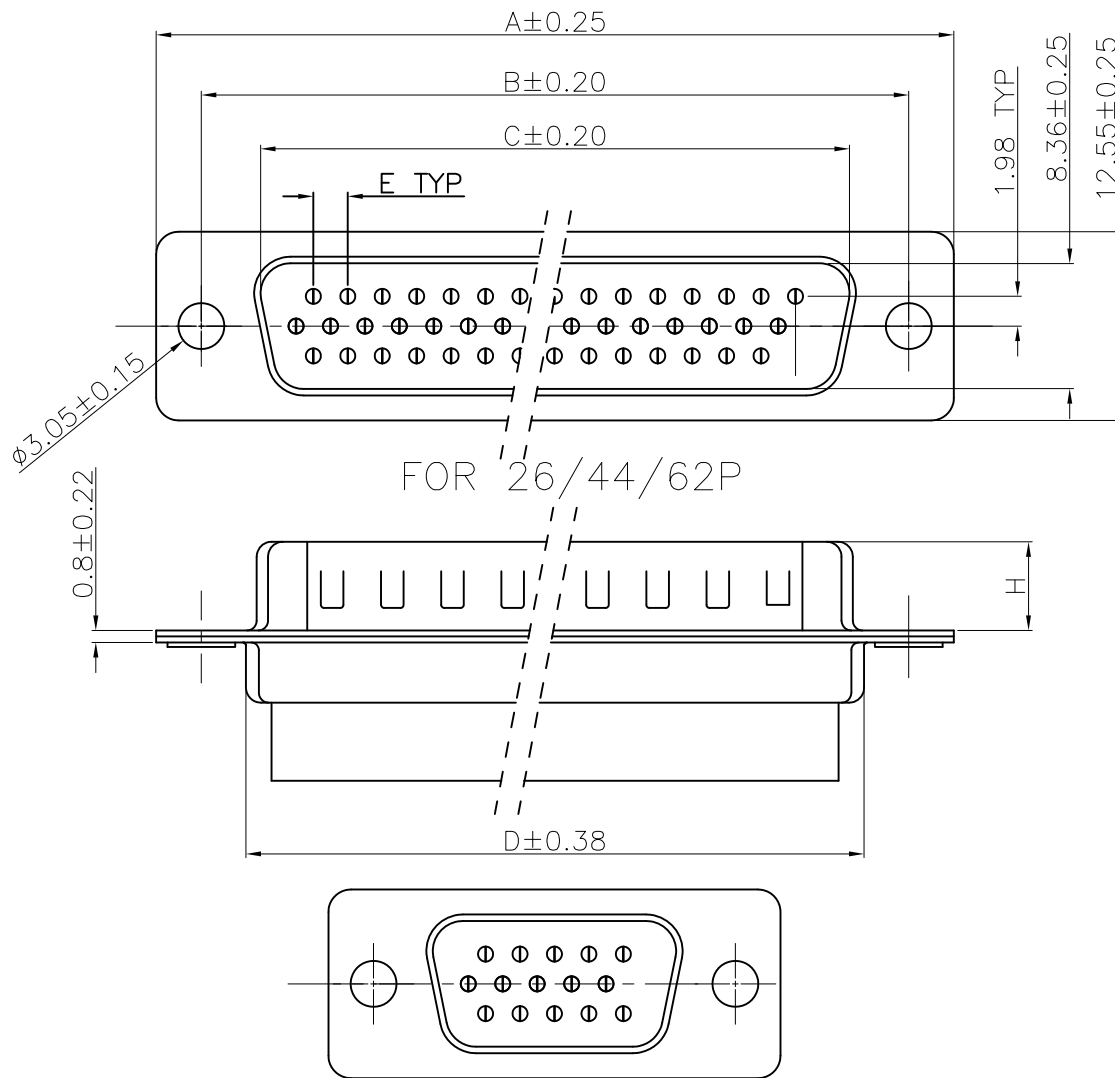


FOR 15P

POS.	PART NO.	A	B	C	D	E	H
15	10090930-P150ALF	30.81	24.99	16.92	19.10	2.29	5.90 ^{+0.25}
26	10090930-P260ALF	39.24	33.32	25.25	27.75	2.29	5.90 ^{+0.25}
44	10090930-P440ALF	53.04	47.04	38.96	41.30	2.29	5.70 ^{+0.25}
62	10090930-P620ALF	69.32	63.50	55.42	57.40	2.41	5.70 ^{+0.25}




REMARK:

1. CHARACTERISTICS:
OPERATING TEMPERATURE RANGE: -55° C~105° C
2. MATERIAL:
INSULATORS: THERMOPLASTIC G.F(UL94V-0) BLACK
SHELL: CARBON STEEL, 100u" Min NICKEL TIN TOP OVER,
50u" Min COPPER UNDER PLATE.
STOPPER: CARBON STEEL.
3. PART NUMBER DESCRIPTION: **10090930-P XX X X LF**
- | | | | | |
|--------------------|----|---|---|------------------------|
| SERIES NO. | XX | X | X | LF |
| TYPE | | | | LF: ROHS COMPLIANT |
| P: PIN (MALE) | | | | FLANGE MOUNTING OPTION |
| | | | | A: STANDARD HOLE |
| NUMBER OF CONTACTS | | | | |
| 15: 15-PIN | | | | |
| 26: 26-PIN | | | | |
| 44: 44-PIN | | | | |
| 62: 62-PIN | | | | |
| | | | | CONTACT FINISH |
| | | | | O: NO CONTACT |

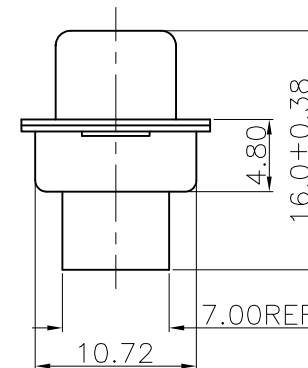[illegible]




PART NO.: 10090930-P780ALF

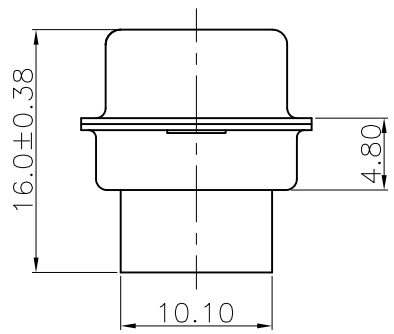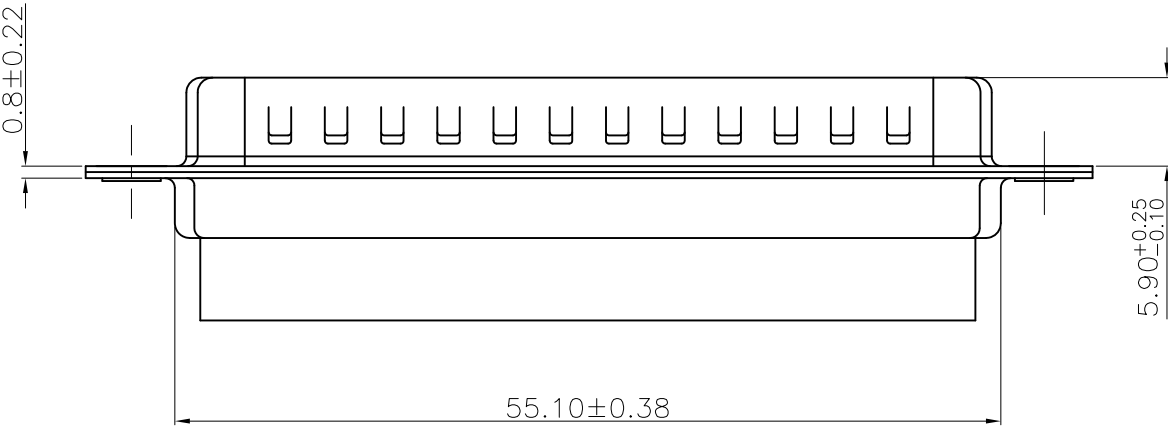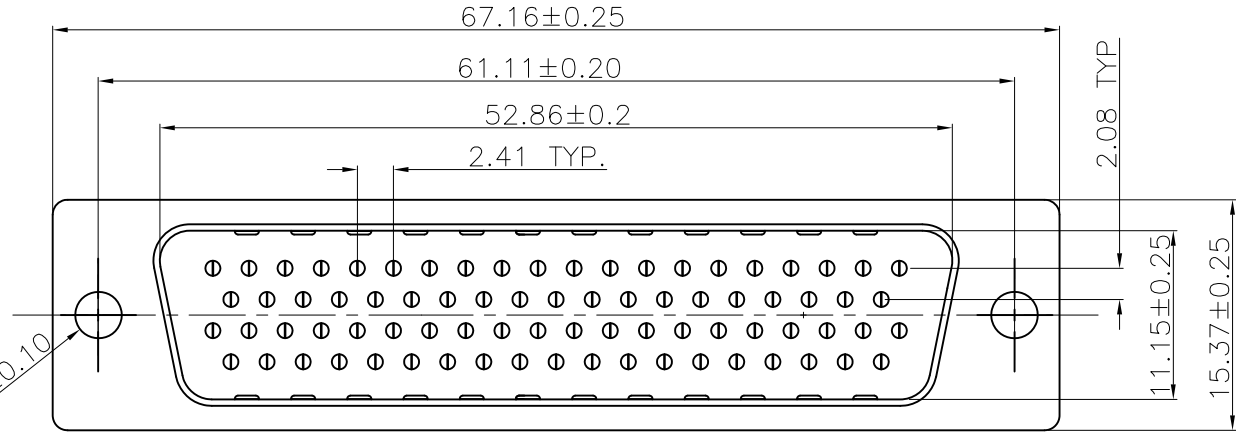

REMARK:
 1. CHARACTERISTICS:
 OPERATING TEMPERATURE RANGE: -55° C~105° C
 2. MATERIAL:
 INSULATORS: THERMOPLASTIC G.F(UL94V-0) BLACK
 SHELL: CARBON STEEL, 100u" Min NICKEL TIN TOP OVER, 50u" Min COPPER UNDER PLATE.
 STOPPER: CARBON STEEL.
 3. PART NUMBER DESCRIPTION: 10090930-P XX X X LF

SERIES NO. _____
 TYPE _____
 P: PIN (MALE)
 NUMBER OF CONTACTS _____
 78: 78-PIN

LF: ROHS COMPLIANT
 FLANGE MOUNTING OPTION
 A: STANDARD HOLE
 CONTACT FINISH
 0: NO CONTACT

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.38			projection	www.fciconnect.com	
A					.XX ± 0.25				title	HDEC 78P MALE CRIMPING
					.XXX ± 0.10					
				angles	0° ±2°					
				dr	JASON HSU	12/10/09	MM		product family D-SUB	
				engr	JASON HSU	12/10/09		scale	size dwg no	
				chr	GARY HSIEH	12/10/09	1:1		A4 10090930	
				appd	JOSEPH HSIA	12/10/09				
sheet index		revision sheet								