





- ▼ Simple Drive Requirement
- ▼ Low On-resistance
- ▼ Fast Switching Characteristics
- ▼ RoHS Compliant & Halogen-Free



BV_{DSS}	900V
$R_{DS(ON)}$	7.2Ω
I_D	1.9A



Description

Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-220 package is widely preferred for all commercial-industrial applications. The device is suited for DC-DC, AC-DC converters for power applications.

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	900	V
V_{GS}	Gate-Source Voltage	± 30	V
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$	1.9	A
$I_D @ T_C = 100^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$	1.2	A
I_{DM}	Pulsed Drain Current ¹	6	A
$P_D @ T_C = 25^\circ\text{C}$	Total Power Dissipation	62.5	W
	Linear Derating Factor	0.5	W/ $^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy ²	18	mJ
I_{AR}	Avalanche Current	1.9	A
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Value	Units
R_{thj-c}	Maximum Thermal Resistance, Junction-case	2	$^\circ\text{C}/\text{W}$
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient	62	$^\circ\text{C}/\text{W}$



AP02N90P-HF

Electrical Characteristics@ $T_j=25^\circ C$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=1mA$	900	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ C, I_D=1mA$	-	0.8	-	$V/^\circ C$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ³	$V_{GS}=10V, I_D=0.85A$	-	-	7.2	Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2	-	4	V
g_{fs}	Forward Transconductance	$V_{DS}=10V, I_D=1.9A$	-	2	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=900V, V_{GS}=0V$	-	-	10	μA
	Drain-Source Leakage Current ($T_j=125^\circ C$)	$V_{DS}=720V, V_{GS}=0V$	-	-	100	μA
I_{GSS}	Gate-Source Leakage	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	± 100	nA
Q_g	Total Gate Charge ³	$I_D=1.9A$	-	12	20	nC
Q_{gs}	Gate-Source Charge	$V_{DS}=540V$	-	2.5	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{GS}=10V$	-	4.7	-	nC
$t_{d(on)}$	Turn-on Delay Time ³	$V_{DD}=450V$	-	10	-	ns
t_r	Rise Time	$I_D=1.9A$	-	5	-	ns
$t_{d(off)}$	Turn-off Delay Time	$R_G=10\Omega, V_{GS}=10V$	-	18	-	ns
t_f	Fall Time	$R_D=236\Omega$	-	9	-	ns
C_{iss}	Input Capacitance	$V_{GS}=0V$	-	630	1000	pF
C_{oss}	Output Capacitance	$V_{DS}=25V$	-	40	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	4	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ³	$I_S=1.9A, V_{GS}=0V$	-	-	1.3	V
t_{rr}	Reverse Recovery Time ³	$I_S=1.9A, V_{GS}=0V,$ $dI/dt=100A/\mu s$	-	360	-	ns
Q_{rr}	Reverse Recovery Charge		-	1.8	-	μC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Starting $T_j=25^\circ C, V_{DD}=50V, L=10mH, R_G=25\Omega, I_{AS}=1.9A.$
- 3.Pulse test

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

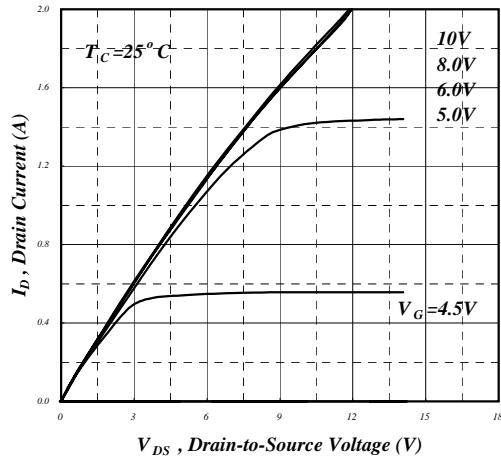


Fig 1. Typical Output Characteristics

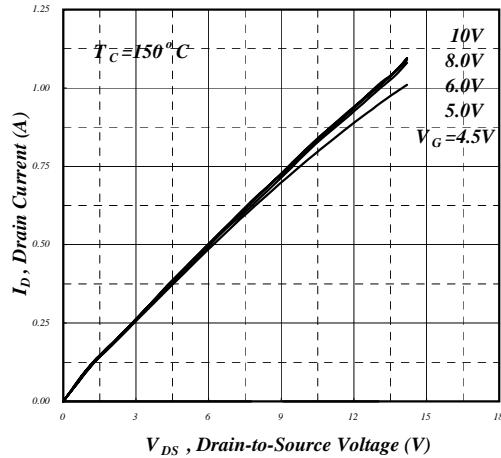


Fig 2. Typical Output Characteristics

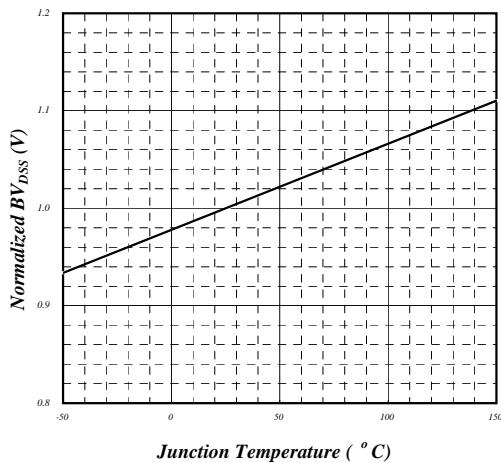
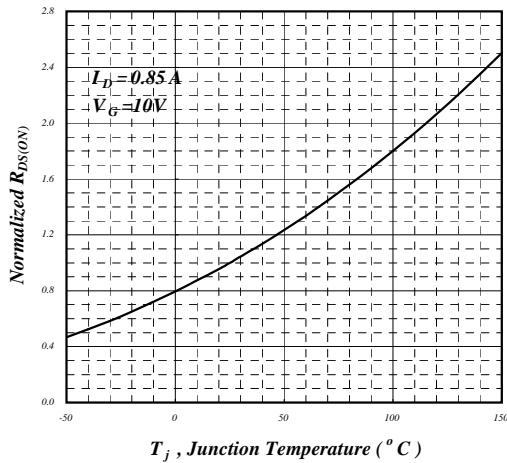
Fig 3. Normalized BV_{DSS} v.s. Junction Temperature

Fig 4. Normalized On-Resistance v.s. Junction Temperature

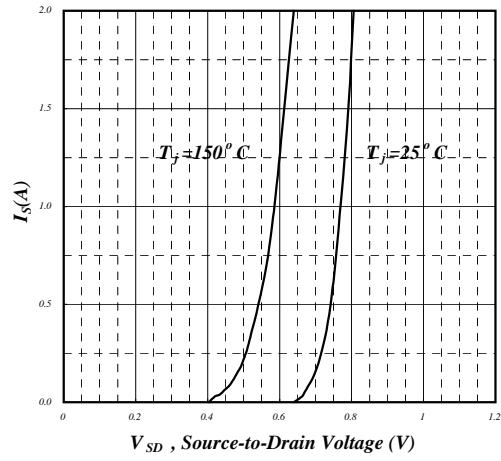


Fig 5. Forward Characteristic of Reverse Diode

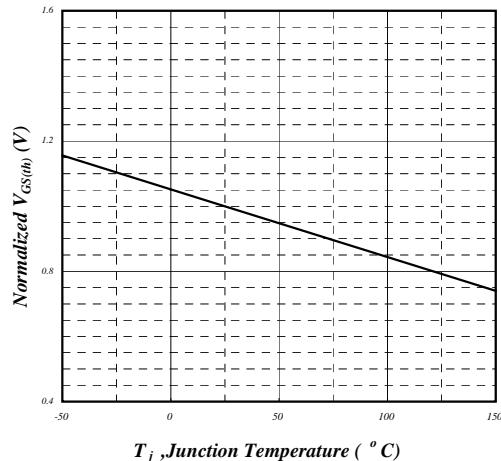


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

AP02N90P-HF

