



- Small Size
- Constant Current or Constant Voltage Versions
- Splash proof
- Conservative component ratings for long life

# LD12 Series

12W IP66  
Power Supplies

## Key Market Segments & Applications

LED Lighting  
Damp Environments

### LD12 Features and Benefits

#### Features

- IP66 Rated
- Vacuum Encapsulated
- Wide range AC Input

#### Benefits

- Can be used in wet applications
- Robust
- Supports global use

### Specifications

MODEL		LDC12	LDV12
ITEMS			
AC Input	VAC/Hz	90 - 264VAC, 47 - 63Hz	
Inrush Current (100/200VAC)	A	25 / 50A, 25°C ambient, cold start	
Input Current (110/200VAC)	A	0.28 / 0.18A	
Temperature Coefficient	-	<0.02%/°C (0 - 50°C)	
Overcurrent Protection	-	Automatic Recovery	> 105% of rated power
Overvoltage Protection	%	> 110%	
Turn on time	ms	< 200ms	
Leakage Current (265VAC 60Hz)	mA	0.25mA	
Efficiency	%	82% typical at full load	
Operating Temperature	-	-10 to +60°C (Guaranteed start up at -20°C)	
Storage Temperature	-	-30 to +85°C	
Operating Humidity (1)	-	15 - 90% RH	
Storage Humidity (1)	-	15 - 90% RH	
Cooling	-	Convection	
Withstand Voltage	-	Input to Output 3kVAC	
Isolation Resistance	-	>100M at 25°C & 70%RH, Input to Output at 500VDC	
Vibration (non operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> constant sweep 1 min X, Y, Z for 30 mins	
Shock	-	< 196.1 m/s <sup>2</sup> (20G)	
Immunity	-	IEC61000-4-2, -3, -4, -5, -6, -8, -11	
Safety Agency Approvals	-	UL1310 (Class 2), IEC61347-1, IEC61347-2-13, CE Mark	
Conducted & Radiated EMI	-	EN55015, EN55022, FCC Class B	
IP Class	-	IP66	
Weight (Typ)	g	84	
Size (LxWxH)	mm	90 x 34.5 x 21	
Warranty	yrs	3 Years	


(1) Non condensing



Model Selector

Model	CV/CC	Output Voltage (V)	Output Accuracy	Min. Output Current (A)	Output Current (A)	Maximum Average Power	Ripple & Noise
LDC12-36-R35	CC	3 - 36V	0.33 - 0.37A	-	0.35A	12.6W	-
LDC12-18-R70	CC	3 - 18V	0.66 - 0.735A	-	0.7A	12.6W	-
LDV12-12-1R0	CV	12	11.4 - 12.6V	0.1A	1A	12W	100mV
LDV12-15-R80	CV	15	14.25 - 15.75V	0.08A	0.8A	12W	100mV
LDV12-24-R50	CV	24	22.8 - 25.2V	0.05A	0.5A	12W	150mV

Outline Drawing LD12 Series

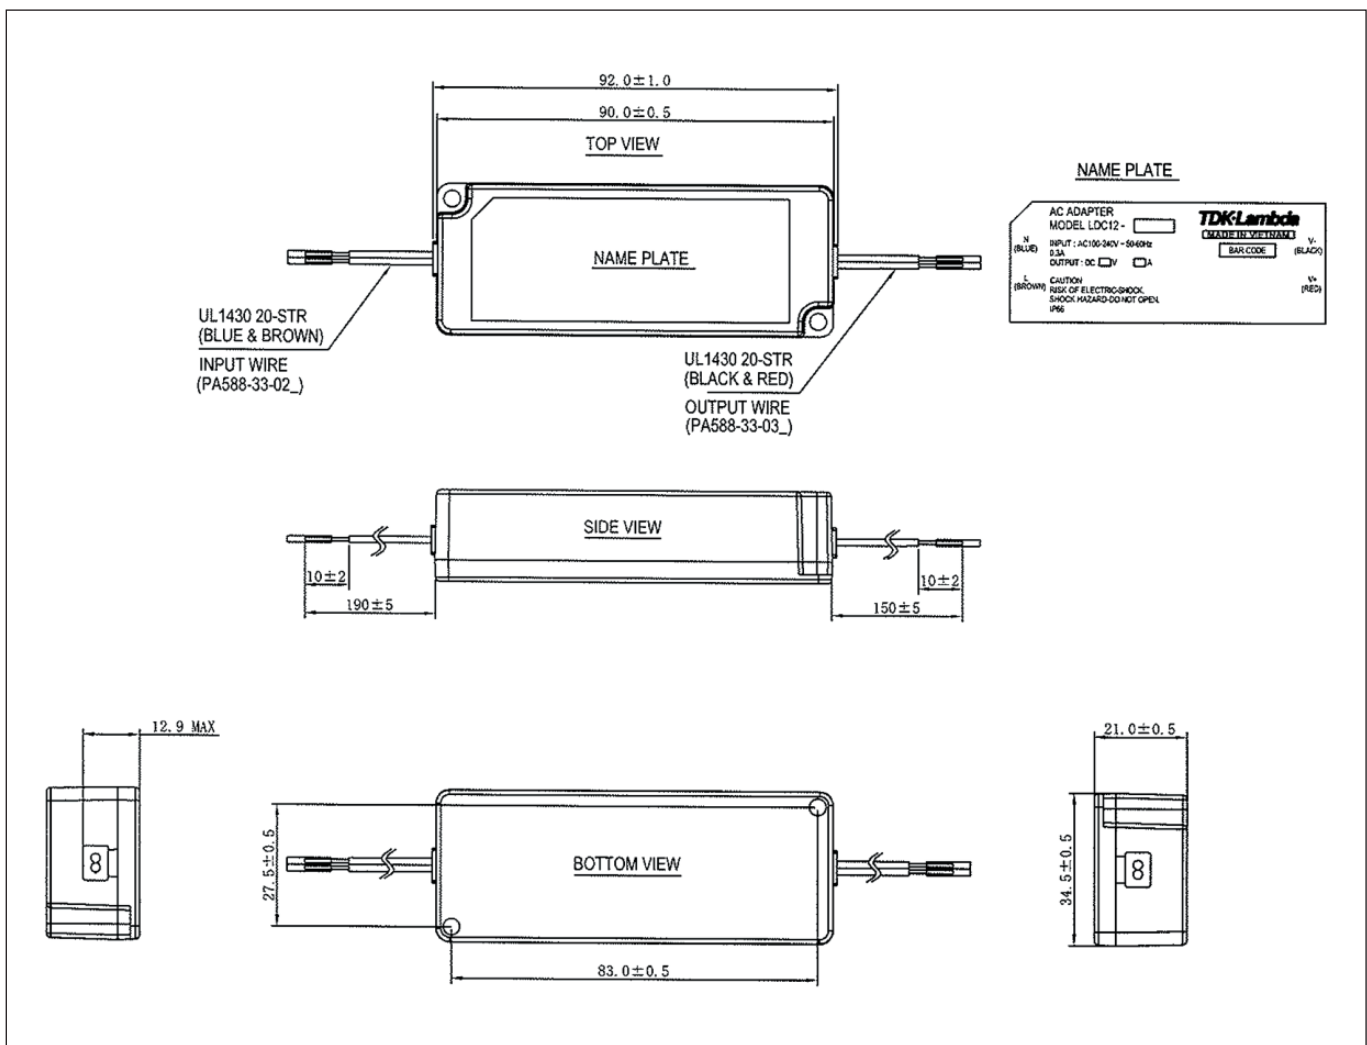

For full data and drawings please visit [www.emea.tdk-lambda.com/www/ld](http://www.emea.tdk-lambda.com/www/ld)





TDK-LAMBDA EMEA

www.emea-tdk-lambda.com



**TDK-Lambda France SAS**

ZAC des Delaches  
BP 1077-Gometz-le-Chatel  
91940 Les Ulis  
France  
Tel: +33 1 60 12 71 65  
Fax: +33 1 60 12 71 66  
france@fr.tdk-lambda.com  
www.fr.tdk-lambda.com



**TDK-Lambda Italy**

Via dei Lavoratori 128/130  
20092 Cinisello Balsamo (MI)  
Italy  
Tel: +39 02 61 29 38 63  
Fax: +39 02 61 29 09 00  
info.italia@it.tdk-lambda.com  
www.it.tdk-lambda.com



**TDK-Lambda Germany GmbH**

Karl-Bold-Strasse 40  
77855 Achern  
Germany  
Tel: +49 7841 666 0  
Fax: +49 7841 5000  
info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com



**TDK-Lambda UK Ltd.**

Kingsley Avenue  
Ilfracombe  
Devon EX34 8ES  
United Kingdom  
Tel: +44 (0) 12 71 85 66 66  
Fax: +44 (0) 12 71 86 48 94  
powersolutions@uk.tdk-lambda.com  
www.uk.tdk-lambda.com



**Austria Sales Office**

Aredstrasse 22  
2544 Leobersdorf  
Austria  
Tel: +43 2256 655 84  
Fax: +43 2256 645 12  
info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com



**Nemic Lambda Ltd.**

Kibbutz Givat  
Hashlosha 48800  
Israel  
Tel: +9 723 902 4333  
Fax: +9 723 902 4777  
info@nemic.co.il  
www.nemic.co.il

LOCAL DISTRIBUTION

