


HC-B 6-TMB-100/O1STM20G-EEE

Order No.: 1460361

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1460361>

HEAVYCON ADVANCE B6 sleeve housing, with bayonet locking (Allen screw), salt water resistant aluminum, height: 100 mm, with 1 x M20 thread, straight cable outlet, without surface; conductive seal (EMC properties)

Commercial data	
GTIN (EAN)	 4 046356 592215
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 568 (PC-2011)

Product notesWEEE/RoHS-compliant since:
07/02/2010

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	100 mm

Locking type	Bayonet locking
Fixing screws	M6
No. of cable exits	1
Cable exit	Straight
Pg screw connection	None
Type of the screw connection	1x M20
Degree of protection for housing	IP65/67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Seal material	NBR, conductive
Material lock	High-grade steel
Connection	If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding.

Accessories


Item	Designation	Description
Assembly		
1604641	HC-B-BF	Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking
1604654	HC-B-BF-SET	Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers

General

1690930	HC-B 6-TMB-SD-IP65	HEAVYCON ADVANCE IP65 protective cover B6, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm
---------	--------------------	--

Diagrams/Drawings

Dimensioned drawing

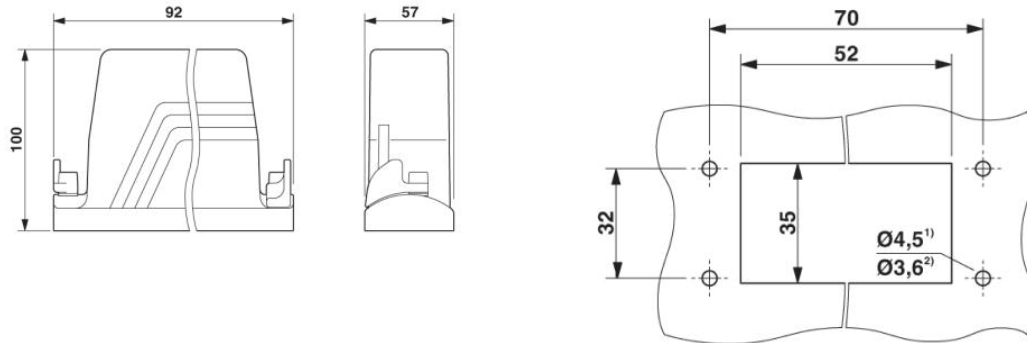

Mounting cutout

¹⁾ When M4 screws are used

²⁾ When self-tapping Torx screws are used
(Torx20, M4)

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;