

PHASE LOCKED OSCILLATOR

MODEL 613070 (5000 MHz)



Features

- Low Phase Noise: -127 dBc/Hz @ 100 KHz
- Low Spurious: -70 dBc Typical
- Internal Reference Design
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -20 °C to +70 °C
Frequency	5000 MHz	5000 MHz
Output Power (dBm)	+10	+9
Variation Over Temperature (dBm)	±0.75	±1
Spurious (dBc)	-70	-60
Phase Noise (dB)	-47 dBc/Hz @ 10 Hz -77 dBc/Hz @ 100 Hz -102 dBc/Hz @ 1 KHz -117 dBc/Hz @ 10 KHz -127 dBc/Hz @ 100 KHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-20
Lock Indicator	TTL (High=Locked)	TTL (Low=Unlocked)
Stability (ppm)	±1	±15
Storage Temperature	-55 °C	+125 °C
Supply Power DC	15	15
mA	150	160


Description

Spectrum Microwave's Series 600 Phase Locked Oscillators use a High "Q" Dielectric Resonator in the resonant circuit. The circuit is lightly loaded to obtain the lowest phase noise possible.

The resonator is screwed to a printed circuit board and well grounded to minimize modulation sidebands during shock and vibration.

Isolators are used to provide isolation from load VSWRs; Regulators filter noise on the DC input voltage.

External reference models are also available. A lock indicator circuit is provided to signal an out-of-lock condition.

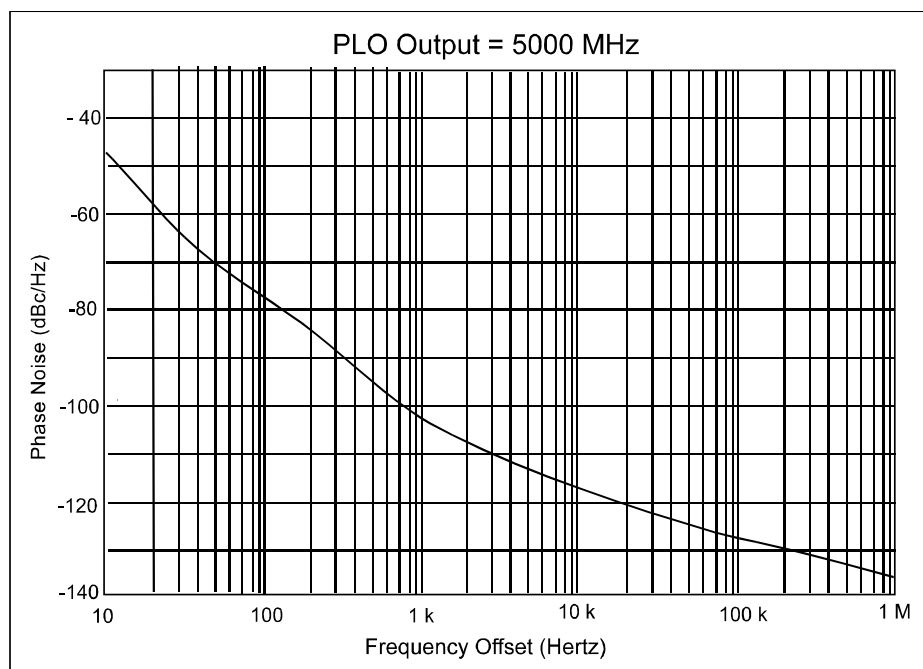

PHASE LOCKED OSCILLATOR

MODEL 613070 (5000 MHz)



Outline Drawing

