


# 7MM ADJUSTABLE RF COILS

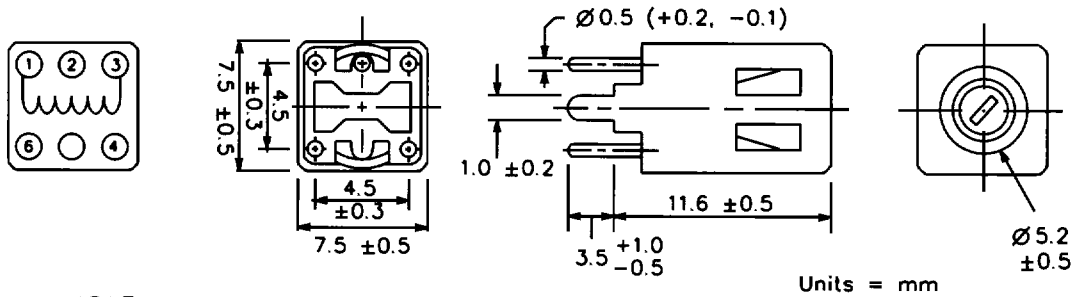

Style KS13XXN - with Plastic Sleeve

PART NUMBER	L Min (μH)	L Nom (μH)	L Max (μH)	TEST FREQ. (MHz)	Q MIN.	DCR Max. (ohms)
KS1346N	0.094	0.100	0.106	25.0	27	0.124
KS1347N	0.113	0.120	0.127	25.0	27	0.124
KS1348N	0.141	0.150	0.159	25.0	30	0.151
KS1349N	0.169	0.180	0.191	25.0	30	0.151
KS1350N	0.207	0.220	0.233	25.0	35	0.176
KS1351N	0.254	0.170	0.286	25.0	35	0.198
KS1352N	0.310	0.330	0.350	25.0	40	0.248
KS1353N	0.367	0.390	0.413	25.0	40	0.271
KS1354N	0.442	0.470	0.498	25.0	40	0.291
KS1355N	0.526	0.560	0.594	25.0	40	0.317
KS1356N	0.612	0.680	0.748	25.0	40	0.333
KS1357N	0.738	0.820	0.902	25.0	45	0.368
KS1358N	0.900	1.000	1.100	25.0	45	0.396
KS1359N	1.100	1.200	1.300	7.9	27	0.412
KS1360N	1.400	1.500	1.700	7.9	27	0.466
KS1361N	1.600	1.800	2.000	7.9	27	0.544
KS1362N	2.000	2.200	2.400	7.9	27	0.595
KS1363N	2.400	2.700	3.000	7.9	27	0.698
KS1364N	3.000	3.300	3.600	7.9	27	1.040
KS1365N	3.500	3.900	4.300	7.9	27	1.120
KS1366N	4.200	4.700	5.200	7.9	27	1.380
KS1367N	5.000	5.600	6.200	7.9	27	1.420
KS1368N	6.100	6.800	7.500	7.9	27	1.490
KS1369N	7.400	8.200	9.000	7.9	27	1.650
KS1370N	9.000	10.000	11.000	7.9	27	2.420
KS1371N	10.000	12.000	14.000	2.5	20	2.750
KS1372N	13.000	15.000	17.000	2.5	20	3.710
KS1373N	15.000	18.000	21.000	2.5	20	4.010
KS1374N	19.000	22.000	25.000	2.5	20	7.370
KS1375N	23.000	27.000	31.000	2.5	20	8.480
KS1376N	28.000	33.000	38.000	2.5	20	13.340
KS1377N	33.000	39.000	45.000	2.5	20	14.720
KS1378N	40.000	47.000	54.000	2.5	20	16.420
KS1379N	48.000	56.000	64.000	2.5	20	17.760
KS1380N	58.000	68.000	78.000	2.5	20	19.760
KS1381N	70.000	82.000	94.000	2.5	20	22.010
KS1382N	85.000	100.000	115.000	2.5	20	24.250