




# RJ45 MODULAR JACK WITH LED

## SERIES A20

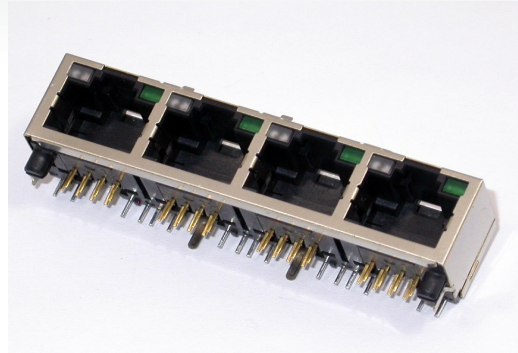

### FEATURES:

Combined functionality of series A00 RJ45 Cat.5 Jacks with the signal capabilities of independent LED's mounted within the jack housing

Each jack can have one or two LED's

LED's available as either a single color with matching colored lens, or as a bi-color variant that utilizes a clear lens

Bi-color LED's can be made to change color simply by reversing the voltage polarity

Custom LED color combinations are available, as well as, the selective loading of contacts, custom contact plating and special shielding

Right angle jacks can be made with a larger housing that allows custom specified filter components

### SPECIFICATIONS:

FCC Compliance: Part 68 Sub Part F

Insulator Housing: Black thermoplastic PBT or Nylon, UL 94V-0

Contact Material: Phosphor Bronze

Contact Plating: Gold Flash or Selective Gold Plating over Nickel


Contact Resistance: 20 milliohms maximum

Insulation Resistance: 500 MEGOHMS minimum

Current Rating: 1.5 Amps maximum

### Example Part Number:

**A20-108-261-310**

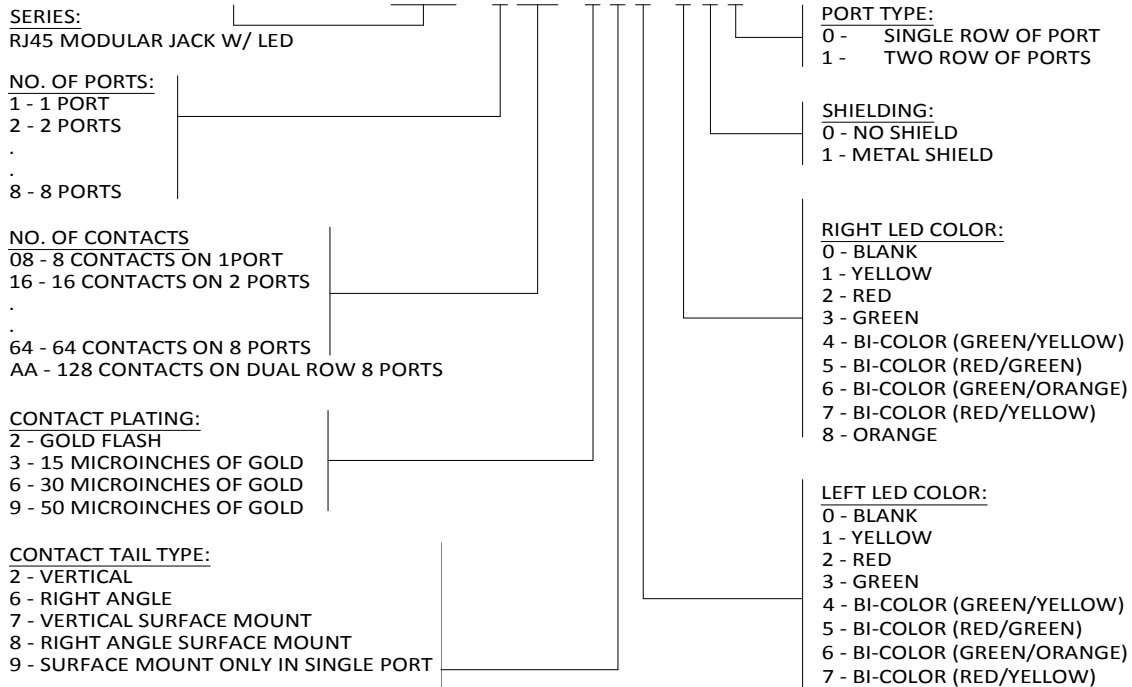

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## EDAC:

[A20-216-660-010](#) [A20-108-663-310](#) [A20-108-662-310](#) [A20-108-665-510](#) [A20-432-661-310](#) [A20-108-660-010](#) [A20-432-663-310](#) [A20-216-663-310](#) [A20-108-661-310](#) [A20-216-661-310](#) [A20-216-961-310](#) [A20-108-265-510](#) [A20-108-261-310](#) [A20-108-263-310](#) [A20-216-263-310](#) [A20-432-263-310](#) [A20-216-261-310](#) [A20-108-260-010](#) [A20-432-261-310](#) [A20-216-260-010](#) [A20-108-262-310](#) [A20-432-262-903](#) [A20-108-663-110](#) [A20-108-664-410](#) [A20-108-960-000](#)