

SURFACE MOUNT SUPER FAST RECTIFIER


Formosa MS

ES5A THRU ES5J

Reverse Voltage -50 to 600 Volts

Forward Current - 5.0 Amperes

SMC /DO-214AB

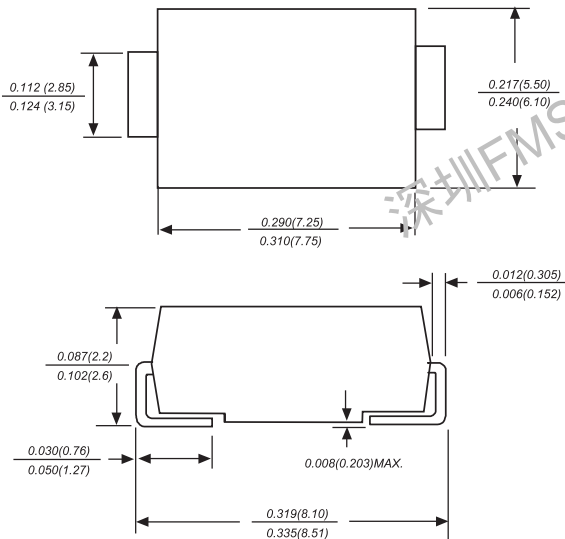

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Super fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.008 ounce, 0.217 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	ES5A	ES5B	ES5C	ES5D	ES5E	ES5G	ES5J	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	VOLTS
Maximum average forward rectified current at $T_L=55^\circ\text{C}$	$I_{(AV)}$	5.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200.0				150.0			Amps
Maximum instantaneous forward voltage at 5.0A	V_F	1.00				1.3	1.7		Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0				50.0			μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	35				ns			
Typical junction capacitance (NOTE 2)	C_J	180.0				pF			
Typical thermal resistance (NOTE 3)	R_{qJA}	40.0				$^\circ\text{C/W}$			
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$			

- Note:**
1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3. P.C.B. mounted with 0.6x0.6" (16x16mm) copper pad areas



SURFACE MOUNT SUPER FAST RECTIFIER
RATINGS AND CHARACTERISTIC CURVES ES5A THRU ES5J

Formosa MS

