

Features

- ◆ Ultra wide 4:1 input voltage
- ◆ I/O isolation 5000 VACrms rated for 250 working voltage
- ◆ 2 x MOPP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- ◆ Low leakage current <2 μ A
- ◆ Very high efficiency up to 88%
- ◆ Extended operating temperature range -40°C to 88°C at full load.
- ◆ Input filter to meet EN55022 class A
- ◆ 3-year product warranty



The THM-6WI series is a range of high performance, regulated 6 Watt DC/DC converters in a DIP-24 plastic package. The reinforced I/O-isolation system complies with the medical safety requirements for MOPP (Means Of Patient Protection). Together with a wide 4:1 input voltage range, and an internal EMI filter to meet EN55022 class A the converters constitute also a reliable solution for many demanding applications such as transportation systems, industrial control equipments, measurement equipments, and some IGBT driver applications. With A high efficiency of up to 88% and highest grade components the converters can reliably operate in an ambient temperature range of -40 up to $+88^{\circ}\text{C}$ at full load.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THM 6-0510WI	4.5 – 9 VDC (5 VDC nominal)	3.3 VDC	1800 mA	81.5 %
THM 6-0511WI		5.0 VDC	1200 mA	86.0 %
THM 6-0512WI		12 VDC	500 mA	86.0 %
THM 6-0513WI		15 VDC	400 mA	86.0 %
THM 6-0515WI		24 VDC	250 mA	87.0 %
THM 6-0521WI		± 5.0 VDC	± 600 mA	84.0 %
THM 6-0522WI		± 12 VDC	± 250 mA	86.5 %
THM 6-0523WI		± 15 VDC	± 200 mA	87.5 %
THM 6-2410WI	9 – 36 VDC (12 VDC nominal)	3.3 VDC	1800 mA	83.0 %
THM 6-2411WI		5.0 VDC	1200 mA	86.0 %
THM 6-2412WI		12 VDC	500 mA	89.0 %
THM 6-2413WI		15 VDC	400 mA	89.0 %
THM 6-2415WI		24 VDC	250 mA	88.5 %
THM 6-2421WI		± 5.0 VDC	± 600 mA	85.0 %
THM 6-2422WI		± 12 VDC	± 250 mA	88.5 %
THM 6-2423WI		± 15 VDC	± 200 mA	88.0 %
THM 6-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	1800 mA	82.5 %
THM 6-4811WI		5.0 VDC	1200 mA	86.5 %
THM 6-4812WI		12 VDC	500 mA	88.0 %
THM 6-4813WI		15 VDC	400 mA	88.5 %
THM 6-4815WI		24 VDC	250 mA	88.0 %
THM 6-4821WI		± 5.0 VDC	± 600 mA	85.0 %
THM 6-4822WI		± 12 VDC	± 250 mA	88.0 %
THM 6-4823WI		± 15 VDC	± 200 mA	88.0 %

Input Specifications

Input current at no load	5 Vin models:	20 mA typ.
	24 Vin models:	6 mA typ.
	48 Vin models:	4 mA typ.
Start-up voltage / under voltage shut down	5 Vin models:	4.5 VDC / 4.0 VDC typ.
	24 Vin models:	9.0 VDC / 8.0 VDC typ.
	48 Vin models:	18 VDC / 16 VDC typ.
Surge voltage (1 sec. max.)	5 Vin models:	16 VDC max.
	24 Vin models:	50 VDC max.
	48 Vin models:	100 VDC max.
Conducted noise	EN 55022 class A, without external components	
ESD (electrostatic discharge)	EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A	
Radiated immunity	EN 61000-4-3, 10 V/m, perf. criteria A	
Fast transient / surge (with external input capacitor / diode)	EN 61000-4-4, ± 2 kV, perf. criteria A	
	EN 61000-4-5, ± 2 kV perf. criteria A	
- external input capacitor:	5 Vin models:	Nippon chemi-con KY 1000 μ F/25 V and reverse diode (Vishay V10P45) in parallel
	24 Vin models:	Nippon chemi-con KY 470 μ F/ 50 V
	48 Vin models:	Nippon chemi-con KY 330 μ F/ 100 V
Conducted immunity	EN 61000-4-6, 10 V, perf. criteria A	
External input fuse required (recommended values, slow blow type)	5 Vin models:	5 A
	24 Vin models:	2.5 A
	48 Vin models:	1.5 A

Output Specifications

Voltage set accuracy	± 1.0 % max.	
Regulation	- Input variation	single output models: 0.2 % max. dual output models: 0.5 % max.
	- Load variation 0 – 100 %:	single output models: 0.2 % max.. dual output models balanced load: 1.0 % max. dual output models unbalanced load: 5.0 % max.
Minimum load	not required	
Start up time	30 mS	
Ripple and noise (20 MHz Bandwidth)	3.3 & 5.0 VDC models:	30 mVp-p typ. with cap. 10 μ F/25V X7R MLCC
	12 & 15 VDC models:	40 mVp-p typ. with cap. 10 μ F/25V X7R MLCC
	24 VDC models:	50 mVp-p typ. with cap. 4.7 μ F/50V X7R MLCC
Transient response (25% load step change)	250 μ s typ.	
Current limitation	150 % lout nominal typ. (hiccup mode)	
Short circuit protection	continuous (automatic recovery)	
Over voltage protection	3.3 VDC output models:	3.7 – 5.4 VDC
	5 VDC output models:	5.6 – 7.0 VDC
	12 VDC output models:	13.5 – 19.6 VDC
	15 VDC output models:	18.3 – 22.0 VDC
	24 VDC output models:	29.1 – 32.5 VDC
Capacitive load	3.3 VDC output models:	2100 μ F max.
	5 VDC output models:	1500 μ F max.
	12 VDC output models:	260 μ F max.
	15 VDC output models:	210 μ F max.
	24 VDC output models:	75 μ F max.
	± 5 VDC output models:	860 μ F max. (each output)
	± 12 VDC output models:	150 μ F max. (each output)
	± 15 VDC output models:	100 μ F max. (each output)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Temperature ranges	- Operating - Casing - Storage	-40°C to +88°C (without derating) +105°C max. -55°C to +125°C
Humidity (non condensing)		95 % rel H max.
Temperature coefficient		±0.02 %/K typ.
Switching frequency		250 kHz ±25 kHz. (puls width modulation)
I/O isolation voltage (50Hz, 60sec.)	- to meet UL/IEC/EN 60601-1	5000 VACrms, rated for 250 Vrms working voltage, 2 x MOPP
Clearance/creepage		8 mm min.
Leakage current		2 µA max. (at 240 VAC, 60 Hz)
Isolation capacitance	- Input/Output	17 pF max. (at 100 KHz, 1 V)
Safety standards		ANSI/AAMI ES 60601-1:2005/(R)2012, IEC/EN 60601-1 3rd edition
Safety approvals	- UL online certification UL 60601-1	www.ul.com File E188913, copy: e188913qqhm2.pdf
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>1.1 Mio. h
Casing material		non conductive plastic (UL 94V-0-rated)
Potting material		silicone (UL 94V-0-rated)
Vibration and thermal shock resistance		according to MIL-STD-810F
Weight		14.0 g (0.48 oz)
Soldering temperature		max. 265°C / 10 sec.
Environmental compliance	- Reach - RoHS	www.tracopower.com/products/reach-declaration.pdf according RoHS directive 2011/65/EU



- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

Outline Dimensions

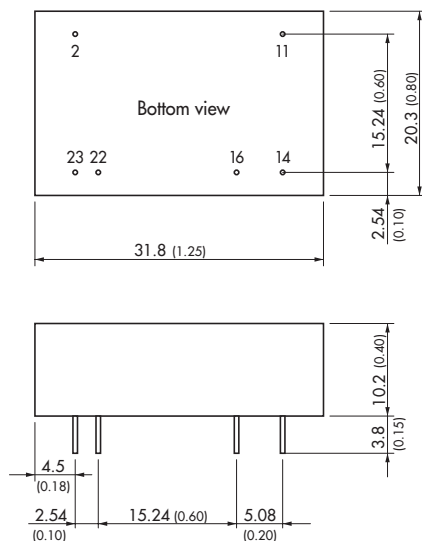

Pin-Out		
Pin	Single	Dual
2	-Vin (GND)	-Vin (GND)
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], () = Inch
 Pin diameter $\varnothing 0.6 \pm 0.1$ (0.024 ±0.004)
 Tolerances ± 0.5 (±0.02)
 Pin pitch tolerances ± 0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com