

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, 125 VAC, 125 VDC



125 VAC · 125 VDC · Quick-Acting F



NNO

Description

- Low Breaking Capacity
- Type D8M 125V (0.16 - 6.3 A), A12M 125V (10 A)

References

General Product Information

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

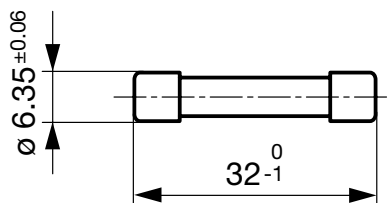
Technical Data

Rated Voltage	125 VAC, 125 VDC
Rated Current	0.16 - 6.3 A
Breaking Capacity	5 kA
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Unit Weight	2.2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Current, Voltage

Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11

Dimensions

32 mm

**Pre-Arcing Time**

Rated Current I_n	1.2 x I_n min.	1.65 x I_n max.	3.0 x I_n max.
0.16 A - 6.3 A	60 min	60 min	400 ms

Variants

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	NNO	Order Number
0.16	125	125	1)	1600	●	7015.6410
0.25	125	125	1)	1400	●	7015.6310
0.4	125	125	1)	500	●	7015.6320
0.63	125	125	1)	750	●	7015.6330
1	125	125	1)	600	●	7015.6340
1.6	125	125	1)	550	●	7015.6420
2.5	125	125	1)	400	●	7015.6360
4	125	125	1)	300	●	7015.6370
6.3	125	125	1)	250	●	7015.6380

1) 5 kA @ 125 VAC , p.f. = 0.3 - 0.4 / 5 kA @ 125 VDC

Packaging Unit

Small Box Pack (10 pcs.)

Time-Current-Curves

