


Frame	Aluminum Die-cast	Notes
Impeller	Metal alloy	Date: 050113
Connection *	Lead wires or Terminal	Environmental Protection: IP55
Motor	AC Shaded pole, Impedance protected	Storage Temp: -40C ~ +100C
Bearing System	Dual Ball bearing	Weight: 480g (1.05 lbs)
Insulation Resistance	>100MOhm at 500VDC	Available AC voltages by special order: 12, 24, 28, 38, 42, 48, 440, 480. Dual speed also available. Call for information.
Dielectric Strength	> 60 seconds at 1500VAC	
Operating Temp Range	-30C ~ +80C (non-condensing)	* Specify configuration: TB = Terminal, Ball bearing; WB = Wire leads, Ball bearing
Life Expectancy	50000 hours (55C)	

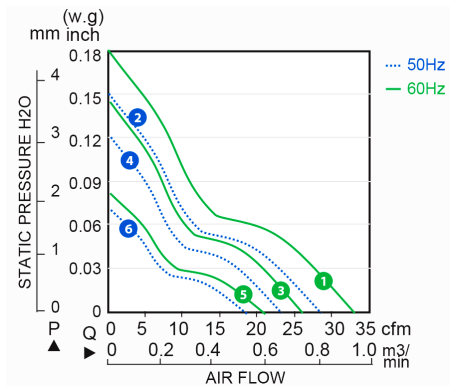

Model No.	Speed (RPM)	Airflow (CFM)	Noise	Volts AC	Voltage Range AC	Watts	Max. Static Pressure ("H ₂ O)	Curves
OA938AP-11-1 * 1855	2700	45	40	115	100 ~ 120	17	0.17	2 (50Hz)
	3150	55				15	0.22	1 (60Hz)
OA938AP-11-2 * 1855	2350	36	33	115	100 ~ 120	13	0.14	4 (50Hz)
	2600	42				11	0.16	3 (60Hz)
OA938AP-11-3 * 1855	1950	29	23	115	100 ~ 120	9	0.12	6 (50Hz)
	1850	27				7	0.11	5 (60Hz)
OA938AP-22-1 * 1855	2700	45	40	230	200 ~ 240	17	0.17	2 (50Hz)
	3150	55				15	0.22	1 (60Hz)
OA938AP-22-2 * 1855	2350	36	33	230	200 ~ 240	13	0.14	4 (50Hz)
	2600	42				11	0.16	3 (60Hz)
OA938AP-22-3 * 1855	1950	29	23	230	200 ~ 240	9	0.12	6 (50Hz)
	1850	27				7	0.11	5 (60Hz)