
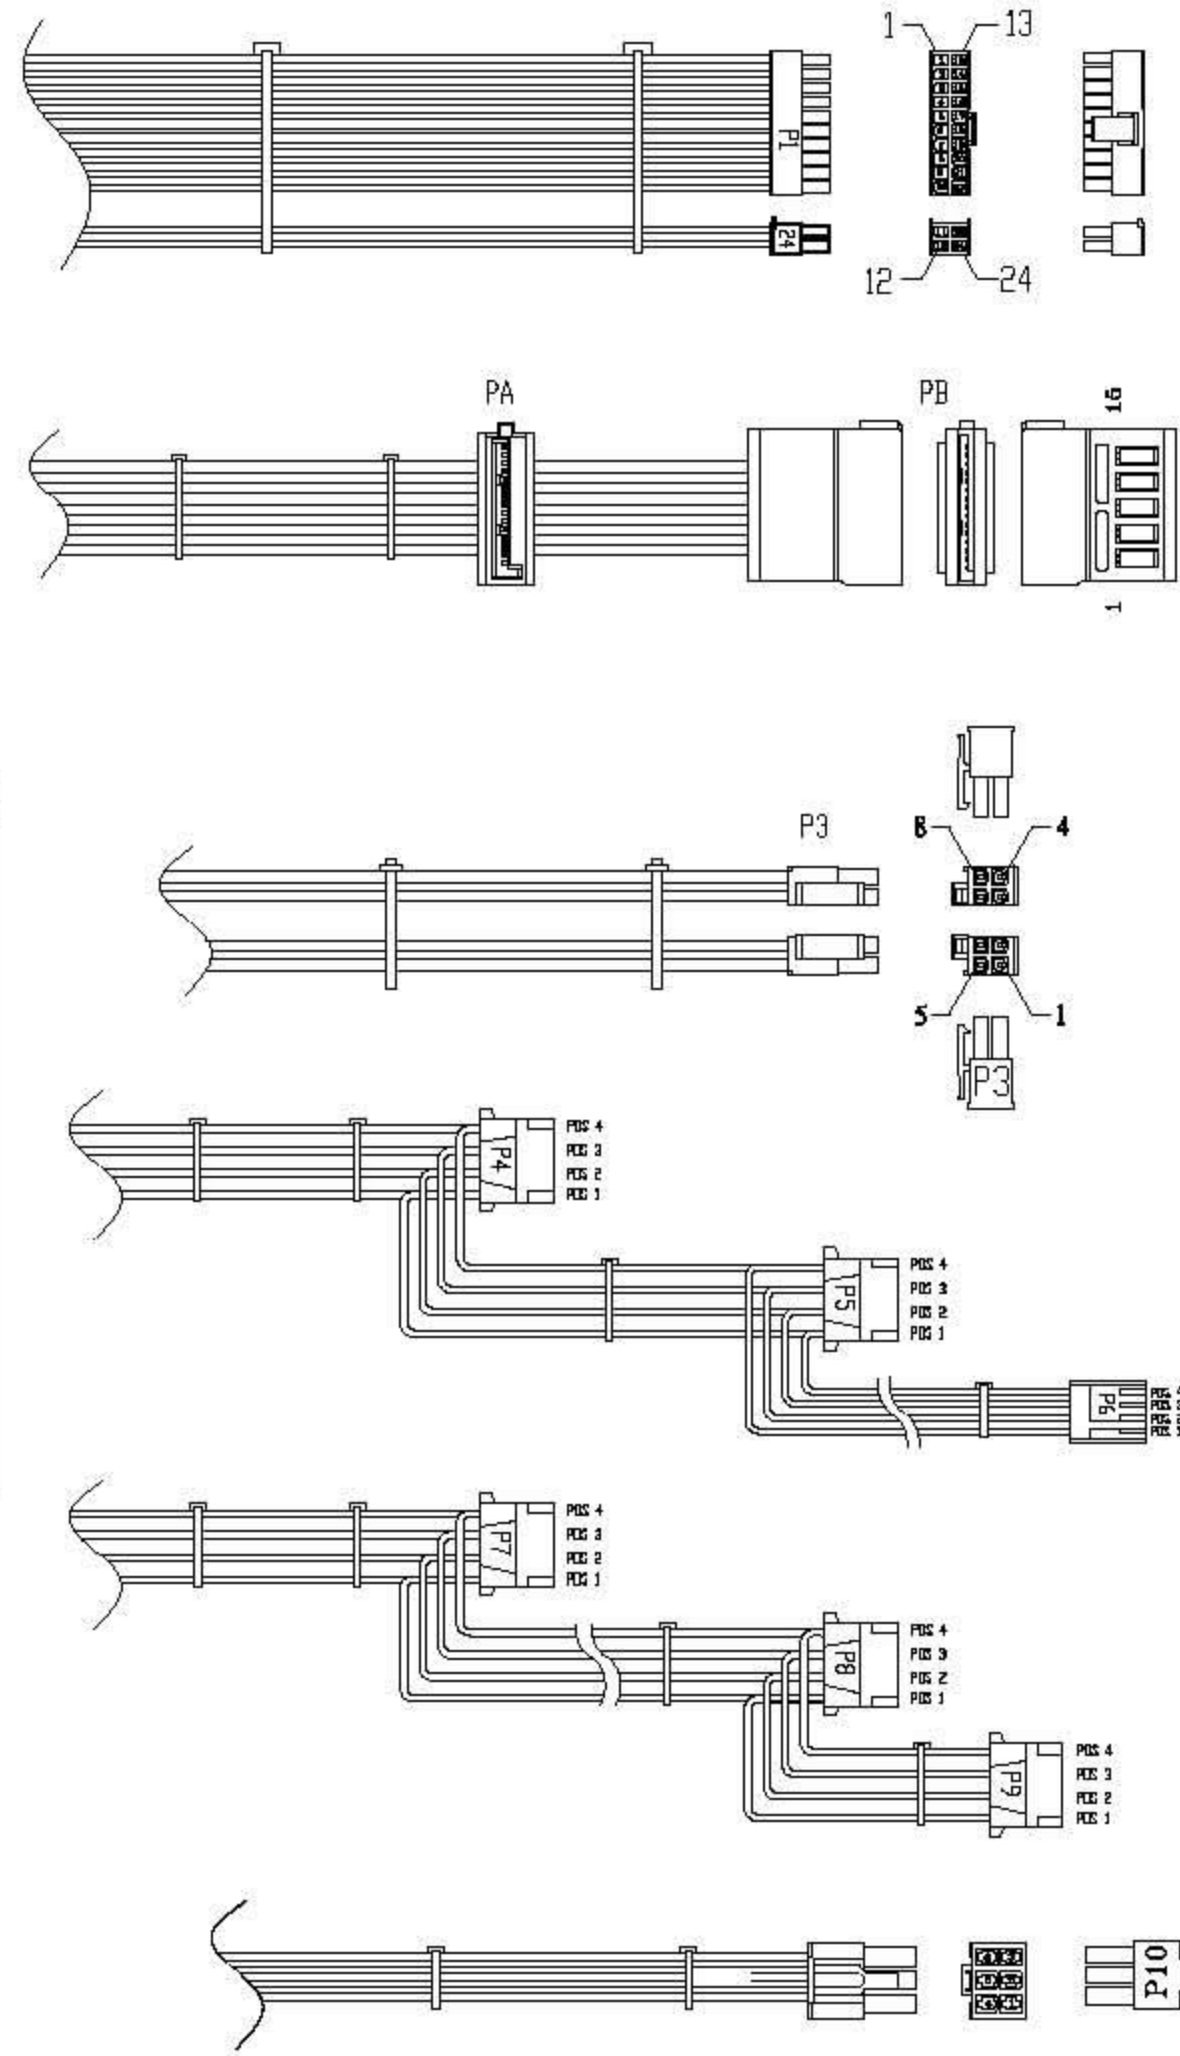


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3VDC	ORANGE	18	JWT C4202H02-A4P +C4202H02-A20P or EQUIV.	550 ⁺²⁰ ₋₁₀ mm
	2	+3.3VDC	ORANGE	18		
	3	COM	BLACK	18		
	4	+5VDC	RED	18		
	5	COM	BLACK	18		
	6	+5VDC	RED	18		
	7	COM	BLACK	18		
	8	PW-ON	GRAY	24		
	9	+5Vsb	PURPLE	20		
	10	+12V3	YELLOW	18		
	11	+12V3	YELLOW	18		
	12	+3.3VDC	ORANGE	18		
	13	+3.3VDC	ORANGE	18		
	14	+3.3V Sense	BROWN	24		
	15	-12VDC	BLUE	24		
	16	COM	BLACK	18		
	17	PS-ON	GREEN	24		
	18	COM	BLACK	18		
	19	COM	BLACK	18		
	20					
	21	+5VDC	RED	18		
	22	+5VDC	RED	18		
	23	+5VDC	RED	18		
	24	COM	BLACK	18		
PA	1	+12V3	YELLOW	18	WST P5-112702T00 or EQUIV.	550 ⁺²⁰ ₋₁₀ mm
	2	COM	BLACK	18		
PB	3	+5V	RED	18	MOLEX CL1270H00 15P or EQUIV.	220 ± 10mm
	4	COM	BLACK	18		
	5	+3.3V	ORANGE	18		
	1	+12V3	YELLOW	18		
	2	COM	BLACK	18		
P3	3	+5V	RED	18	P4-142002K3B + P4-142002K4B or EQUIV.	550 ⁺²⁰ ₋₁₀ mm
	4	COM	BLACK	18		
	5	+3.3V	ORANGE	18		
	6	+12V1	YEL/BLUE	16		
	7	+12V1	YEL/BLUE	16		
	8	+12V2	YEL/GREEN	16		
	1	+12V3	YELLOW	18		
	2	COM	BLACK	18		
P4 P7	3	COM	BLACK	18	MOLEX 1-480424-0 or EQUIV.	500 ⁺²⁰ ₋₁₀ mm
	4	+5V	RED	18		
	1	+12V3	YELLOW	20		
	2	COM	BLACK	20		
P5 P8 P9	3	COM	BLACK	20	MOLEX 1-480424-0 or EQUIV.	200 ± 10mm
	4	+5V	RED	20		
	1	+5V	RED	20		
	2	COM	BLACK	20		
P6	3	COM	BLACK	20	MOLEX 171822-4 or EQUIV.	200 ± 10mm
	4	+12V3	YELLOW	20		
	1	+12V4	YEL/BLACK	18		
	2	+12V4	YEL/BLACK	18		
P10	3	+12V4	YEL/BLACK	18	JWT C4202H00 -2*3PA-RP or EQUIV.	550 ⁺²⁰ ₋₁₀ mm
	4	COM	BLACK	18		
	5	COM	BLACK	18		
	6	COM	BLACK	18		
	1	+12V4	YEL/BLACK	18		
	2	+12V4	YEL/BLACK	18		

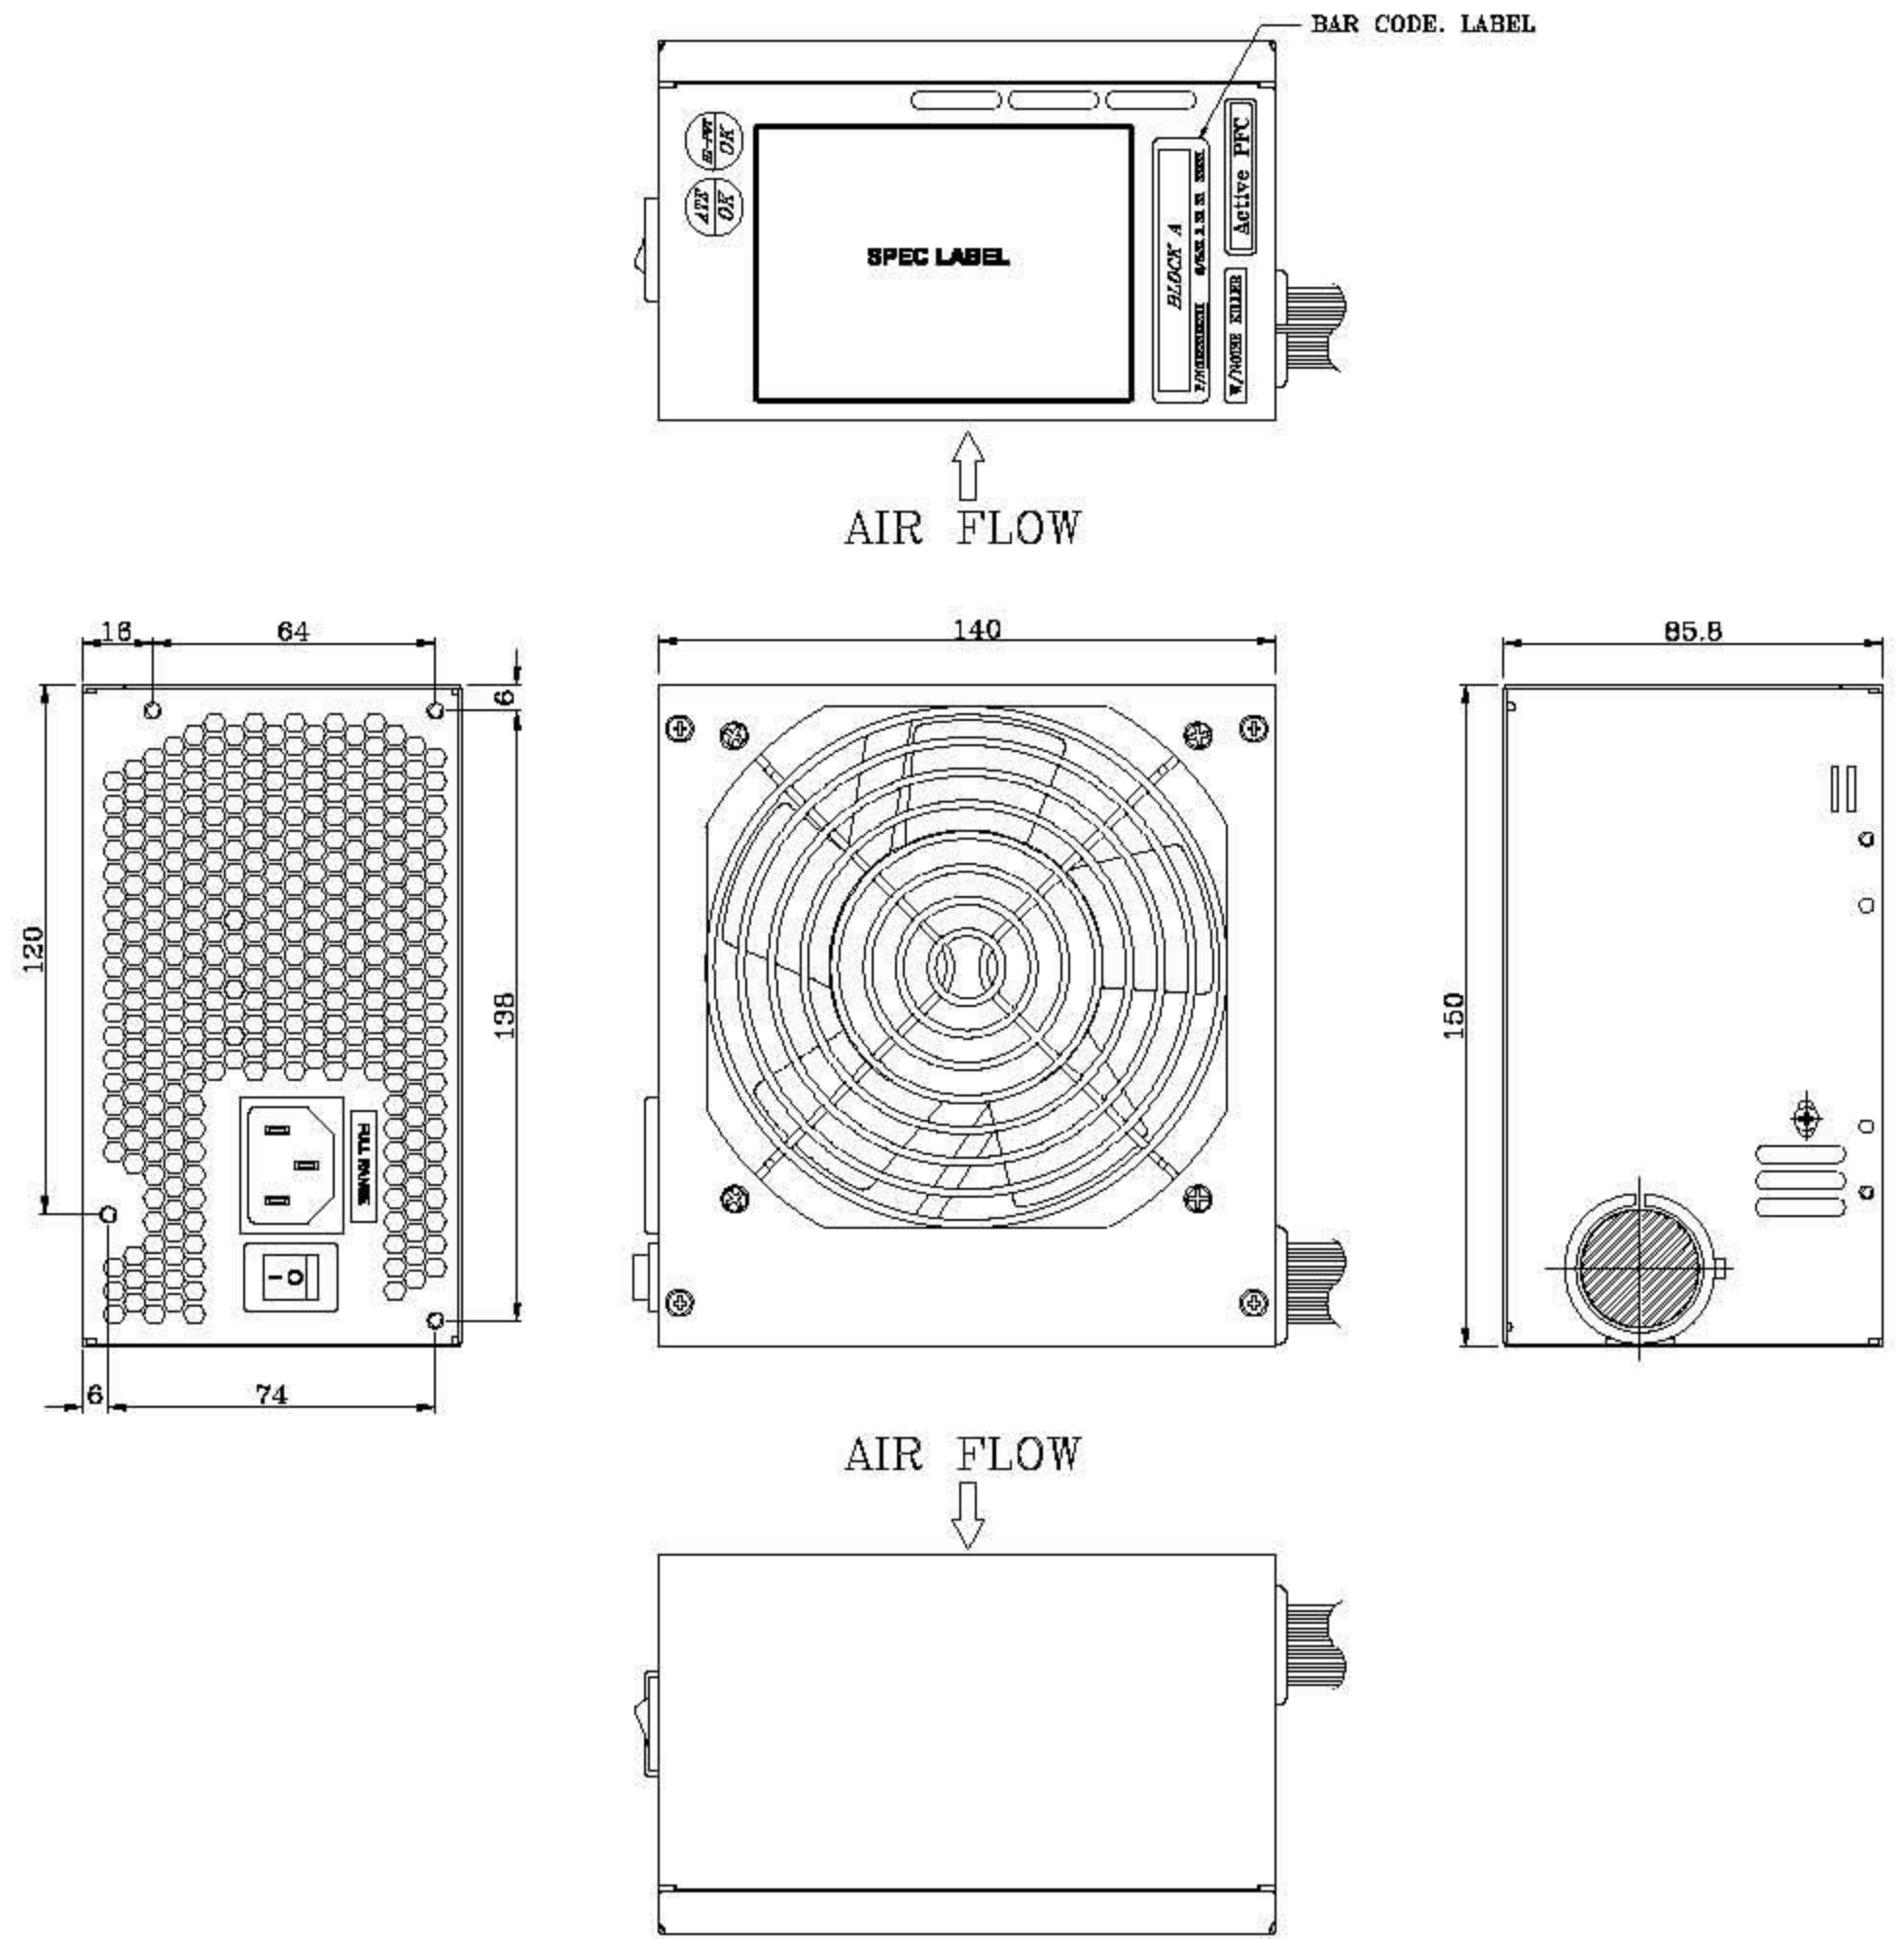

SPI P/N.:SPI600ACHBB

NOTE:
 1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.

UNIT:mm

MODEL NO. : SPI600ACHBB	TITLE: ASSY	SHEET: 1 OF 1	REV:02
R&D(8)	PE	CHECKED	DESIGN
			DRAWN
			DATE
			William
			10.06.2009
INTERIOR COUNTERSIGN:			

發行時間：2007/1/29 9:12 下午

OAD07002377-R2.pdf

1 / 1 禁止翻印外洩