

# CGA6P3X7R1H475K250AD

TDK Item Description : CGA6P3X7R1H475KT\*\*\*B



Equivalent C3225X7R1H475K for Automotive

## Application & Main Feature

Automotive Grade (Conductive Epoxy Application)

## Series

CGA6(3225) [EIA CC1210]



## Dimensions

- L 3.20mm +/-0.45mm
- W 2.50mm +/-0.3mm
- T 2.50mm +/-0.3mm
- B 0.20mm Min.
- G

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

1H (50Vdc)

## Capacitance

4.7uF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

5% Max.


## Insulation Resistance

106Mohm Min.


## AEC-Q200

Yes


## DC Bias Characteristic

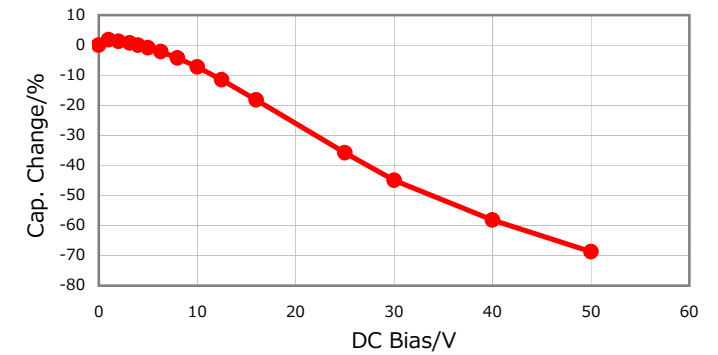


## |Z|, ESR vs. Freq. Characteristics

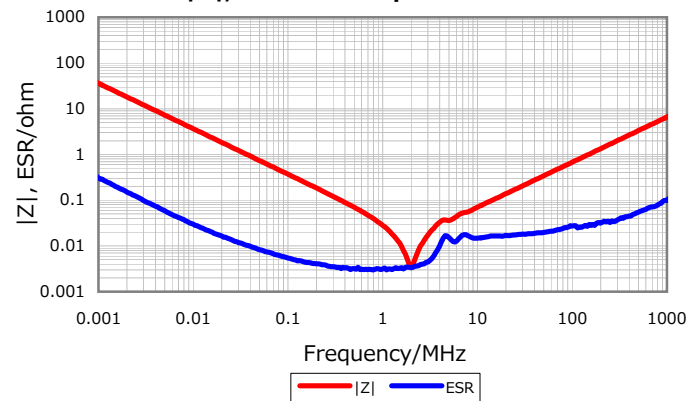


## Temperature Characteristics

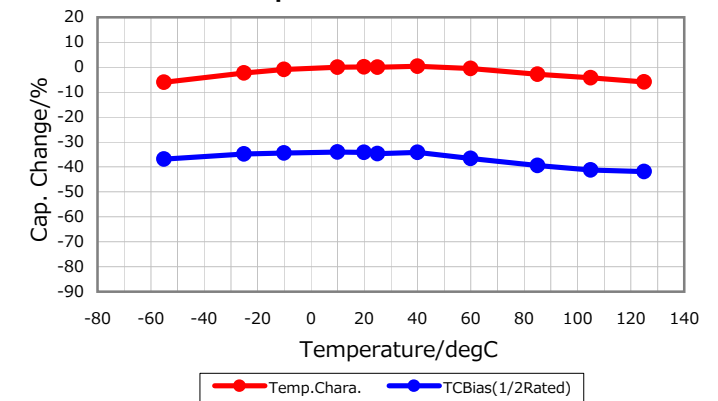

## Cap. vs. Freq. Characteristic

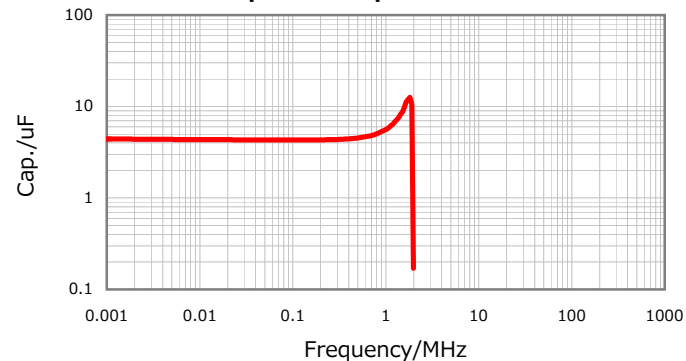

## Ripple Temperature Rise Characteristics

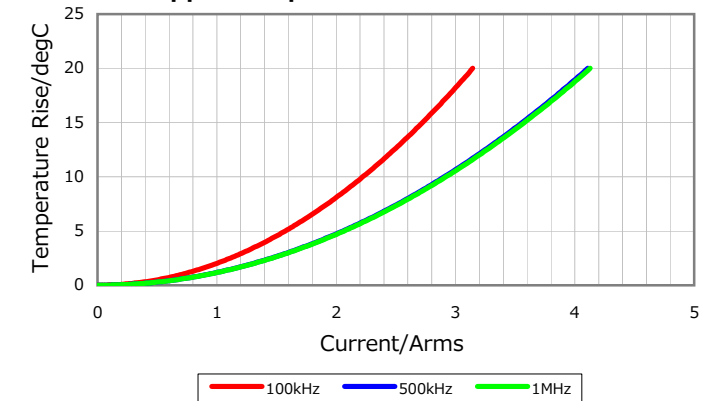

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

January 4, 2016