


NPN SILICON PLANAR SWITCHING TRANSISTOR

2N708



**TO-18
Metal Can Package**

Switching Transistor

ABSOLUTE MAXIMUM RATINGS


DESCRIPTION	SYMBOL	VALUE	UNIT
Collector Emitter Voltage	V_{CEO}	15	V
Collector Emitter Voltage	V_{CER}	20	V
Collector Base Voltage	V_{CBO}	40	V
Emitter Base Voltage	V_{EBO}	5.0	V
Collector Current Continuous	I_C	200	mA
Power Dissipation @ $T_a=25^\circ\text{C}$	P_D	360	mW
Derate Above 25°C		2.1	mW/ $^\circ\text{C}$
Power Dissipation @ $T_c=25^\circ\text{C}$	P_D	1.2	W
@ $T_c=100^\circ\text{C}$		680	mW
Derate above 25°C		6.9	mW/ $^\circ\text{C}$
Derate above 100°C		6.9	mW/ $^\circ\text{C}$
Operating And Storage Junction Temperature Range	T_j, T_{stg}	- 65 to +200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Junction to Case	$R_{th(j-c)}$	145	$^\circ\text{C/W}$
------------------	---------------	-----	--------------------

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter Voltage	$V_{CER(sus)}$	$I_C=30\text{mA}, R_{BE} \leq 10\Omega$	20			V
Collector Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C=30\text{mA}, I_B=0$	15			V
Collector Base Voltage	V_{CBO}	$I_C=1\mu\text{A}, I_E=0$	40			V
Emitter Base Voltage	V_{EBO}	$I_E=10\mu\text{A}, I_C=0$	5.0			V
Collector Cut Off Current	I_{CEX}	$V_{CE}=20\text{V}, V_{BE}=0.25\text{V}, T_a=+125^\circ\text{C}$			10	μA
Collector Cut Off Current	I_{CBO}	$V_{CB}=20\text{V}, I_E=0$			25	nA
		$V_{CB}=20\text{V}, I_E=0, T_a=150^\circ\text{C}$			15	μA
Emitter Cut off Current	I_{EBO}	$V_{BE}=4\text{V}, I_C=0$			80	nA
DC Current Gain	h_{FE}	$I_C=0.5\text{mA}, V_{CE}=1\text{V}$	15			
		$I_C=10\text{mA}, V_{CE}=1\text{V}$	30		120	
		$I_C=10\text{mA}, V_{CE}=1\text{V}, T_a=-55^\circ\text{C}$	15			

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$			0.4	V
		$I_C=7\text{mA}, I_B=0.7\text{mA}, T_a = -55^\circ\text{C to } +125^\circ\text{C}$			0.4	V
Base Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$	0.72		0.8	V
		$I_C=7\text{mA}, I_B=0.7\text{mA}, T_a = -55^\circ\text{C}$			0.9	V

SMALL SIGNAL CHARACTERISTICS

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Transition Frequency	f_T	$I_C=10\text{mA}, V_{CE}=10\text{V}, f=100\text{MHz}$	300			MHz
Output Capacitance	C_{obo}	$V_{CB}=10\text{V}, I_E=0, 100\text{kHz}, \leq f \leq 1\text{MHz}$			6	pF
Extrinsic Base Resistance	$r_{b'}$	$I_C=10\text{mA}, V_{CE}=10\text{V}, f=300\text{MHz}$			50	Ω



SWITCHING TIME

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Storage Time	t_s	$I_C=I_{B1}=I_{B2}=10\text{mA}$			25	ns
Turn On Time	t_{on}	$V_{BE} = -2\text{V}, I_C=10\text{mA}, I_{B1}=3\text{mA}$			40	ns
Turn Off Time	t_{off}	$I_C=10\text{mA}, I_{B1}=3\text{mA}, I_{B2} = -1\text{mA}$			70	ns

2N708


TO-18
Metal Can Package

TO-18 Metal Can Package

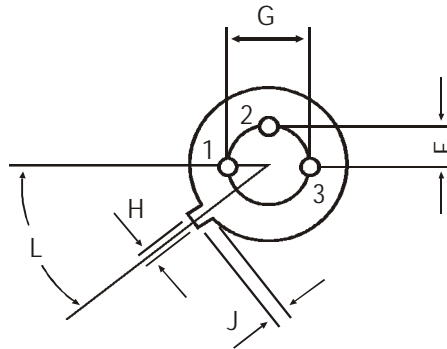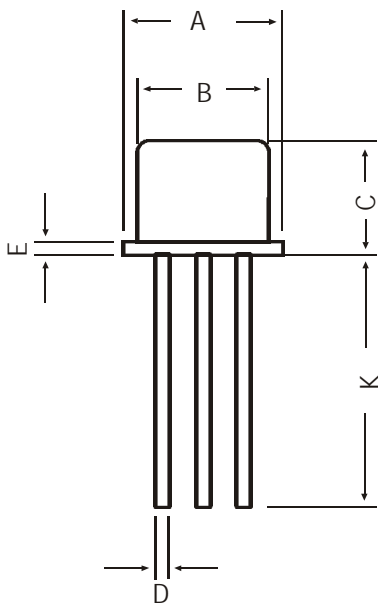

All dimensions in mm.

DIM	MIN	MAX
A	5.24	5.84
B	4.52	4.97
C	4.31	5.33
D	0.40	0.53
E	—	0.76
F	—	1.27
G	—	2.97
H	0.91	1.17
J	0.71	1.21
K	12.70	—
L	45 DEG	



PIN CONFIGURATION

1. EMITTER
2. BASE
3. COLLECTOR

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-18	1K/polybag	350 gm/1K pcs	3" x 7.5" x 7.5"	5K	17" x 15" x 13.5"	80K	34 kgs

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119
email@cdil.com www.cdilsemi.com